


Fast-Acting Glass Fuses

For 1/4" x 7/8" (6.3mm x 22.2mm)


AGW



Dimensional Data

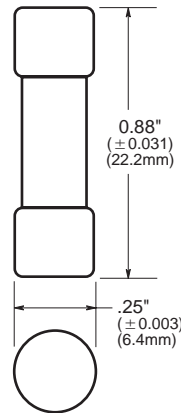

Time-Current Characteristic Curves—Average Melt
(Full Size Curves Available)

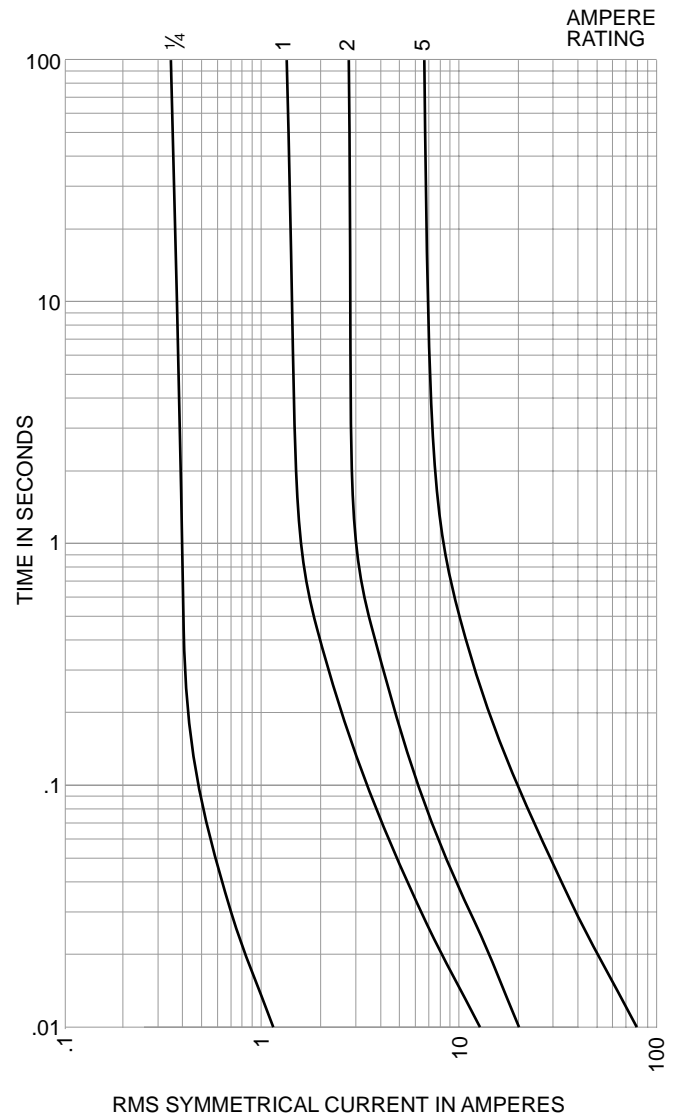

Catalog Symbol: AGW
1/4" x 7/8" (6.3mm x 22.2mm)

Fast-Acting

Voltage Rating: 32 Vac

Body Material: Glass

Ferrule Material: Brass

Ferrule Plating: Nickel

General Information:

- Glass. Formerly 7AG.
- For electronic and small appliance circuits.
- Mounts in Buss in-line holders HHB, HHH, HRK, or 1/4" clips.

Electrical Ratings (Catalog Symbol and Amperes)

32 Volts AC

AGW-1	AGW-3	AGW-7 1/2	AGW-25
AGW-1 1/2	AGW-4	AGW-10	AGW-30
AGW-2	AGW-5	AGW-15	—
AGW-2 1/2	AGW-6	AGW-20	—

Carton Quantity and Weight

Ampere Ratings	Carton Qty.	Weight*	
		Lbs.	Kg.
1-30	100	0.80	363

*Weight per carton.

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.