SPDT Switch

P/N: JXWBKG-T-2-0.4-6

Frequency Range(GHz)	0.4 - 6
Switch Type	Absorptive
Insertion Loss(dB)	2 max
VSWR	1.5 max
Isolation(dB)	60 min
Power Handling(dBm)	35 min
Switch Speed(µs)	1
Control Voltage(V)	±5
Connector	SMA-Female
Temperature Range(ºC)	-55 - +85
ROHS Compliant	Yes

Outline Drawing (Size: mm)

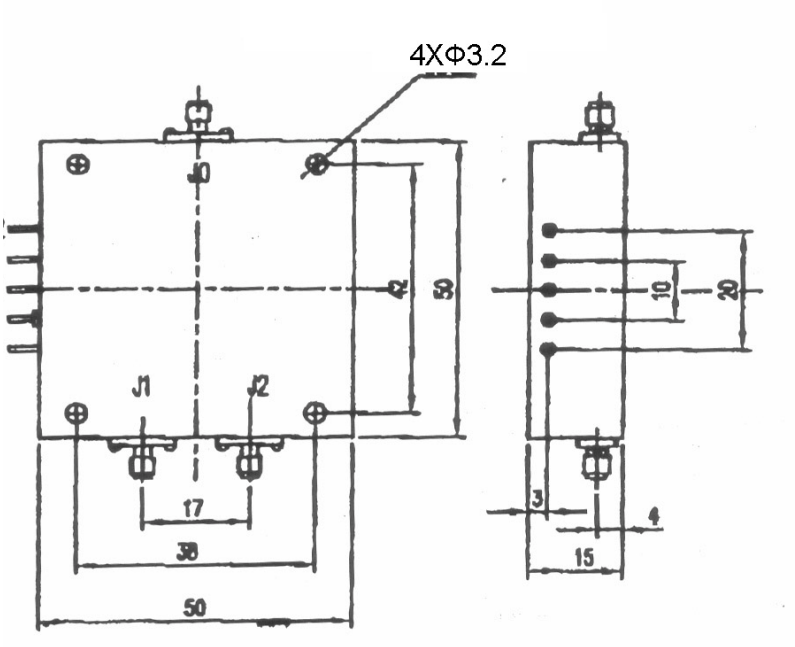

For current data sheets, please contact: sales@aacix.com