




Chicago Miniature Lighting, LLC

Lighting the world since 1910

3990A Series Panel Mounted LED Indicator

3990A Series Panel Mounted LED Indicator

DESCRIPTION AND FEATURES

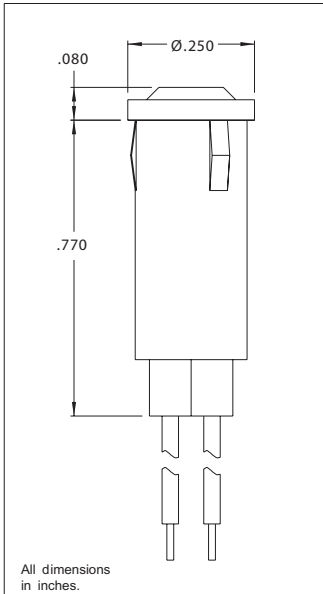

Features

Mounting: Will snap-fit in Ø.217/.221 hole in panels .031/.062 thick.

Wire Leads: No.24 AWG, 4.4/4.8 long, stripped .430/.570

Anode(+): Red lead

Housing: White nylon

Lens: Polycarbonate

ELECTRO-OPTICAL CHARACTERISTICS

Part Number	Color	Typ. Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage Typ. (V)	Forward Voltage Max. (V)	Peak Forward Current @1ms-300pps (A)	Reverse Break-down Voltage Min. (V)
3990A1	Red	10	10	30	2.0	3.0	1.0	5
3990A3	Amber	7	10	30	2.2	3.0	.09	5
3990A5	Green	16	10	30	2.2	3.0	.09	5
3990A7	Yellow	6.3	10	30	2.1	3.0	1.0	5
3991A6-5V	Blue	Use #680 Incandescent Lamp-5V , .06A, 200,000 Hours						

147 Central Avenue
Hackensack, NJ 07601
Phone: (201) 489-8989
Fax: (201) 489-6911

18703 Dix Toledo Road
Brownstown, MI 48193

Saret Zone Franca, Edificio B
Alajuela Costa Rica

E-mail:sales@chml.com • Web Site: www.chml.com

Chicago Miniature Lighting, LLC reserves the right to make specification revisions that enhance the design and/or performance of the product