

## 2N6253 - 2N6254 - 2N6371

### HIGH POWER SILICON NPN TRANSISTORS

The 2N6253, 2N6254, and 2N6371 are silicon NPN transistors intended for a wide variety of high-power applications. The construction of these devices renders them highly resistant to second breakdown over a wide range of operating conditions.

These devices differ in maximum ratings for voltage and power dissipation. All are supplied in JEDEC TO-3 hermetic steel packages.

#### ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings	Value	Unit
$V_{CEO(SUS)}$	Collector-Emitter Voltage	2N6253	45
		2N6254	80
		2N6371	40
$V_{CBO}$	Collector-Base Voltage (*)	2N6253	55
		2N6254	100
		2N6371	50
$V_{CER(SUS)}$	Collector-Emitter Voltage $R_{BE}=100\Omega$	2N6253	55
		2N6254	85
		2N6371	45
$V_{CEV(SUS)}$	Collector-Emitter Voltage $V_{BE}=-1.5V$	2N6253	55
		2N6254	90
		2N6371	50
$V_{EBO}$	Emitter-Base Voltage	2N6253	5
		2N6254	7
		2N6371	5
$I_C$	Collector Current	2N6253	15
		2N6254	
		2N6371	
$I_B$	Base Current	2N6253	7
		2N6254	
		2N6371	

## 2N6253 - 2N6254 - 2N6371

Symbol	Ratings		Value	Unit	
$P_{TOT}$	Power Dissipation	< 25°C	2N6253	115	Watts
			2N6254	150	
			2N6371	117	
		> 25°C	2N6253 2N6254 2N6371	Derate Linearly to 200°C	
$T_J$	Junction Temperature		2N6253 2N6254 2N6371	-65 to +200	°C
$T_S$	Storage Temperature				

### THERMAL CHARACTERISTICS

Symbol	Ratings		Value	Unit
$R_{thJ-C}$	Thermal Resistance, Junction to Case	2N6253	1.5	°C/W
		2N6254	1.17	
		2N6371	1.5	

### ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted

Symbol	Ratings	Test Condition(s)	Min	Typ	Mx	Unit
$V_{CE(SAT)}$	Collector-Emitter Voltage (*)	$I_C=3\text{ A}, I_B=0.3$	-	-	1	V
		$I_C=15\text{ A}, I_B=5$	-	-	4	
		$I_C=5\text{ A}, I_B=0.5$	-	-	0.5	
		$I_C=15\text{ A}, I_B=3$	-	-	4	
		$I_C=8\text{ A}, I_B=0.8$	-	-	1.5	
		$I_C=16\text{ A}, I_B=4$	-	-	4	
$I_{CEO}$	Collector-Emitter Cutoff Current	$V_{CE}=25\text{ V}$	-	-	1.5	mA
		$V_{CE}=60\text{ V}$	-	-	1.0	
$I_{EBO}$	Emitter-Base Cutoff Current	$V_{EB}=-5\text{ V}$	-	-	10	mA
		$V_{EB}=-7\text{ V}$	-	-	0.5	

# 2N6253 - 2N6254 - 2N6371


Symbol	Ratings	Test Condition(s)	Min	Typ	Mx	Unit	
$I_{CEX}$	Collector Cutoff Current	$T_C=150^\circ\text{C}$ $V_{CE}=40\text{ V}$ $V_{BE}=-1.5\text{ V}$	<b>2N6371</b>	-	-	10	mA
			<b>2N6253</b>	-	-	10	
			<b>2N6254</b>	-	-	5.0	
		$T_C=25^\circ\text{C}$ $V_{CE}=45\text{ V}$ $V_{BE}=-1.5\text{ V}$	<b>2N6371</b>	-	-	2.0	
			<b>2N6253</b>	-	-	2.0	
			<b>2N6254</b>	-	-	0.5	
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage (*)	$I_C=0.2\text{ A}, I_B=0\text{ A}$	<b>2N6253</b>	45	-	-	V
			<b>2N6254</b>	80	-	-	
			<b>2N6371</b>	40	-	-	
$V_{CER(SUS)}$	Collector-Emitter Sustaining Voltage (*) $R_{BE}=100\Omega$	$I_C=0.2\text{ mA}$	<b>2N6253</b>	55	-	-	V
			<b>2N6254</b>	85	-	-	
			<b>2N6371</b>	45	-	-	
$V_{CEV(SUS)}$	Base-Emitter Voltage (*)	$I_C=0.1\text{ A}, V_{BE}=-1.5\text{ V}$	<b>2N6253</b>	55	-	-	V
			<b>2N6254</b>	90	-	-	
			<b>2N6371</b>	50	-	-	
$V_{BE}$	Base-Emitter Voltage (*)	$V_{CE}=4\text{ V}, I_C=3\text{ A}$	<b>2N6253</b>	-	-	1.7	V
		$V_{CE}=2\text{ V}, I_C=5\text{ A}$	<b>2N6254</b>	-	-	1.5	
		$V_{CE}=4\text{ V}, I_C=16\text{ A}$	<b>2N6371</b>	-	-	4	
$h_{FE}$	Static Forward Current transfer ratio (*)	$V_{CE}=4\text{ V}, I_C=3\text{ A}$	<b>2N6253</b>	20	-	70	-
		$V_{CE}=4\text{ V}, I_C=15\text{ A}$		3	-	-	
		$V_{CE}=2\text{ V}, I_C=5\text{ A}$	<b>2N6254</b>	20	-	70	
		$V_{CE}=4\text{ V}, I_C=15\text{ A}$		5	-	-	
$h_{fe}$	Small Signal Current Gain	$V_{CE}=4\text{ V}, I_C=1\text{ A}, f=1\text{ kHz}$	<b>2N6253</b>	10	-	-	-
			<b>2N6254</b> <b>2N6371</b>				
$f_T$	Transition Frequency	$V_{CE}=4\text{ V}, I_C=1\text{ A}$	<b>2N6253</b>	-	-	-	kHz
			<b>2N6254</b>	-	-	-	
			<b>2N6371</b>	800	-	-	
$I_{S/b}$	Second Breakdown Collector Current $t_p=1\text{ s}, \text{ non rep.}$	$V_{CE}=45\text{ V}$	<b>2N6253</b>	2.55	-	-	A
			<b>2N6254</b>	1.87	-	-	
			<b>2N6371</b>	2.9	-	-	

(\*) Pulse Width  $\approx 300\ \mu\text{s}$ , Duty Cycle  $\angle 2.0\%$

# 2N6253 - 2N6254 - 2N6371

## MECHANICAL DATA CASE TO-3

DIMENSIONS		
	mm	inches
A	25,45	1
B	38,8	1,52
C	30,09	1,184
D	17,11	0,67
E	9,78	0,38
G	11,09	0,43
H	8,33	0,32
L	1,62	0,06
M	19,43	0,76
N	1	0,04
P	4,08	0,16

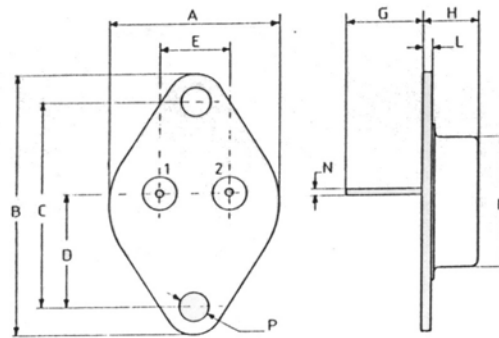

Pin 1 :	Base
Pin 2 :	Emitter
Case :	Collector

*Information furnished is believed to be accurate and reliable. However, CS assumes no responsibility for the consequences of use of such information nor for errors that could appear.  
Data are subject to change without notice*