

# FCX - A SERIES SMALL FLANGE LEVEL TRANSMITTER


## DATA SHEET

FHY, FKY...2

The FCX -A Series small flange level transmitter accurately measures liquid level and transmits a proportional 4 to 20mA signal. The transmitter utilizes a unique micromachined capacitive silicon sensor with state-of-the-art microprocessor technology to provide exceptional performance and functionality.

## FEATURES

1. Directly connectable to 1-1/2 in. and 2 in. flanges  
The transmitter is connectable to 1-1/2 in. and 2 in. pipes without a reducer.
2. Minimum environmental influence  
The "Advanced Floating Cell" design which protects the pressure sensor against changes in temperature, static pressure, and overpressure substantially reduces total measurement error in actual field applications.
3. Smart / Traditional convertible  
Fuji micro-electronics manufacturing technology offers free selection of Smart / Traditional transmitters.  
A small plug-in communication module upgrades your model FHY to smart type model FKY, which has full remote communication capabilities. A Hand Held Communicator (HHC), model FXW can remotely display or reconfigure all transmitter parameters at any point on the loop without affecting the transmitter signal.
4. Fuji/HART bilingual communication module  
The communication module is "bilingual" to speak both Fuji proprietary protocol and HART. Any HART compatible devices can communicate with FCX-A/C series transmitters.
5. Application flexibility  
Example options that render the FCX -A suitable for almost any process applications includes:
  - Analog indicator at either the electronics side or terminal side
  - Full range of hazardous area approvals
  - Built-in RFI filter and lightning arrestor
  - 4½ digits LCD meter
  - Stainless steel electronics housing
  - Wide selection of materials
  - High temperature, vacuum service.

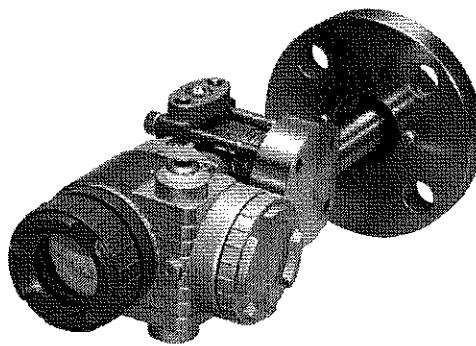

## SPECIFICATIONS

### Functional specifications

#### Type:

Model FHY: 4 to 20mA, Traditional type

Model FKY: 4 to 20mA with digital signal, Smart type

Service: Liquid, gas, or vapour

Static pressure, span, and range limit:

Type	Static pressure	Span limit [kPa] {m bar}			Range limit [kPa] {m bar}	
				FHY/FKY		
		Min.	Max.			
FHY□□5	Up to flange rating	13 (130)	3 (30)	130 (1300)	+/- 130 { +/- 1300}	
		50 (500)	12.5 (125)	500 (5000)	+/- 500 { +/- 5000}	

— Lower limit of static pressure (vacuum limit) ;

Silicone fill sensor: See Fig . 1

Fluorinated fill sensor: 66kPa abs (500mmHg abs) at temperature below 60 °C.

— The maximum span of each sensor can be converted to different units using factors as below.

1MPa=10³kPa=10bar=10.19716kgf/cm²=145.0377psi

1kPa=10mbar=101.9716mmH₂O=4.01463inH₂O


Overrange limit: To maximum static pressure limit  
Output signal:

Model FHY: 4 to 20mA DC 2-wire, linear signal

Model FKY: 4 to 20mA DC with digital signal superimposed on the 4 to 20mA signal

**Power supply:** Transmitter operates on 10.5V to 45V DC at transmitter terminals.  
10.5V to 32V DC for the units with optional arrester.

**Load limitations:** see figure below

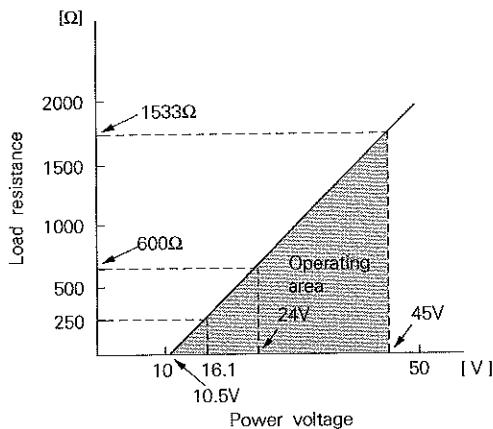

Note: For communication with FXW, min. of 250Ω required.

#### Hazardous locations:

Authorities	Flameproof	Intrinsic safety	Type N Nonincendive
BASEEFA Factory Mutual	Ex ds IIC T5, T6 Class I II III Div. 1 Groups B thru. G Ex ds IIB+H <sub>2</sub> T4	EEx ia IIC T4, T5 Class I II III Div. 1 Groups A thru. F I2G4	Ex N II T5 Class I II III Div. 2 Groups A thru. G
RIIS			—

#### Zero/span adjustment:

Model FHY: Zero is adjustable externally from the adjustment screw (UP and DOWN). The adjustment screw can also function to adjust span when MODE SWITCH (located on the electronics unit) is in the span mode. INHIBIT mode to disable the adjustment screw is also available.

Model FKY: Zero and span are adjustable from the HHC. Zero is also adjustable externally from the adjustment screw.

**Damping:** Adjustable electrical damping.

Model FHY: The time constant is adjustable to 0, 0.3, 1.2, 4.8, or 19.2 seconds.

Model FKY: The time constant is adjustable between 0 to 38.4 seconds.

#### Zero elevation/suppression:

– 100% to + 100% of URL

#### Normal/reverse action:

Model FHY: Selectable by moving a jumper pin located on the electronics unit.

Model FKY: Selectable from HHC

**Indication:** Analog indicator or 4½ -digit LCD meter, as specified.

**Burnout direction:** Output hold  
Output 21.6mA selectable.  
Output 3.8mA

Model FHY: Unless otherwise specified, the output is in hold position.

Model FKY: Selectable from HHC

#### Loop-check output:

Model FHY: Transmitter can output constant signal of 4mA, 12mA, or 20mA if MODE SWITCH is set to the loop check mode.

Model FKY: Transmitter can be configured to provide constant signal 3.8mA through 21.6mA by HHC.

#### Temperature limit:

Ambient: – 15 to + 65°C

(– 15 to + 65°C for LCD indicator)

(– 15 to + 60°C for arrester option)

(– 10 to + 60°C for fluorinated oil fill transmitter)

(– 10 to + 60°C for silicon oil "H", "S")

For explosionproof units (flameproof or intrinsic safety), ambient temperature must be within the limits specified in each standard.

#### Process:

Fill fluid	13th digit of "Code symbols"	Process temperature	Lower limit of static press
Fluorinated oil	W, A and D	– 20 to 80°C	Atmospheric pressure
Silicone oil	H	0 to 250°C	
	Y and G	– 40 to 120°C	2.7kPa abs (20.3mmHg abs)
	S	0 to 250°C	

Low pressure side contact liquid temperature on transmitter of Code H, S, is 120°C or lower.

Storage: – 40 to + 70°C

Humidity limit: 0 to 100% RH

Communication: (Model FKY only)

With HHC (Model FXW, consult Data Sheet No. EDS8-47), following information can be remotely displayed or reconfigured.

Items	Display	Set
Tag No.	v	v
Model No.	v	v
Serial No.	v	—
Engineering unit	v	v
Range limit	v	—
Measuring range	v	v
Damping	v	v
Output mode	v	v
Burnout direction	v	v
Adjustment	v	v
Output adjust	—	v
Data	v	—
Self diagnoses	v	—
Printer	—	—
External switch lock	v	v
Transmitter display (*)	v	v

(\*) HHC's version must be more than 5.0  
(or FXW □□□□I-□2), to use this function.

## Performance specifications

**Accuracy rating:** (including linearity, hysteresis, and repeatability)

For spans greater than 1/10 of URL:  $\pm 0.25\%$  of span

For spans below 1/10 of URL (Model FKY only):

$$\pm \left( 0.17 + 0.08 \frac{0.1 \times \text{URL}}{\text{Span}} \right) \% \text{ of span}$$

**Linearity:** 0.1% of calibrated span

**Stability:**  $\pm 0.2\%$  of upper range limit (URL) for 6 months

### Temperature effect:

Effects per 55°C change between the limits of -15°C and +65°C

Zero shift;  $\pm 1\%/55^\circ\text{C}$

( $x$  equal to 1/2 URL or more)

$$\text{Zero shift;} \pm \frac{\text{URL}}{2 \times x} \% / 55^\circ\text{C}$$

( $x$  less than 1/2 URL)

Total shift;  $\pm 1.5\%/55^\circ\text{C}$

( $x$  equal to 1/2 URL or more)

$$\text{Total shift;} \pm \left( 0.5 + \frac{\text{URL}}{2 \times x} \right) \% / 55^\circ\text{C}$$

( $x$  less than 1/2 URL)

High performance type (option) ...

Zero shift;  $\pm 1\%/55^\circ\text{C}$

( $x$  equal to 1/6.5 URL or more)

$$\text{Zero shift;} \pm \left( \frac{\text{URL}}{6.5 \times x} \right) \% / 55^\circ\text{C}$$

( $x$  less than 1/6.5 URL)

Total shift;  $\pm 1.5\%/55^\circ\text{C}$

( $x$  equal to 1/6.5 URL or more)

$$\text{Total shift;} \pm \left( 0.5 + \frac{\text{URL}}{6.5 \times x} \right) \% / 55^\circ\text{C}$$

( $x$  less than 1/6.5 URL)

Where,  $x$ : Calibrated span

URL: Maximum span (Upper Range Limit)

Note: 2.5 times the effects for material code (7th digit) "H", "M", "T", "B", "L", "U".

### Static pressure effect:

Zero shift:  $\pm 0.2\%$  of URL/1MPa (10 bar)

Span shift: -0.2% of calibrated span for flange rating pressure

2.5 times the zero shift for material code "H", "M", "T", "B", "L", "U".

**OVERRANGE effect:** Zero shift;  $\pm 0.3\%$  of URL for flange nominal pressure

2.5 times the effects for material code "H", "M", "T", "B", "L", "U".

### Supply voltage effect:

Less than 0.05% of calibrated span per 10V

**RFI effect:** Less than 0.2% of URL for the frequencies of 20 to 1000MHz and field strength 30 V/m when electronics covers on.

**Step response:** (without electrical damping)

Time constant	Dead time
0.3 s	approx. 0.3 s

### Mounting position effect:

Zero shift, less than 0.3kPa(3m bar) for a 10° tilt in any plane. (No extension)  
No effect on span.

This error can be corrected by adjusting zero.

(Double the effect for fluorinated fill sensors)

### Dielectric strength:

500V AC, 50/60Hz 1 min., between circuit and earth.

### Insulation resistance:

More than 100MΩ at 500V DC.

**Turn-on time:** 4 sec

**Internal resistance for external field indicator:**

12Ω or less

## Physical specifications

### Electrical connections:

G1/2, 1/2-14 NPT, Pg13.5, or M20 x 1.5 conduit, as specified.

### Process connections:

LP side: 1/4-18 NPT or Rc1/4.

HP side: ANSI, or JIS raised face flange.  
See OUTLINE DIAGRAM for detailed dimensions.

Refer to "Code symbols"

### Process-wetted parts material:

Material code (7th digit in "Code symbols")	LP side			HP side
	Process cover	Diaphragm	Wetted sensor body	Diaphragm & flange face
V	316 stainless steel (**)	316L stainless steel	316 stainless steel	316L stainless steel
H	316 stainless steel (**)	Hastelloy-C	Hastelloy-C lining	Hastelloy-C
M	316 stainless steel (**)	Monel	Monel lining	Monel
T	316 stainless steel (**)	Tantalum	Tantalum lining	Tantalum
B	Hastelloy-C lining	Hastelloy-C	Hastelloy-C lining	Hastelloy-C
L	Monel lining	Monel	Monel lining	Monel
U	Tantalum lining	Tantalum	Tantalum lining	Tantalum

(1) Sensor O-rings: Viton or teflon selectable

(2) SCS14 Per JIS G5121

### Non-wetted parts material:

Electronics housing: Low copper die-cast aluminum alloy (standard), finished with epoxy/polyurethane double coating, or 316 stainless steel, as specified.

Bolts and nuts: Cr-Mo alloy (standard) or 304 stainless steel

Fill fluid: Silicone oil (standard) or fluorinated oil (Daifloil)

Mounting flange: Carbon steel or 304 stainless steel, as specified

### Environmental protection:

IEC IP67 and NEMA 4X

### Flange mounting:

See drawings

**Mass{weight}:** Transmitter approximately 13kg without options.

Add: 0.5kg for mounting bracket

0.8kg for indicator option

4.5kg for stainless steel housing option

1.0kg per 50mm extension of diaphragm

## Optional features

- Indicator:** A plug-in analog indicator (1.5% accuracy) can be housed in the electronics compartment or in the terminal box of the housing.  
An optional 4½ digits LCD meter is also available.
- Arrester:** A built-in arrester protects the electronics from lightning surges.  
Lightning surge immunity is 4kV (1.2 x 50µs).
- Oxygen service:** Special cleaning procedures are followed throughout the process to maintain all process wetted parts oil-free.  
The fill fluid is fluorinated oil.
- Chlorine service:** Oil-free procedures as above. Includes fluorinated oil for fill.
- Degreasing:** Process-wetted parts are cleaned, but the fill fluid is standard silicone oil. Not for use on oxygen or chlorine measurement.
- Vacuum service:** Special silicone oil and filling procedure are applied.  
See below figure.

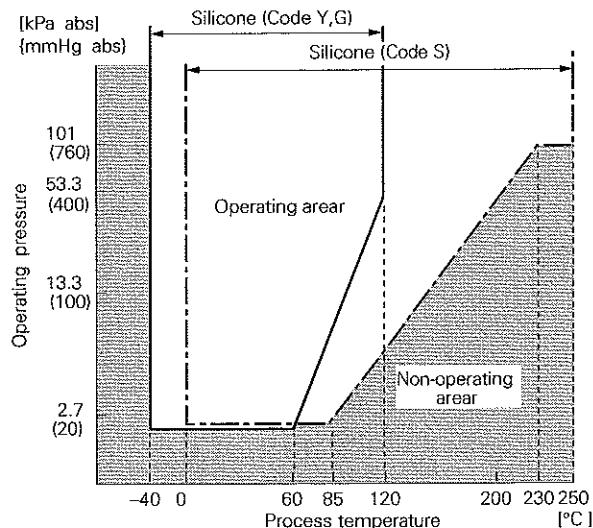


Fig. 1 Relation between process temperature and operating pressure

- Customer tag:** A stainless steel tag with customer tag data is wired to the transmitter.
- Coating of cell:** Cell's surface is finished with epoxy/polyurethane double coating.  
Specify if environment is extremely corrosive.

## ACCESSORIES

- Oval flanges:** (Model FFP, refer to Data Sheet No. EDS6-10)  
Converts process connection to 1/2-14 NPT or to Rc1/2; in carbon steel or in 316 stainless steel.
- Hand held communicator:** (Model FXW, refer to Data Sheet No. EDS 8-47)
- Communication module:** (Standard for model FKY)  
When using this module for model FHY, remote setting function becomes available.
- Remark:** When the communication module is connected, the operation mode of external zero/span adjustment screw is changed to zero adjustment.

The product conforms to the requirements of the Electromagnetic compatibility Directive 89/336/EEC as detailed within the technical construction file number TN510412. The applicable standards used to demonstrate compliance are :-

### EMI (Emission) EN 50081-1 : 1992

Test item	Frequency range	Basic standard
Applicable Electromagnetic Radiation Disturbance	30-1000MHz	EN55022 Class B

### EMS (Immunity) EN 50082-1 : 1992

No.	Test item	Test specification	Basic standard	Performance criteria
1	Electrostatic discharge	8kV (Air)	IEC 801-2 : 1984	B
2	Radio-frequency electromagnetic field	27-500MHz 3V/m (Unmodulated)	IEC 801-3 : 1984	A
3	Fast transients common mode	0.5kV 5/50(Tr/Th)ns 5kHz Rep.	IEC 801-4 : 1984	B

"LVD - The transmitter is not covered by the requirements of the LVD standard."

## CODE SYMBOLS

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
F	Y				2	-								



		Description		
		Type		
FHY		4 to 20mA, Traditional type		
FKY		4 to 20mA with digital signal, Smart type		
		Connections		
		Process connection	Oval flange screw	Conduit connection
S		Rc1/4	7/16-20UNF	G 1/2
T		1/4-18NPT	7/16-20UNF	1/2-14NPT
V		1/4-18NPT	M10	Pg 13.5
W		1/4-18NPT	M10	M20x1.5
X		1/4-18NPT	7/16-20UNF	Pg 13.5
		Mounting flange		
		Material	Size and rating	
0		304 stainless steel	JIS 10K 40A	
1			JIS 10K 50A	
2			JIS 20K 40A	
3			JIS 20K 50A	
4			JIS 30K 40A	
5			JIS 30K 50A	
A			ANSI/JPI 150LB 1½B	
B			ANSI/JPI 150LB 2B	
C			ANSI/JPI 300LB 1½B	
D			ANSI/JPI 300LB 2B	
G		Carbon steel	JIS 10K 40A	
H			JIS 10K 50A	
J			JIS 20K 40A	
K			JIS 20K 50A	
L			JIS 30K 40A	
M			JIS 30K 50A	
Q			ANSI/JPI 150LB 1½B	
R			ANSI/JPI 150LB 2B	
S			ANSI/JPI 300LB 1½B	
T			ANSI/JPI 300LB 2B	
		Span limit [kPa] {m bar}		
		FHY		FKY
5		13...130 {130...1300}		3...130 { 30...1300}
6		50...500 {500...5000}		12.5...500 {125...5000}
		Material		
		LP side		HP side
		Process cover	Diaphragm	Wetted sensor body
V		316 stainless steel	316L stainless steel	316 stainless steel
H			Hastelloy-C	Hastelloy-C lining
M		316 stainless steel	Monel	Monel lining
T		316 stainless steel	Tantalum	Tantalum lining
B		Hastelloy-C lining	Hastelloy-C	Hastelloy-C lining
L		Monel lining	Monel	Monel lining
U		Tantalum lining	Tantalum	Tantalum lining

1	2	3	4	5	6	7	8
F	Y				2	-	


9	10	11	12	13	-	14	15
					-		

Description							
<b>Indicator and arrester</b>							
A	Indicator		Arrester				
B	None		None				
D	Analog, 0 to 100% linear scale		None				
J	Analog, custom scale		None				
E	Analog, double scale		None				
F	None		Yes				
H	Analog, 0 to 100% linear scale		Yes				
K	Analog, custom scale		Yes				
L	Analog, double scale		Yes				
P	Digital, 0 to 100%		None				
Q	Digital, custom scale		None (Model FKY only)				
S	Digital, 0 to 100%		Yes				
	Digital, custom scale		Yes (Model FKY only)				
<b>Approvals for hazardous locations</b>							
A	None (for ordinary locations)						
B	JIS, Flameproof (Conduit seal)						
C	JIS, Flameproof (Cable gland seal)						
D	FM, Flameproof (or explosionproof)						
M	BASEEFA, Flameproof (Conduit seal)						
N	BASEEFA, Flameproof (Cable gland seal) (Conduit connection G 1/2 only)						
G	JIS, Intrinsic safety						
H	FM, Intrinsic safety and nonincendive						
K	CENELEC, Intrinsic safety						
P	CENELEC, Intrinsic safety and BASEEFA, Type N						
<b>Diaphragm extension [mm]</b>							
Y	Extension [mm]	Applicable material code					
A	0	Any					
B	50						
C	100		(7th digit code "V" only, 1 1/2 in. flange is not applicable)				
D	150						
	200						
<b>Stainless steel parts</b>							
Y	Stainless steel tag plate	Stainless steel elec. housing		Coating of cell			
B	None	None		None			
C	Yes	None		None			
E	None	Yes		None			
M	Yes	Yes		None			
N	None	None		Yes			
P	Yes	None		Yes			
Q	None	Yes		Yes			
	Yes	Yes		Yes			
<b>Special applications and fill fluid</b>							
Y	Treatment	Fill fluid					
W	None (standard)	Silicone oil					
G	None (standard)	Fluorinated oil					
A	Degreasing	Silicone oil					
D	Oxygen service	Fluorinated oil (7th digit code "V" only)					
H	Chlorine service	Fluorinated oil (7th digit code "H", "T", "B" and "U")					
S	High temp. 250°C	Silicone oil (7th digit code "V" only)					
	High temp. and vacuum (250°C)	Silicone oil (7th digit code "V" only)					
<b>O-ring and Teflon membrane</b>							
A	O-ring	Teflon membrane					
B	Viton	None					
C	Teflon	None					
D	Viton	Yes					
	Teflon	Yes	(11th digit code "Y" only)				
<b>Bolt/nut</b>							
A	Cr-Mo alloy hexagon socket head cap screw/carbon steel nut						
B	Cr-Mo alloy hexagon bolt/nut						
E	304 stainless steel/304 stainless steel						


# OUTLINE DIAGRAM (Unit:mm)

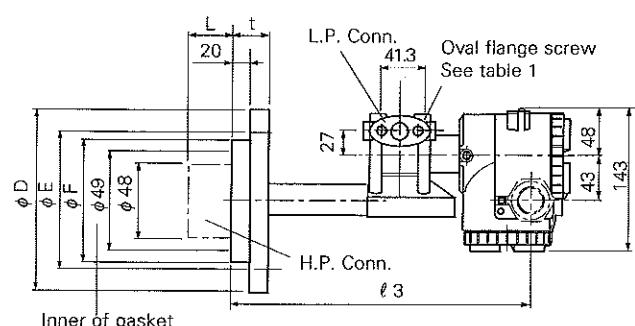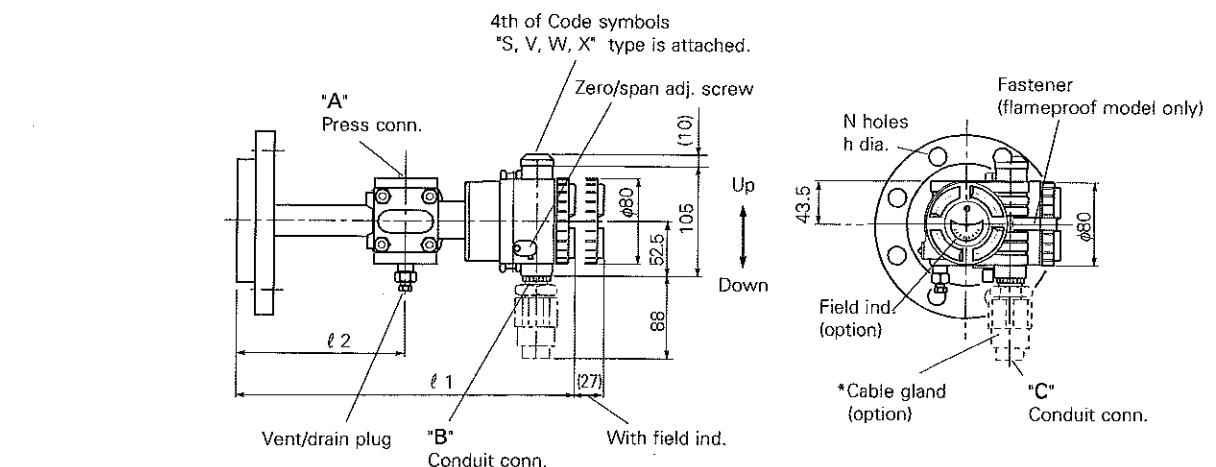


Details of "A"




Details of "B"



Details of "C"



## CONNECTION DIAGRAM




11th digit of Code symbols	L [mm]	Mass approx. [kg]	ℓ <sub>1</sub>	ℓ <sub>2</sub>	ℓ <sub>3</sub>
Y	0	9.5 to 12	323	150	286
A	50	10 to 17			
B	100	10.5 to 17.5	317	144	290
C	150	11 to 18			
D	200	11.5 to 18.5			

5th digit of Code symbols	φ D	φ E	t	N-φ h	Flange
0, G	140	105	36	4-19	JIS-10K-40A
1, H	155	120	36	4-19	JIS-10K-50A
2, J	140	105	38	4-19	JIS-20K-40A
3, K	155	120	38	8-19	JIS-20K-50A
4, L	160	120	42	4-23	JIS-30K-40A
5, M	165	130	42	8-19	JIS-30K-50A
A, Q	127	98.4	37.5	4-16	ANSI/JPI-150LB-1 1/2B
B, R	152	120.6	39.5	4-20	ANSI/JPI-150-2B
C, S	156	114.3	41	4-23	ANSI/JPI-300LB-1 1/2B
D, T	165	127	42.5	8-20	ANSI/JPI-300LB-2B


4th digit of Code symbols	Conduit conn.			Press. conn.	Oval flange screw	Earth terminal
	J	K	M	N		
S	G1/2	17	8	Rc1/4	7/16-20UNF screw depth 13	M4
T	1/2-14NPT	16	5	1/4-18NPT	7/16-20UNF screw depth 13	No. 8-32UNC
V	Pg13.5	8	4.5	1/4-18NPT	M10 screw depth 13	M4
W	M20x1.5	16	5	1/4-18NPT	M10 screw depth 13	M4
X	Pg13.5	8	4.5	1/4-18NPT	7/16-20UNF screw depth 13	M4

Table 1


<Optional stainless steel tag>

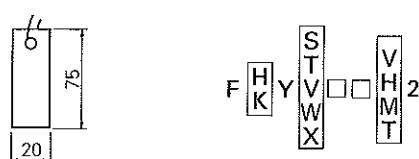

Note \*: Cable gland is supplied only for flameproof packing type.  
Φ11 cable is suitable.

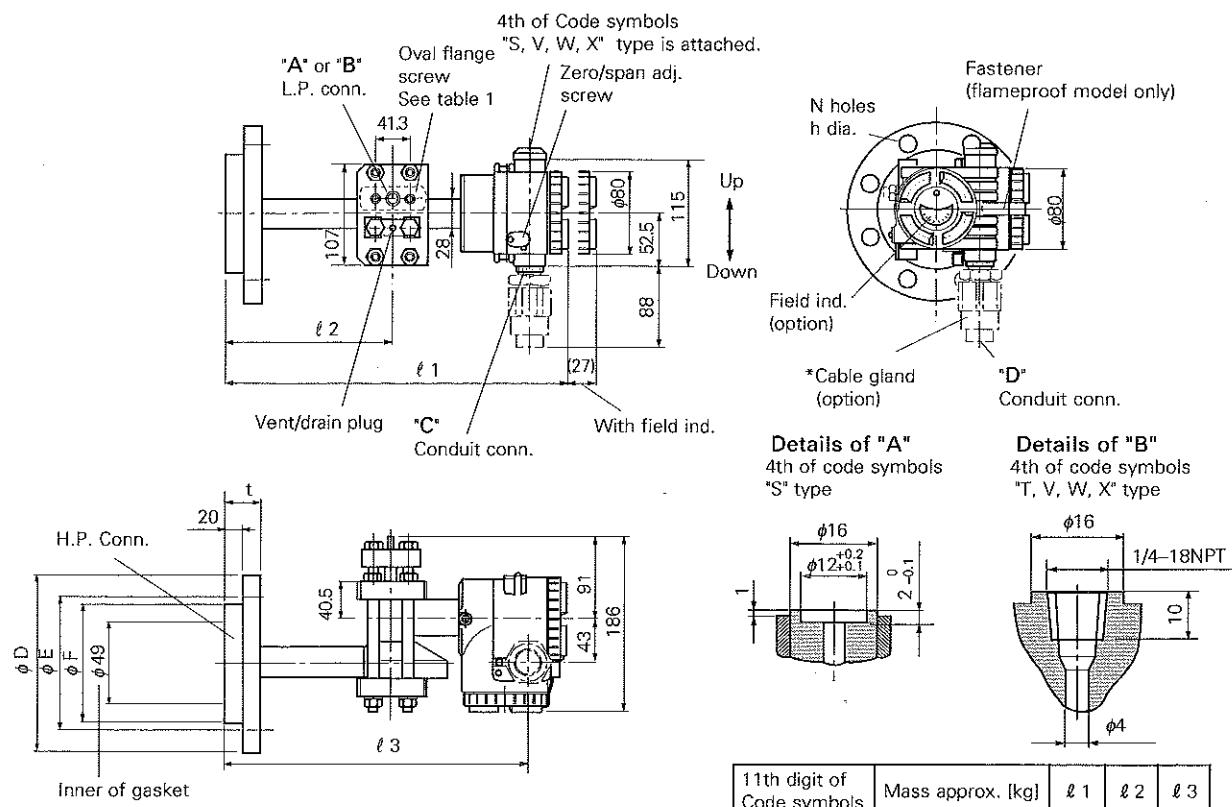


Details of "C"




Inner of gasket

Details of "D"



See table 1

## CONNECTION DIAGRAM



5th digit of Code symbols	φ D	φ E	t	N-φ h	Flange
0, G	140	105	36	4-19	JIS-10K-40A
1, H	155	120	36	4-19	JIS-10K-50A
2, J	140	105	38	4-19	JIS-20K-40A
3, K	155	120	38	8-19	JIS-20K-50A
4, L	160	120	42	4-23	JIS-30K-40A
5, M	165	130	42	8-19	JIS-30K-50A
A, Q	127	98.4	37.5	4-16	ANSI/JPI-150LB-1 1/2B
B, R	152	120.6	39.5	4-20	ANSI/JPI-150-2B
C, S	156	114.3	41	4-23	ANSI/JPI-300LB-1 1/2B
D, T	165	127	42.5	8-20	ANSI/JPI-300LB-2B

Note \* : Cable gland is supplied only for flameproof packing type.  
φ11 cable is suitable.

4th digit of Code symbols	Conduit conn.			Oval flange screw	Earth terminal
	J	K	M		
S	G1/2	17	8	Not attached	M4
T	1/2-14NPT	16	5	7/16-20UNF screw depth 13	No. 8-32UNC
V	Pg13.5	8	4.5	M10 screw depth 13	M4
W	M20x1.5	16	5	M10 screw depth 13	M4
X	Pg13.5	8	4.5	7/16-20UNF screw depth 13	M4

Table 1

F **H** Y **S**  
**K** **T** **V** **U** **B**  
**W** **L** **X** **2**

Fuji Electric Co.,Ltd.

## Head office

11-2 Osaki 1-chome, Shinagawa-ku, Tokyo, 141-0032 Japan  
 Phone: 81-3-5435-7111  
<http://www.fujielectric.co.jp/eng/sg/KEISOKU/welcome.htm>

Fuji Electric Instruments Co.,Ltd.

**Sales Div.**  
**International Sales Dept.**  
 No.1, Fuji-machi, Hino-city, Tokyo 191-8502 Japan  
 Phone: 81-42-585-6201, 6202  
 Fax: 81-42-585-6187, 6189