

## Metal Film Resistors

# Precision Type

## Normal & Miniature Style [ MFP Series ]



### INTRODUCTION

The MFP Series Metal Film Precision Resistors are manufactured using vacuum sputtering system to deposit multiple layers of mixed metals alloy and passivative materials onto a carefully treated high grade ceramic substrate. After a helical groove has been cut in the resistive layer, tinned connecting leads of electrolytic copper are welded to the end-caps. The resistors are coated with layers of blue color lacquer. Ultra high precision resistors, ultra high stability, ultra low temperature coefficient.


### FEATURES

Power Rating	1/6W, 1/4W, 0.4W, 1/2W, 0.6W, 1W, 2W, 3W
Resistance Tolerance	0.1%, $\pm 0.25\%$
T.C.R.	$\pm 15\text{ppm}/^\circ\text{C}$ , $\pm 25\text{ppm}/^\circ\text{C}$

### DERATING CURVE

For resistors operated in ambient temperatures above 70°C, power rating must be derated in accordance with the curve below.


Rated Load (%)

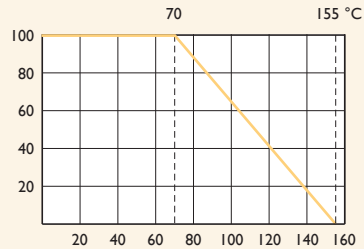

Ambient Temperature (°C)

### DIMENSIONS

Unit: mm

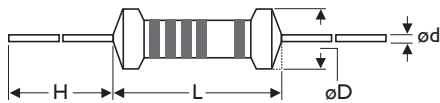

#### STYLE

#### DIMENSION

Normal	Miniature	L	øD	H	ød
MFP-12	MFP25S	3.4±0.3	1.9±0.2	28±2.0	0.45±0.05
MFP204	-	3.4±0.3	1.9±0.2	28±2.0	0.45±0.05
MFP-25	MFP50S	6.3±0.5	2.4±0.2	28±2.0	0.55±0.05
MFP207	-	6.3±0.5	2.4±0.2	28±2.0	0.55±0.05
MFP-50	MFPIWS	9.0±0.5	3.3±0.3	26±2.0	0.55±0.05
MFPI00	MFP2WS	11.5±1.0	4.5±0.5	35±2.0	0.8±0.05
MFP200	MFP3WS	15.5±1.0	5.0±0.5	33±2.0	0.8±0.05

Note:

## ELECTRICAL CHARACTERISTICS

STYLE	MFP-12	MFP25S	MFP204	MFP-25	MFP50S	MFP207	MFP-50	MFPIWS	MFPI00	MFP2WS	MFP200	MFP3WS
Power Rating at 70°C	1/6W	1/4W	0.4W	1/4W	1/2W	0.6W	1/2W	1W		2W		3W
Maximum Working Voltage	150V	200V		250V			350V	400V	500V			
Maximum Overload Voltage	300V	400V		500V	600V		700V	800V	1,000V			
Dielectric Withstanding Vol.	300V			500V				700V	1,000V			
Resistance Range	10 Ω - 1 M Ω for E192 series value											
Operating Temp. Range	-55°C to +155°C											
Temperature Coefficient	±15ppm/°C, ±25ppm/°C											

Note: Special value is available on request

## ENVIRONMENTAL CHARACTERISTICS

PERFORMANCE TEST	TEST METHOD		APPRAISE
Short Time Overload	JIS-C-5202 5.5	2.5 times RCWV for 5 Sec.	±0.1%+0.05 Ω
Dielectric Withstanding Voltage	JIS-C-5202 5.7	in V-Block for 60 Sec.	By type
Temperature Coefficient	JIS-C-5202 5.2	-55°C to +155°C	By type
Insulation Resistance	JIS-C-5202 5.6	in V-Block	>10,000M Ω
Solderability	JIS-C-5202 6.5	260±5°C for 5±0.5 Sec.	95% Min. coverage
Resistance to Solvent	JIS-C-5202 6.9	IPA for 1 Min. with ultrasonic	No deterioration of coatings and markings
Terminal Strength	JIS-C-5202 6.1	Direct load for 10 Sec. in the direction of the terminal leads	≥2.5kg (24.5N)
Pulse Overload	JIS-C-5202 5.8	4 times RCWV 10,000 cycles (1 Sec. on, 25 Sec. off)	±1.0%+0.05 Ω
Load Life in Humidity	JIS-C-5202 7.9	40±2°C, 90-95% RH at RCWV for 1,000 Hr. (1.5 Hr. on, 0.5 Hr. off)	±1.0%+0.05 Ω
Load Life	JIS-C-5202 7.10	70°C at RCWV for 1,000 Hr. (1.5 Hr. on, 0.5 Hr. off)	±1.0%+0.05 Ω
Temperature Cycling	JIS-C-5202 7.4	-55°C ⇄ Room Temp. ⇄ +155°C ⇄ Room Temp. (5 cycles)	±0.25%+0.05 Ω
Resistance to Soldering Heat	JIS-C-5202 6.4	350±10°C for 3±0.5 Sec.	±0.25%+0.05 Ω

Note: Rated Continuous Working Voltage (RCWV) =  $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$