




This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

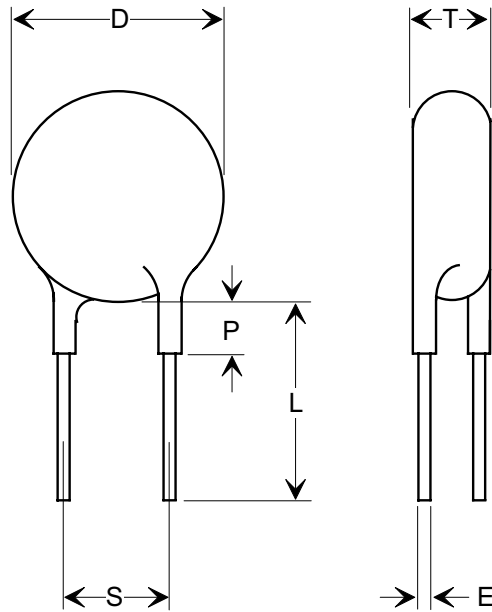

SPECIFICATIONS

TUSONIX STYLE:	838-588
D (DIAMETER):	.290 [7.37] MAX.
T (THICKNESS):	.156 [3.96] MAX.
S (LEAD WIRE SPACING):	.250 ± 0.031 [6.35 ± 0.79]
L (LEAD WIRE LENGTH):	1.25 [31.75] MIN.
E (LEAD WIRE DIAMETER):	.025 [0.63] (22 AWG.)
P (COATING ON LEADS MAX.):	.031 [0.79]
CAPACITANCE VALUE:	390 pF
CAPACITANCE TOLERANCE:	± 20 %
TEMPERATURE COEFFICIENT:	X5E
WORKING VOLTAGE:	1000 VDC

NOTES:

- TUSONIX PART NUMBER: 838-588-X5E0-391M. TUSONIX RoHS COMPLIANT PART NUMBER: 838-588-X5E0-391M LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- LEAD FINISH: STANDARD PART #: 60/40 SOLDER PLATED. RoHS PART #: 100% TIN PLATED.
- STANDARD PART: WHITE INK. RoHS PART: WHITE INK AND GREEN STRIPE IDENTIFIER.
- CONFORMAL COATING IS PHENOLIC RESIN (DUREZ) WITH WAX IMPREGNATION.
- TESTED PER MIL-C-11015, CK60 GROUPA.

MARKING: TMK, CAP, TOL., WVDC & DATE CODE

REVISION RECORD Original Release C.O. WAS SK 8188-780. S.M. 01-19-07 20070118-3-02 0	--TOLERANCES-- Unless Otherwise Specified		Title HI-VOLTAGE DISC CAPACITOR	
	DECIMAL ±		Drawn S.M. 01-10-07 Scale NONE	
	ANGLES ±		Approved R.L. 01-10-07	
	TUSONIX TUCSON, ARIZONA		A 838-588-X5E0-391M	