


### 2.0A Fast Recovery Rectifier

#### Features

- Low forward voltage drop at 2A
- High current capability
- High reliability
- High forward surge current capability
- High temperature soldering guaranteed: 250°C/10 seconds  
.0375" (9.5mm) lead length, 5lbs (2.3kg) tension
- RoHS Compliance

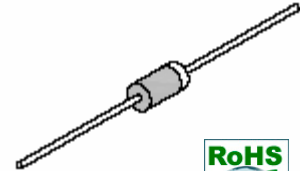

DO-15



#### Mechanical Data

<b>Case:</b>	DO-15, molded plastic
<b>Epoxy:</b>	UL 94V-0 rate flame retardant
<b>Terminals:</b>	Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
<b>Polarity:</b>	Color band denotes cathode end
<b>Weight:</b>	0.40 gram

#### Maximum Ratings and Electrical Characteristics ( $T_A=25^{\circ}\text{C}$ unless noted otherwise)

Symbol	Description	TF 201	TF 202	TF 203	TF 204	TF 205	TF 206	TF 207	Unit	Conditions
		FR 201	FR 202	FR 203	FR 204	FR 205	FR 206	FR 207		
<b>V<sub>RRM</sub></b>	Maximum Repetitive Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
<b>V<sub>RMS</sub></b>	Maximum RMS Voltage	35	70	140	280	420	560	700	V	
<b>V<sub>DC</sub></b>	Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
<b>I<sub>AV</sub></b>	Maximum Average Forward Rectified Current	2.0							A	T <sub>a</sub> =55 °C
<b>I<sub>FSM</sub></b>	Peak Forward Surge Current	60							A	8.3ms single half sine-wave superimposed on rated load (JEDEC Method)

## 2.0A Fast Recovery Rectifier

### TF201 - TF207/FR201 -FR207

Symbol	Description	TF 201	TF 202	TF 203	TF 204	TF 205	TF 206	TF 207	Unit	Conditions
		FR 201	FR 202	FR 203	FR 204	FR 205	FR 206	FR 207		
<b>V<sub>F</sub></b>	Maximum Instantaneous Forward Voltage	1.3							V	IF= 2.0 A
<b>I<sub>R</sub></b>	Maximum DC Reverse Current at Rated DC Blocking Voltage	5.0							μA	TA=25° C
		100								TA=100° C
<b>T<sub>rr</sub></b>	Typical Reverse Recovery Time	150			250	500		nS	IF=0.5A, IR=1A, Irr=0.25A	
<b>C<sub>J</sub></b>	Typical Junction Capacitance	30							pF	VR=4V, f=1MHz
<b>T<sub>J</sub></b>	Operating Temperature range	-55 to +125							° C	
<b>T<sub>STG</sub></b>	Storage Temperature Range	-55 to +150								

### Typical Characteristics Curves

Fig.1-Max. Forward Current Derating Curve


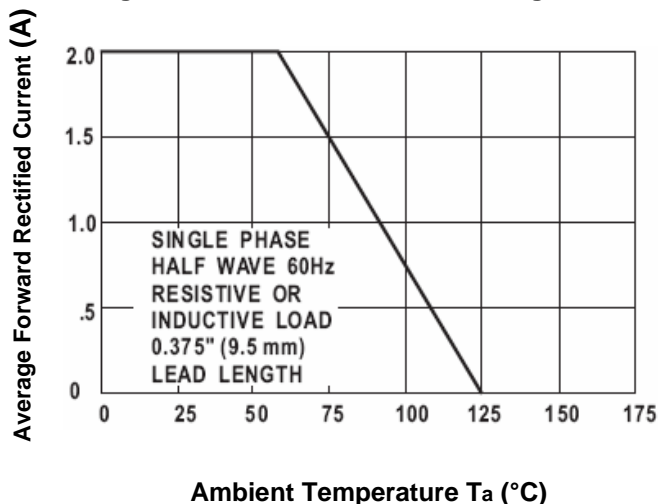


Fig.2-Max. Non-Repetitive Forward Surge Current

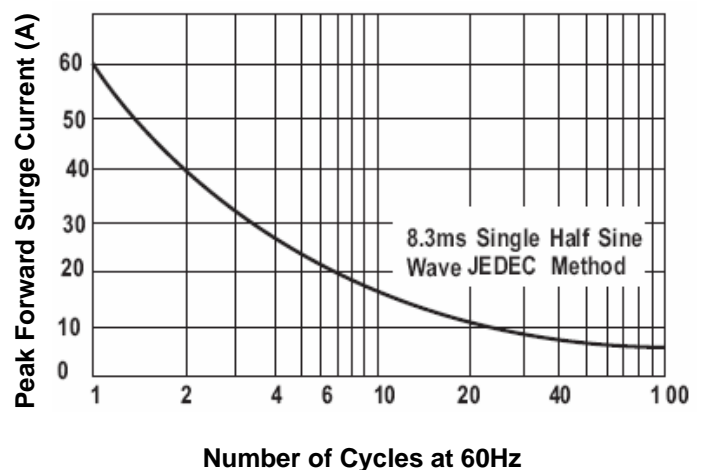

# 2.0A Fast Recovery Rectifier

## TF201 - TF207/FR201 -FR207

Fig.3- Typical Forward Characteristics



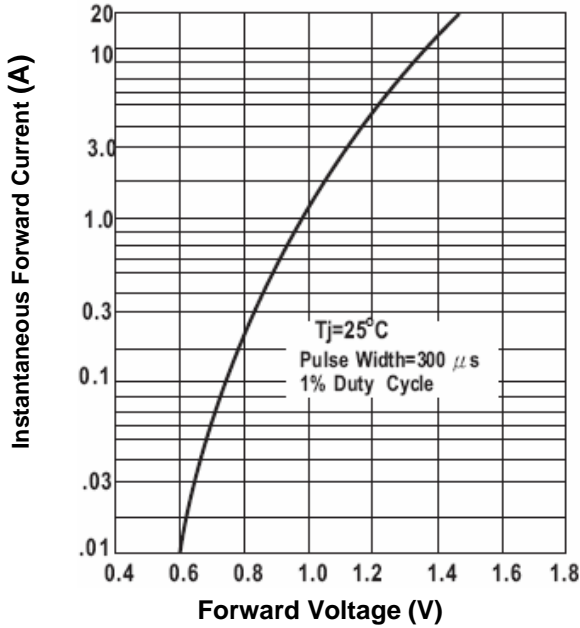


Fig.4- Typical Junction Capacitance

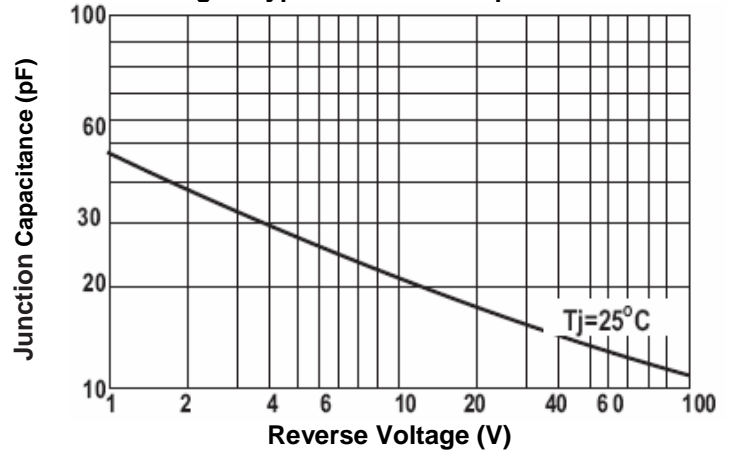

### Dimensions in inches (mm)

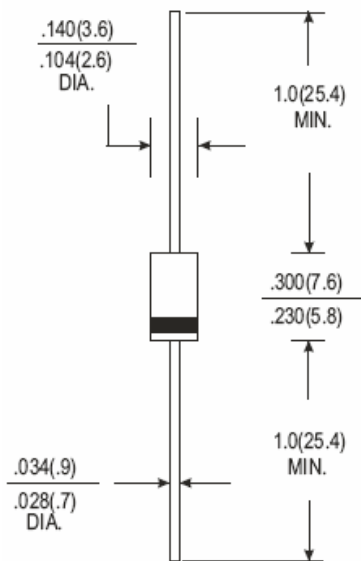

DO-15



Rev. B/AH 2008-04-29

## 2.0A Fast Recovery Rectifier

TF201 - TF207/FR201 -FR207

### How to contact us:

#### **US HEADQUARTERS**

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 824-8766 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: [taitron@taitroncomponents.com](mailto:taitron@taitroncomponents.com)

Http://[www.taitroncomponents.com](http://www.taitroncomponents.com)

#### **TAITRON COMPONENTS MEXICO, S.A .DE C.V.**

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.  
42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

#### **TAITRON COMPONETS INCORPORATED E REPRESENTAÇÕES DO BRASIL LTDA**

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

#### **TAITRON COMPONETS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE**

METROBANK PLAZA, 1160 WEST YAN' AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931