


Recommended P.C.B Layout(Component Side)

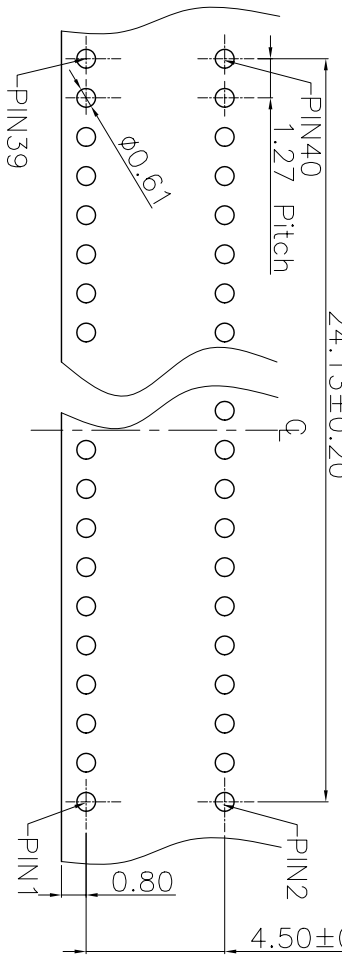

- NOTE:
127123FR040S □09ZL
- 1>Selective plating
S1-05u"Min.Gold in contact area/
100u"Min.Tin in solder area.
*S2-Gold in contact area/
100u"Min.Tin in solder area.
S3-10u"Min.Gold in contact area/
100u"Min.Tin in solder area.
S4-15u"Min.Gold in contact area/
100u"Min.Tin in solder area.
S5-30u"Min.Gold in contact area/
100u"Min.Tin in solder area.
S6-50u"Min.Gold in contact area/
100u"Min.Tin in solder area.

2	Terminal	Pho.Bronze	—	Selective Gold/Tin
1	Housing	High Temp	Black	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

SUWIN
CONNECTOR

CUSTOMER COPY TITLE:1.27mm Female R/A Dip Type

PART NO. 127123FR040SX09ZL

PART NO. (OLD)

DRAWING NO. 127123FR040SX09ZL

SCALE 4:1 UNIT mm A4

ECN (DCN) NO.	REV	DATE	DESCRIPTION	CHANGE APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO.
	0		NEW		Angle 30 ~ ±2° 10 ~ 30 ±0.50 ~ 10 ±0.15	DRAW DESIGN CHECK APPRO.