


RoHS Compliant Product

A suffix of "C" specifies halogen free




FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 1.93 grams (approximate)

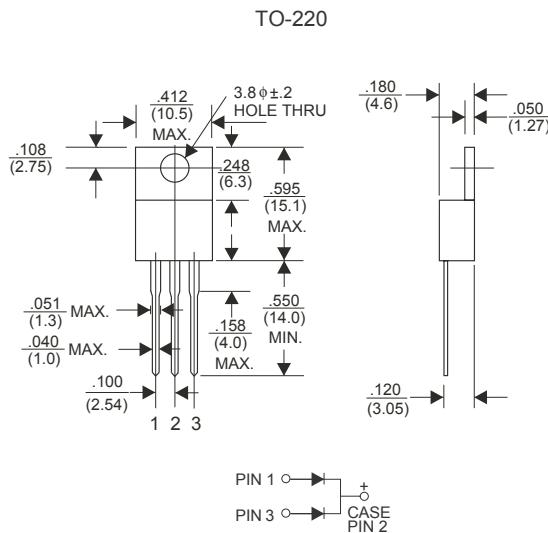

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.

Single phase half wave, 60Hz, resistive or inductive load.

For capacitive load, de-rate current by 20%.

TYPE NUMBER	SYMBOL	SBR10100	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	100	V
Working Peak Reverse Voltage	V_{RSM}	100	V
Maximum DC Blocking Voltage	V_{DC}	100	V
Maximum Average Forward Rectified Current Per Leg	I_F	5	A
Per Device		10	
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	130	A
Maximum Instantaneous Forward Voltage $I_F = 5 \text{ A}, T_A = 25^\circ\text{C}$, per leg	V_F	0.82	V
$I_F = 5 \text{ A}, T_A = 125^\circ\text{C}$, per leg		0.70	
Maximum DC Reverse Current $T_A = 25^\circ\text{C}$	I_R	0.05	mA
at Rated DC Blocking Voltage $T_A = 100^\circ\text{C}$		10	
Typical Junction Capacitance (Note 1)	C_J	350	pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	2.5	°C /W
	dv / dt	10000	V / μs
Operating Temperature Range T_J	T_J	-50 ~ +150	°C
Storage Temperature Range T_{STG}	T_{STG}	-65 ~ +175	°C

NOTES:

1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Thermal Resistance Junction to Case.

RATINGS AND CHARACTERISTIC CURVES (SBR10100)

