



TAYCHIPST FAST RECOVERY RECTIFIER

ERB43-02 THRU ERB43-04

200V-400V 0.5A

FEATURES

- Low cost
- Diffused junction
- Low leakage
- Low forward voltage drop
- High current capability
- Easily cleaned with Freon, Alcohol, Isopropanol
- and similar solvents
- The plastic material carries U/L recognition 94V-0

MECHANICAL DATA


Case: JEDEC DO-41, molded plastic

Terminals: Axial lead, solderable per
MIL-STD-202, Method 208

Polarity: Color band denotes cathode

Weight: 0.012 ounces, 0.34 grams

Mounting position: Any

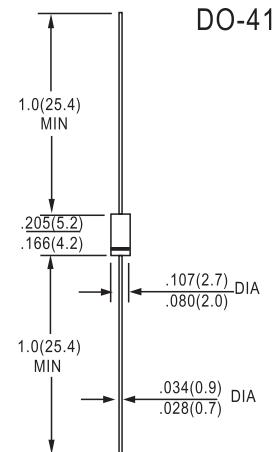

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		ERB43-02	ERB43-04	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	200	400	V
Maximum RMS voltage	V _{RMS}	140	280	V
Maximum DC blocking voltage	V _{DC}	200	400	V
Maximum average forward rectified current 9.5mm lead length, @ T _A =75°C	I _{F(AV)}	0.5		A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ T _J =125°C	I _{FSM}	20.0		A
Maximum instantaneous forward voltage @ 0.5 A	V _F	1.2		V
Maximum reverse current @ T _A =25°C at rated DC blocking voltage @ T _A =100°C	I _R	5.0 100.0		µ A
Maximum reverse recovery time (Note1)	t _{rr}	400		ns
Typical junction capacitance (Note2)	C _J	12		pF
Typical thermal resistance (Note3)	R _{θJA}	55		°C/W
Operating junction temperature range	T _J	-55----+150		°C
Storage temperature range	T _{STG}	-55----+150		°C

NOTE:1. Measured with I_F=0.5A, I_R=1A, I_{rr}=0.25A.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.



TAYCHIPST


FAST RECOVERY RECTIFIER

ERB43-02 THRU ERB43-04

200V-400V 0.5A

RATINGS AND CHARACTERISTIC CURVES ERB43-02 THRU ERB43-04

FIG.1 – REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

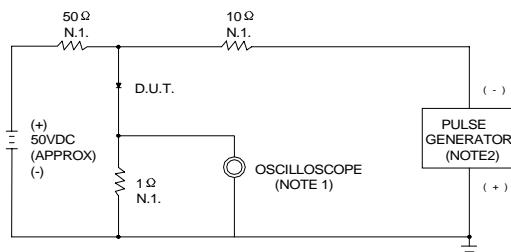

NOTES: 1. RISE TIME = 7ns MAX INPUT IMPEDANCE = 1MΩ, 22pF
2. RISE TIME = 10ns MAX SOURCE IMPEDANCE = 50Ω


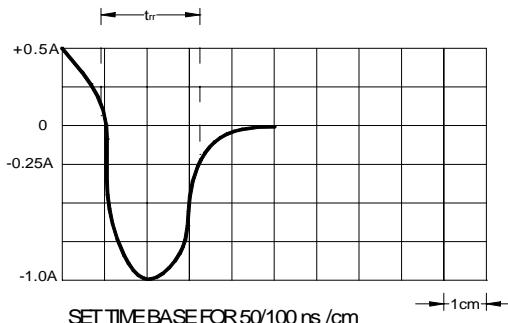


FIG.2 – TYPICAL FORWARD CHARACTERISTIC

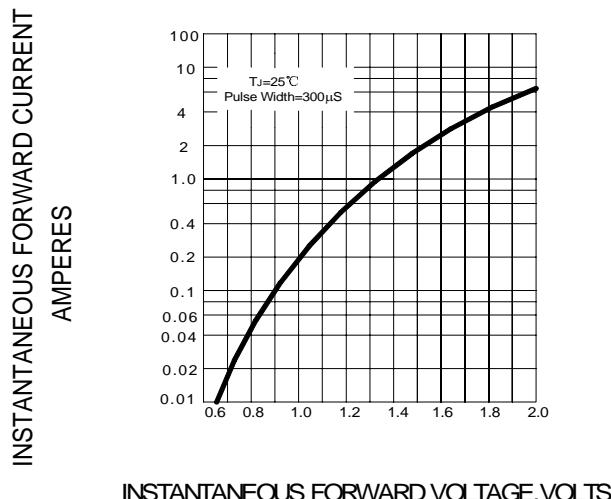

AVERAGE FORWARD RECTIFIED CURRENT AMPERES

FIG.3 – FORWARD DERATING CURVE


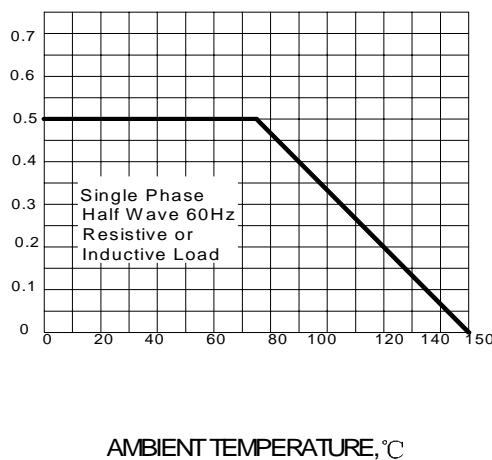


FIG.4 – TYPICAL JUNCTION CAPACITANCE



PEAK FORWARD SURGE CURRENT AMPERES

FIG.5 – PEAK FORWARD SURGE CURRENT

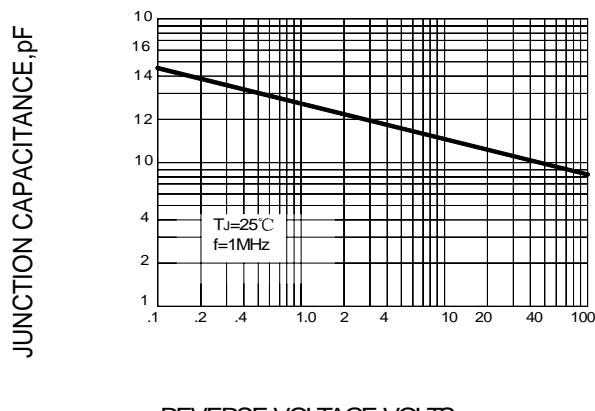