

# Type 3SB/3SBP Slow Blow Glass Tube Fuse Series

## Electrical Characteristics

Rating	Blow Time
110%	4 hours, minimum
135%	1 hour, maximum
200%	5 seconds, minimum
200%	30 seconds, maximum

## Mechanical Dimensions

	3SB		3SBP		Pigtail Leads	
Dimensions	Inches	(mm)	Inches	(mm)	Inches	(mm)
Diameter	0.250	(6.35)	0.270	(6.9)	0.032	(0.813)
Length	1.25	(31.8)	1.28	(32.5)	1.5	(38.1)

Listed by Underwriters' Laboratories through 8 amperes. Certified by Canadian Standards Association through 8 amperes.


Type 3SB fuses, described as slow blow, are designed to prevent unnecessary blowing in circuits where transient surges are anticipated. Protection against short circuit or continued overload is still maintained. Pigtail leads (Type 3SBP) are available when direct soldering into circuits is desired.

Cartridge fuses can be provided pre-assembled in clips, see page 40.

Pigtail fuses can be provided:

1. In Bulk.
2. On Axial Tape & Reel.
3. Radial Formed & Cut.
4. With Heat Shrink Tubing over body.

See Page 41 for details.

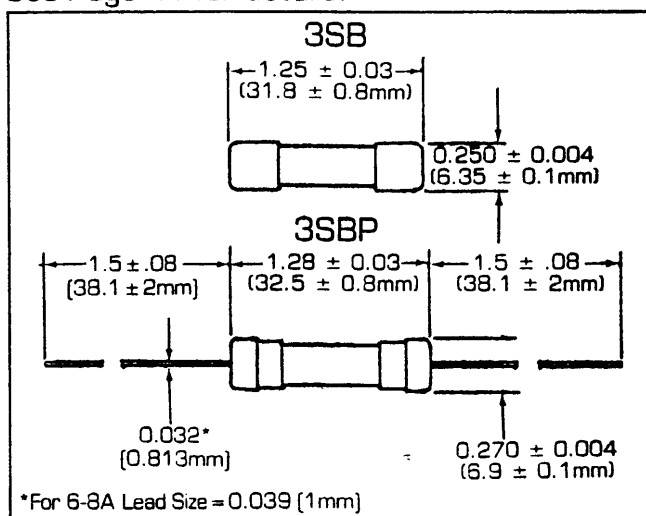

\*For 6-8A Lead Size = 0.039 (1 mm)

Specifications Subject To Change Without Notice

**bel** Bel Fuse Inc.

14 198 Van Vorst Street, Jersey City, New Jersey 07302 • (201) 432-0463 • FAX (201) 432-9542

Catalog Number	Ampere Rating	Voltage Rating
3SB062	1/16	250
3SB100	1/10	250
3SB125	1/8	250
3SB150	15/100	250
3SB175	.175	250
3SB187	3/16	250
3SB200	2/10	250
3SB250	1/4	250
3SB300	3/10	250
3SB375	3/8	250
3SB400	4/10	250
3SB500	1/2	250
3SB600	6/10	250
3SB700	7/10	250
3SB750	3/4	250
3SB800	8/10	250
3SB1	1	250
3SB1.2	1-2/10	250
3SB1.25	1-1/4	250
3SB1.5	1-1/2	250
3SB1.6	1-6/10	250
3SB1.8	1-8/10	250
3SB2	2	250
3SB2.25	2-1/4	250
3SB2.5	2-1/2	250
3SB2.8	2-8/10	250
3SB3	3	250
3SB3.2	3-2/10	250
3SB3.5	3-1/2	250
3SB4	4	250
3SB4.5	4-1/2	250
3SB5	5	250
3SBP6	6	250
3SB7	7	250
3SB8	8	250


## Fuse Markings

"BEL,"  

Current Rating, "250V"

Bel 3SB/3SBP

Time-Current Characteristics Curve

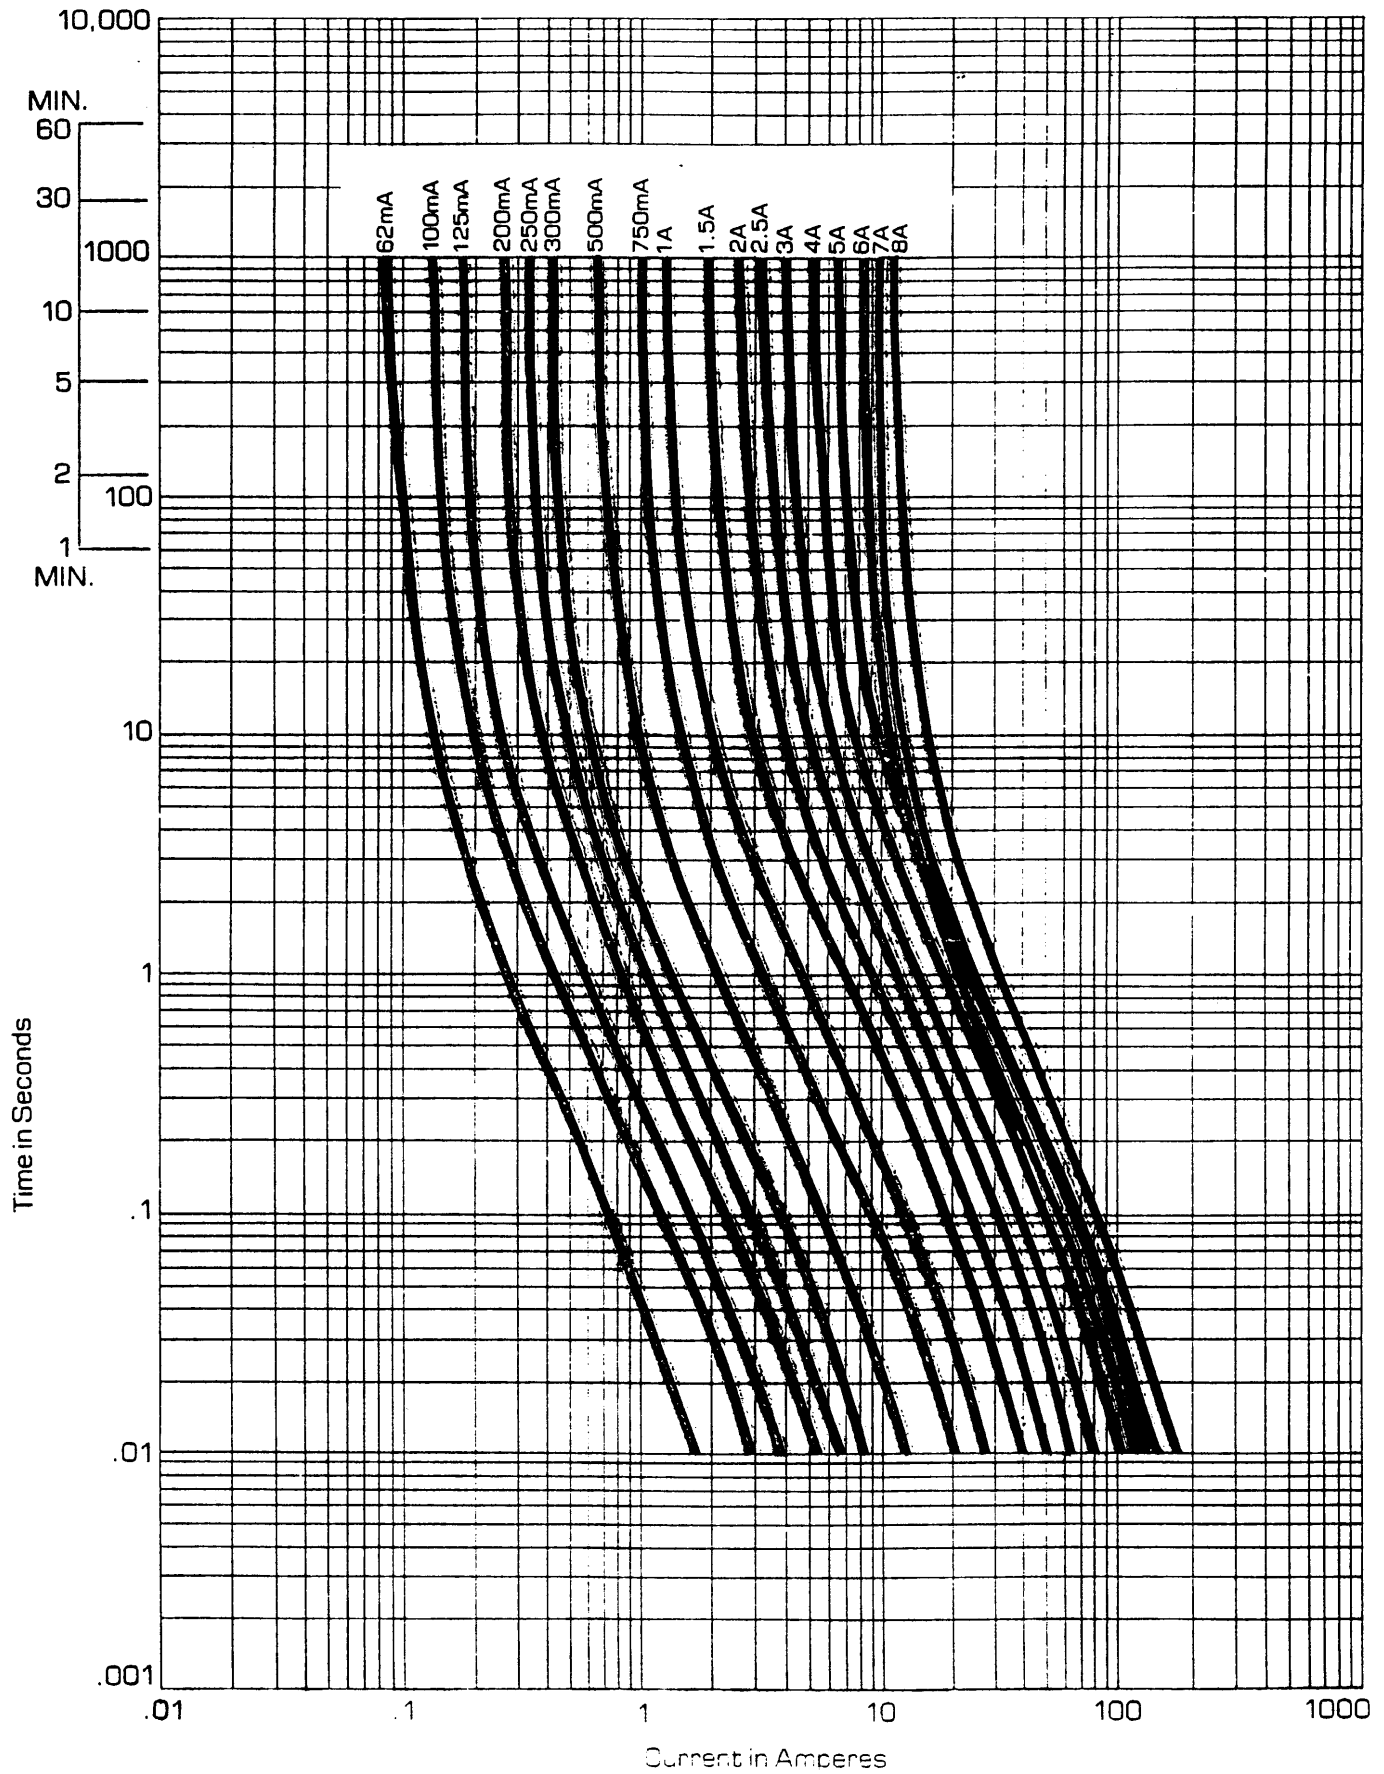

**Bel Fuse Inc.**

198 Van Vorst Street, Jersey City, New Jersey 07310 • Tel: (201) 486-1000 • Fax: (201) 486-1842

Specifications Subject To Change Without Notice