



1. Dimensions:

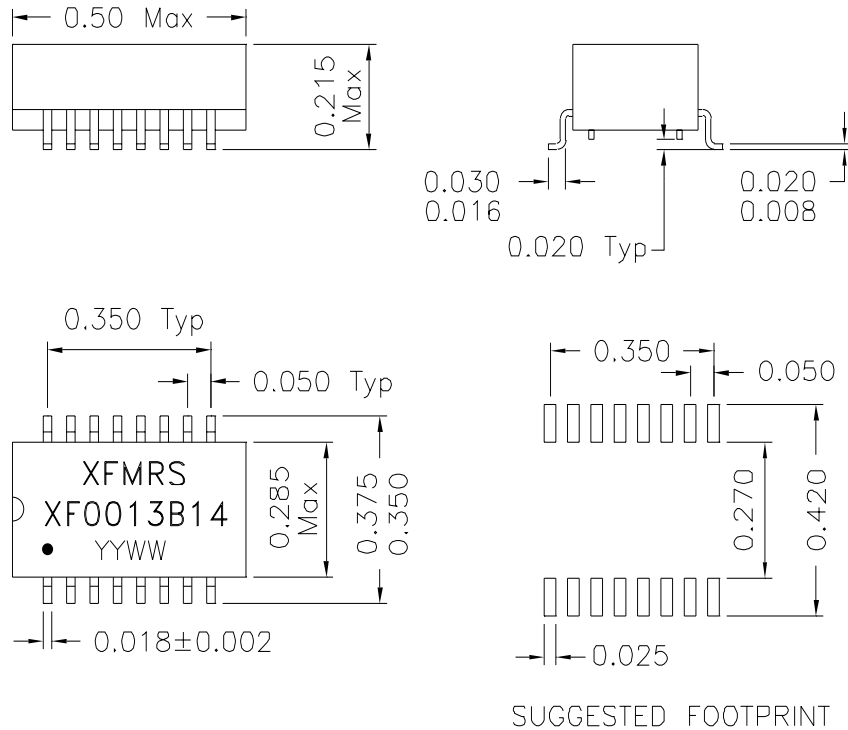

2. Schematic:

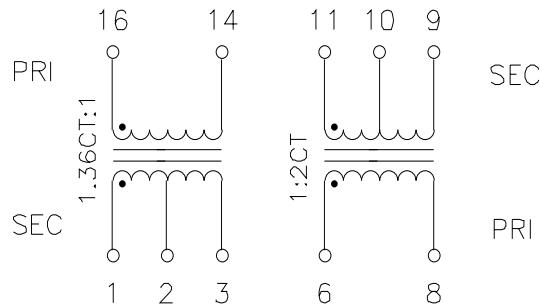

3. Electrical Specifications: @25°C

Isolation Voltage: 1500 Vrms

Turns Ratio: (16-14):(1-2-3)=1:1.36CT ±3%

(6-8):(11-10-9)=1:2CT ±3%

PRI OCL: 1.5mH MIN. @100KHz 50mV

Cw/w: Pins 1-16 35pF MAX. @100KHz 50mV

Cw/w: Pins 8-9 40pF MAX. @100KHz 50mV

PRI LL: 0.5uH MAX. @100KHz 50mV (SEC Shorted)

PRI DC Resistance: 0.9 Ohms MAX.

SEC DC Resistance: 1.30 Ohms MAX.

DOC. REV: A/2

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION

XFMRS Inc	Title: TRANSFORMER	
	UNLESS OTHERWISE SPECIFIED	P/N: XF0013B14
	TOLERANCES: .xxx ±0.010	REV. A
	Dimensions in Inch	DWN. 李清儿 Nov-11-99
SCALE 2.5:1 SHT 1 OF 1	CHK. 孙怡 Nov-11-99	
	APP. Joe Huff	Nov-11-99