

SKR 15,2 Qu bond



DIODE

$$I_{F(DC)} = 330 \text{ A}$$

$$V_{RRM} = 1600 \text{ V}$$

Size: 15,2 mm x 15,2 mm

SKR 15,2 Qu bond

Features

- high current density due to mesa technology
- high surge current
- compatible to thick wire bonding
- compatible to all standard solder processes

Typical Applications*


- uncontrolled rectifier bridges

Absolute Maximum Ratings			
Symbol	Conditions	Values	Unit
V_{RRM}	$T_j = 25 \text{ }^\circ\text{C}$, $I_R = 1 \text{ mA}$	1600	V
$I_{F(AV)}$	$T_c = 80 \text{ }^\circ\text{C}$, $T_j = 150 \text{ }^\circ\text{C}$	270	A
i^2t	$T_j = 150 \text{ }^\circ\text{C}$, 10 ms, sin 180°	72200	A ² s
I_{FSM}	10 ms	$T_j = 25 \text{ }^\circ\text{C}$	5000
	sin 180°	$T_j = 150 \text{ }^\circ\text{C}$	3800
T_{jmax}		150	°C

Electrical Characteristics					
Symbol	Conditions	min.	typ.	max.	Unit
I_R	$T_j = 25 \text{ }^\circ\text{C}$, V_{RRM}			1	mA
	$T_j = 120 \text{ }^\circ\text{C}$, V_{RRM}			2.2	mA
V_F	$T_j = 25 \text{ }^\circ\text{C}$, $I_F = 245 \text{ A}$		1	1.21	V
	$T_j = 125 \text{ }^\circ\text{C}$, $I_F = 245 \text{ A}$		0.9	1.1	V
$V_{(TO)}$	$T_j = 125 \text{ }^\circ\text{C}$			0.83	V
r_T	$T_j = 125 \text{ }^\circ\text{C}$			0.7	mΩ
t_{rr}	$T_j = 25 \text{ }^\circ\text{C}$, ± 1 A		42		μs

Thermal Characteristics					
Symbol	Conditions	min.	typ.	max.	Unit
T_j		-40		150	°C
T_{stg}		-40		150	°C
T_{solder}	10 min.			250	°C
T_{solder}	5 min.			320	°C
$R_{th(j-c)}$	Semipack 2 assembly		0.2		K/W


Mechanical Characteristics			
Symbol	Conditions	Values	Unit
Raster size		15.2 x 15.2	mm ²
Area total		231.04	mm ²
Anode		bondable (Al)	
Cathode		solderable (Ag/Ni)	
Wire bond		Al, diameter ≤ 500 μm	
Package		tray	
Chips / Package		25	pcs

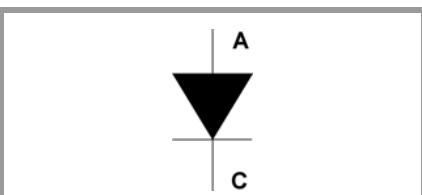

SKR

0,31

Al-contact bondable



Ag/Ni-contact solderable

R0,80

R0,80

Al-contact bondable

□ 13,90

□ 14,40

□ 15,20 (raster size)

die size after cutting
□ 15,17 mm ±0.01mm

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.