



- Cw/w: 50PF Typ @ 100KHz, 0.2V
- LL: 0.5μH Max @ 100KHz, 0.2V
- DCR: 0.7Ω Max
- Operating Temp: 0°C to 70°C

Electrical Specifications @ 25°C


Part Number	OCL(μH Min) @ 100kHz, 200mV With 8mA DC Bias	Turns Ratio chip: cable (±5%)	Return Loss (dB Min)			
			0.3-30MHz	40MHz	50MHz	60-80MHz
AHTA-1621S	350	1CT:1CT(TX)/1CT:1CT(RX)	-18	-16	-14.5	-12

Electrical Specifications @ 25°C

Part Number	Insertion Loss (dB Max)	Cross Talk (dB Min)		Isolation HI-POT (Vrms)
		0.3-100MHz	0.3-30MHz	
AHTA-1621S	-1.1	-42	-35	1500

All specifications subject to change without notice.

MECHANICAL

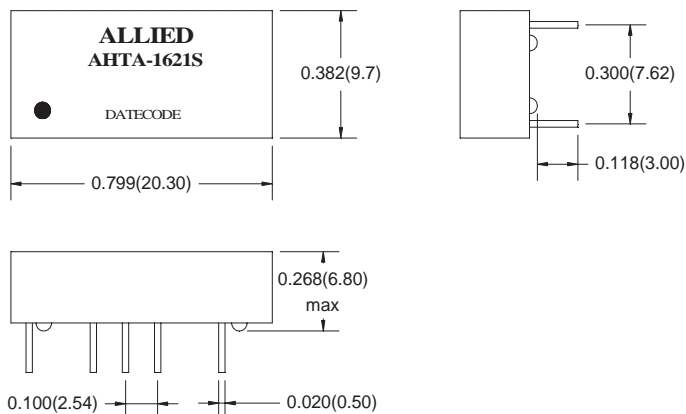

Dimensions:mm(inch)
Unless otherwise specified, all tolerances are ±0.010(0.25)

SCHEMATICS

