



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 932 MHz SMD 3.0x3.0 mm

TST Part No.: TA1148A

Customer Part No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ David Chang 張明智

Approved by: _____ Francis Chen 張明智

Date: _____ 2010/01/08

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 932 MHz

MODEL NO.: TA1148A

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 16 dBm
2. DC Voltage : 3 V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C


RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:


Item	Unit	Min.	Type.	Max.
Center frequency Fc	MHz	-	932	-
Insertion Loss (930~934 MHz) IL	dB	-	2.6	3.2
Amplitude Ripple (930~934 MHz)	dB	-	0.5	2.5
VSWR (930~934 MHz)	dB	-	1.7	2.2
Attenuation (Reference level from 0 dB)				
10 ~ 880 MHz	dB	35	53	-
880 ~ 910 MHz	dB	35	52	-
910 ~ 915 MHz	dB	17	27	-
947 ~ 955 MHz	dB	15	24	-
955 ~ 960 MHz	dB	30	38	-
960 ~ 2500 MHz	dB	25	31	-

C. MEASUREMENT CIRCUIT:

HP Network analyzer

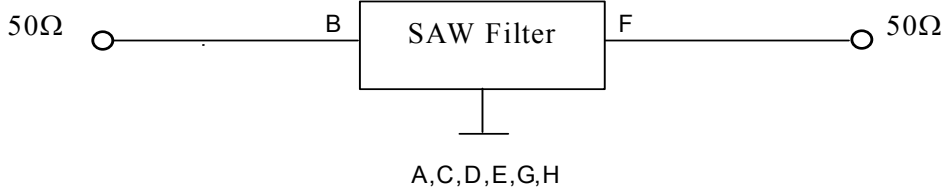


D.OUTLINE DRAWING:


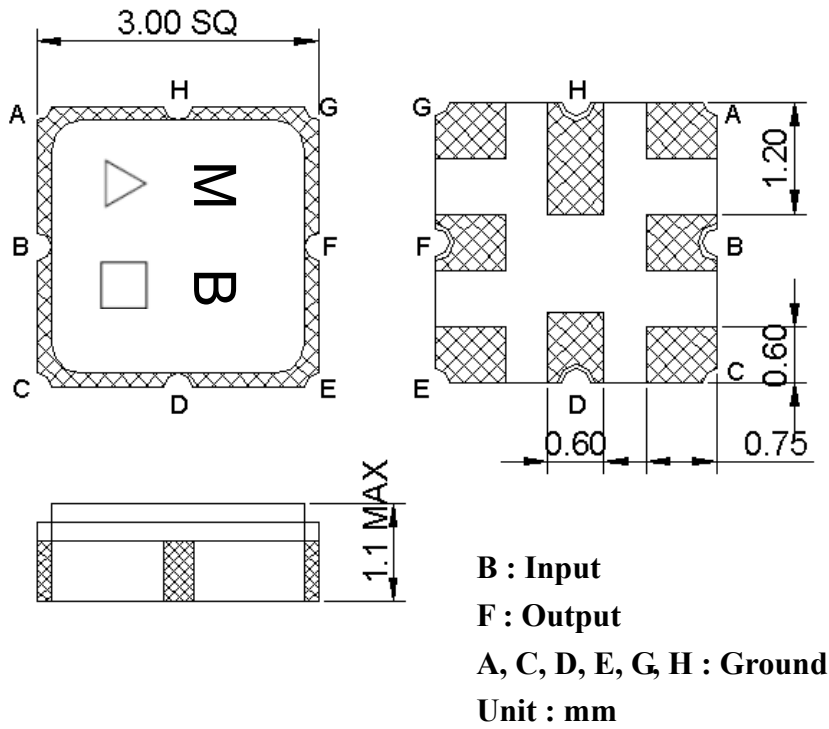



- △ : Year Code (2006->6, ..., 2009->9)
- : Date Code (W01->A,W02->B,...W27->a,...,W52->z)

E. PCB Footprint:

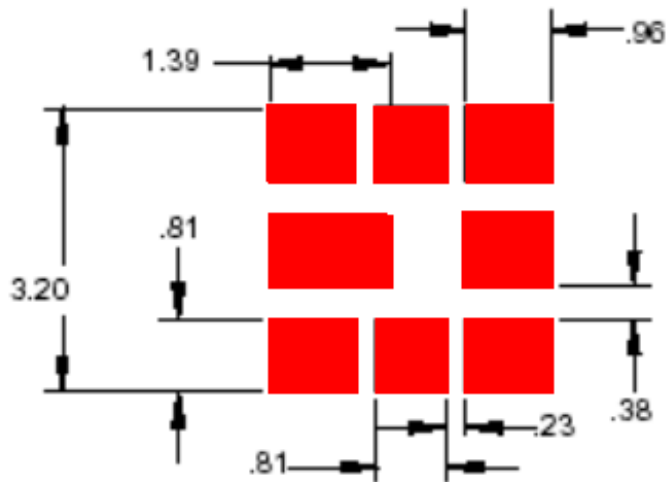


F. Frequency Characteristics :

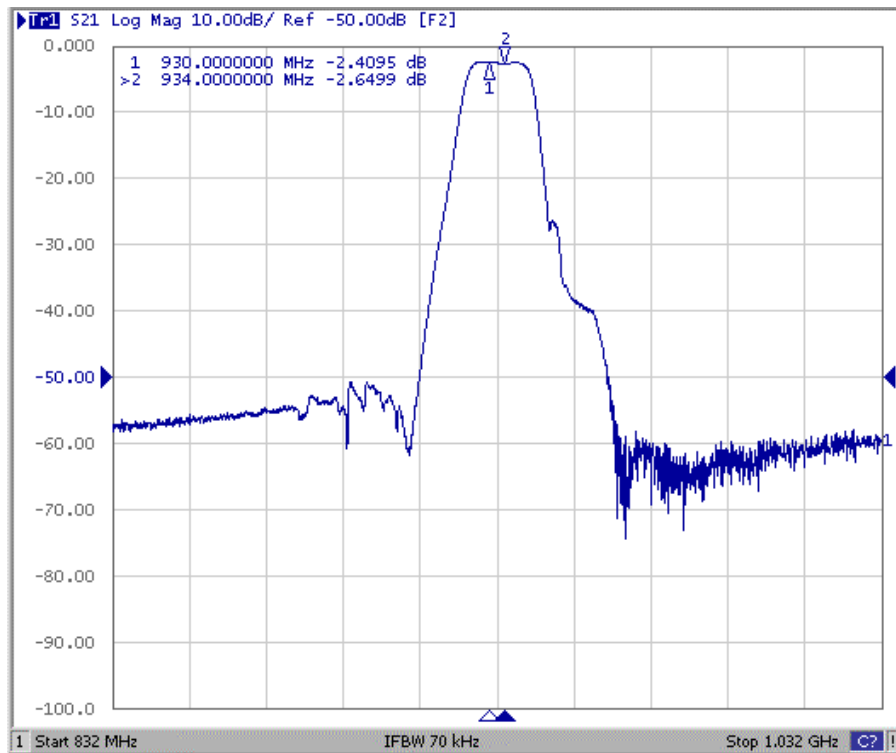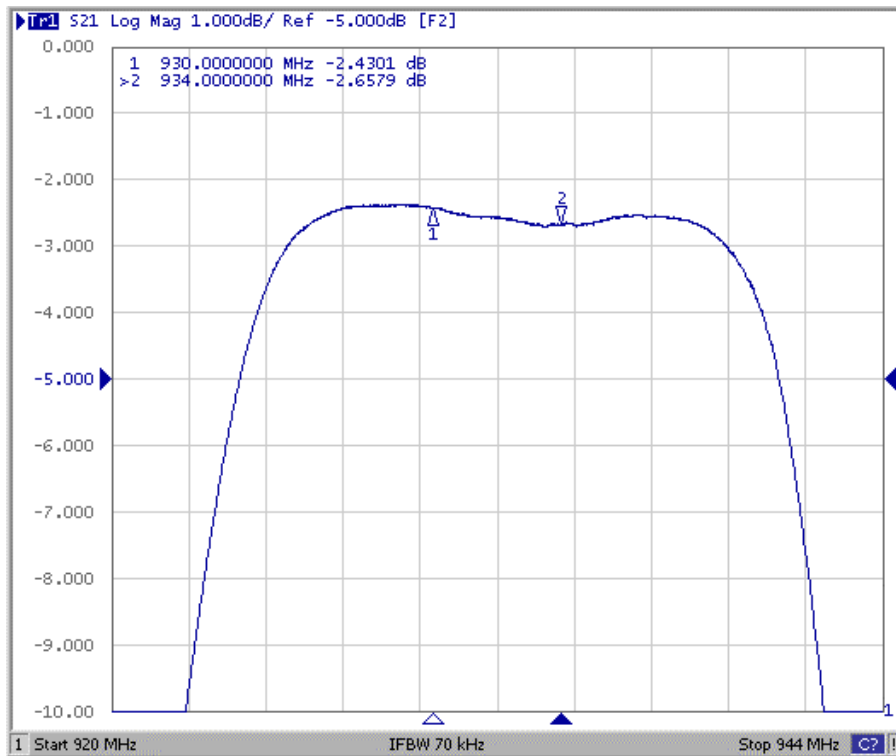

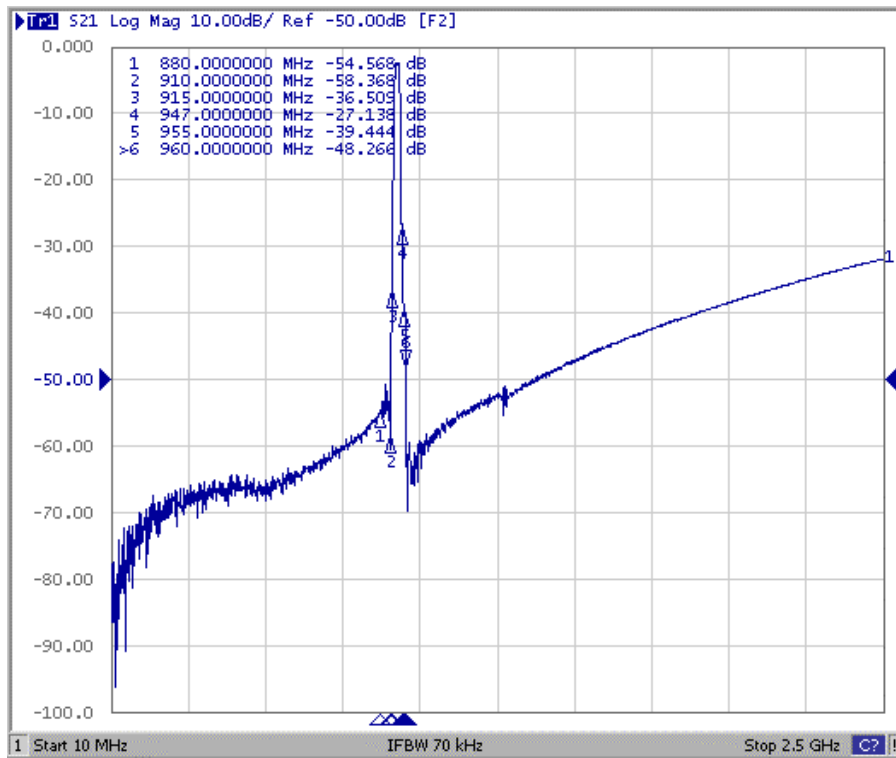


G. PACKING:

1. REEL DIMENSION

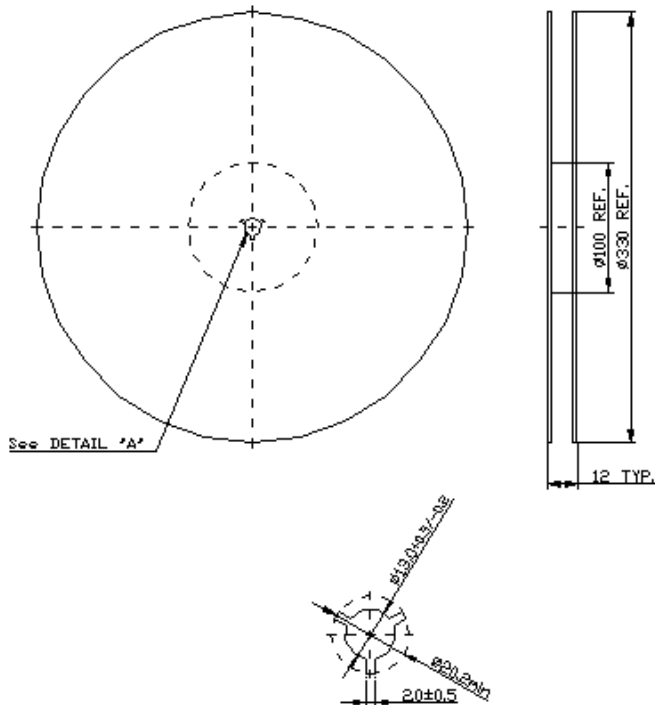

2. TAPE DIMENSION

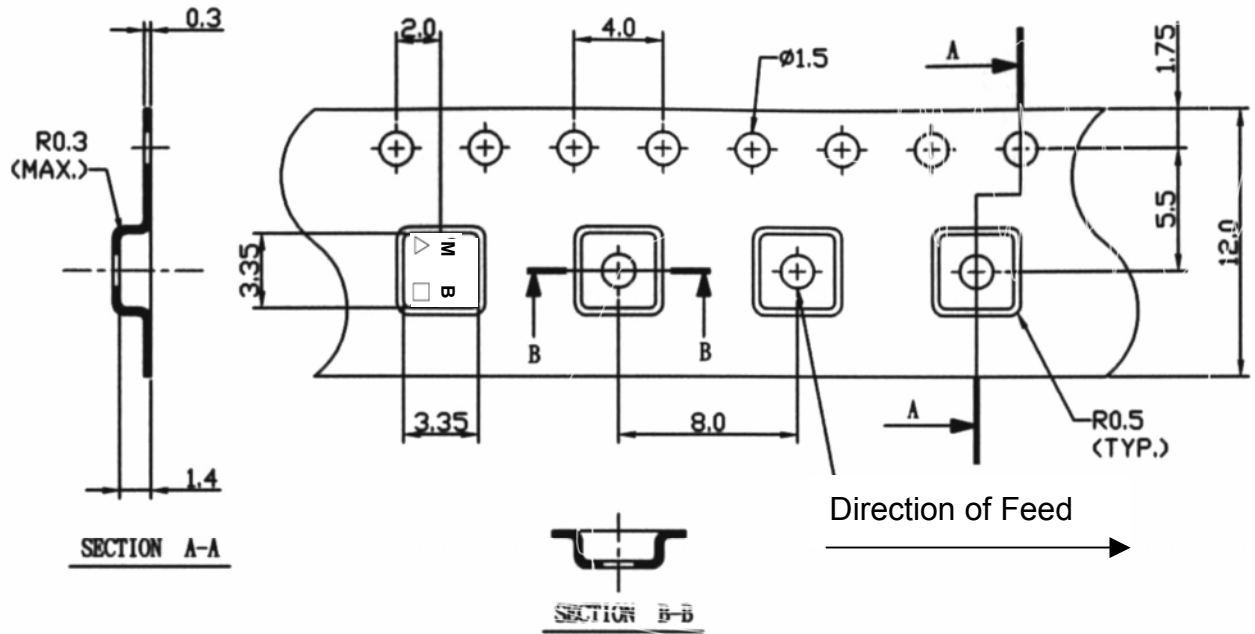

H. RECOMMENDED REFLOW PROFILE :

