


LOW NOISE AUDIO AMPLIFIER

DESCRIPTION


The BCY79 is a silicon Planar Epitaxial PNP transistor in Jedec TO-18 metal case. It is intended for use in audio input stages, driver stages and low-noise input stages.

The NPN complementary type is BCY59.



TO-18

INTERNAL SCHEMATIC DIAGRAM



SC08810

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CES}	Collector-Emitter Voltage ($V_{BE} = 0$)	-45	V
V_{CEO}	Collector-Emitter Voltage ($I_B = 0$)	-45	V
V_{EBO}	Emitter-Base Voltage ($I_C = 0$)	-5	V
I_C	Collector Current	-200	mA
I_B	Base Current	-20	mA
P_{tot}	Total Dissipation at $T_{amb} \leq 25\text{ }^\circ\text{C}$ at $T_C \leq 25\text{ }^\circ\text{C}$	390 1	mW W
T_{stg}	Storage Temperature	-55 to 175	$^\circ\text{C}$
T_j	Max. Operating Junction Temperature	175	$^\circ\text{C}$

THERMAL DATA

R _{thj-case}	Thermal Resistance Junction-Case	Max	150	°C/W
R _{thj-amb}	Thermal Resistance Junction-Ambient	Max	450	°C/W

ELECTRICAL CHARACTERISTICS (T_{case} = 25 °C unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I _{CES}	Collector Cut-off Current (V _{BE} = 0)	V _{CE} = -35 V V _{CE} = -35 V T _C = 150 °C		-2	-20 -100 -10	nA nA μA
I _{CEx}	Collector Cut-off Current (V _{BE} = -2 V)	V _{CE} = -45 V T _C = 100 °C			-20	μA
I _{EBO}	Emitter Cut-off Current (I _C = 0)	V _{EB} = -4 V			-20	nA
V _{(BR)CES}	Collector-Emitter Breakdown Voltage (V _{BE} = 0)	I _C = -10 μA	-45			V
V _{(BR)CEO*}	Collector-Emitter Breakdown Voltage (I _B = 0)	I _C = -2 mA	-45			V
V _{(BR)EBO}	Emitter-Base Breakdown Voltage (I _C = 0)	I _E = -1 μA	-5			V
V _{CE(sat)*}	Collector-Emitter Saturation Voltage	I _C = -10 mA I _B = -0.25 mA I _C = -100 mA I _B = -2.5 mA		-0.12 -0.4	-0.25 -0.8	V V
V _{BE(sat)*}	Base-Emitter Saturation Voltage	I _C = -10 mA I _B = -0.25 mA I _C = -100 mA I _B = -2.5 mA	-0.6 -0.7	-0.7 -0.85	-0.85 -1.2	V V
V _{BE(ON)*}	Base-Emitter (On) Voltage	I _C = -10 μA V _{CE} = -5 V I _C = -2 mA V _{CE} = -5 V I _C = -10 mA V _{CE} = -1 V I _C = -100 mA V _{CE} = -1 V	-0.6	-0.55 -0.65 -0.68 -0.75	-0.75	V V V V
h _{FE*}	DC Current Gain	I _C = -10 μA V _{CE} = -5 V Gr. VIII Gr. IX Gr. X I _C = -2 mA V _{CE} = -5 V Gr. VIII Gr. IX Gr. X I _C = -10 mA V _{CE} = -1 V Gr. VIII Gr. IX Gr. X I _C = -100 mA V _{CE} = -1 V Gr. VIII Gr. IX Gr. X	30 40 100	200 270 340	310 460 630	
h _{fe*}	Small Signal Current Gain	I _C = -2 mA V _{CE} = -5 V f = 1 KHz Gr. VIII Gr. IX Gr. X	175 250 350	260 330 520	350 500 700	
f _T	Transition Frequency	I _C = -10 mA V _{CE} = -5 V f = 100 MHz		180		MHz


* Pulsed: Pulse duration = 300 μs, duty cycle ≤ 1 %

ELECTRICAL CHARACTERISTICS ($T_{\text{case}} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
C_{CBO}	Collector-Base Capacitance	$I_{\text{E}} = 0$ $V_{\text{CB}} = -10\text{ V}$ $f = 1\text{ MHz}$		4.5	7	pF
C_{EBO}	Emitter-Base Capacitance	$I_{\text{C}} = 0$ $V_{\text{EB}} = -0.5\text{ V}$ $f = 1\text{ MHz}$		11	15	pF
NF	Noise Figure	$I_{\text{C}} = -0.2\text{ mA}$ $V_{\text{CE}} = -5\text{ V}$ $f = 1\text{ KHz}$ $R_{\text{g}} = 2\text{ K}\Omega$ $\Delta f = 200\text{ Hz}$		2	6	dB
h_{ie}	Input Impedance	$I_{\text{C}} = -2\text{ mA}$ $V_{\text{CE}} = -5\text{ V}$ $f = 1\text{ KHz}$ Gr. VIII Gr. IX Gr. X		3.6 4.5 7.5		K Ω K Ω K Ω
h_{re}	Reverse Voltage Ratio	$I_{\text{C}} = -2\text{ mA}$ $V_{\text{CE}} = -5\text{ V}$ $f = 1\text{ KHz}$ Gr. VIII Gr. IX Gr. X		2 2 3		10^{-4} 10^{-4} 10^{-4}
h_{oe}	Output Admittance	$I_{\text{C}} = -2\text{ mA}$ $V_{\text{CE}} = -5\text{ V}$ $f = 1\text{ KHz}$ Gr. VIII Gr. IX Gr. X		24 30 50	50 60 100	μS μS μS
t_{d}	Delay Time	$V_{\text{CC}} = -10\text{ V}$ $I_{\text{C}} = -10\text{ mA}$ $I_{\text{B1}} = -1\text{ mA}$ $I_{\text{C}} = -100\text{ mA}$ $I_{\text{B1}} = -10\text{ mA}$		50 50		ns ns
t_{r}	Rise Time	$V_{\text{CC}} = -10\text{ V}$ $I_{\text{C}} = -10\text{ mA}$ $I_{\text{B1}} = -1\text{ mA}$ $I_{\text{C}} = -100\text{ mA}$ $I_{\text{B1}} = -10\text{ mA}$		35 5		ns ns
t_{s}	Storage Time	$V_{\text{CC}} = -10\text{ V}$ $I_{\text{C}} = -10\text{ mA}$ $I_{\text{B1}} = -I_{\text{B2}} = 1\text{ mA}$ $I_{\text{C}} = -100\text{ mA}$ $I_{\text{B1}} = -I_{\text{B2}} = 10\text{ mA}$		400 250		ns ns
t_{f}	Fall Time	$V_{\text{CC}} = -10\text{ V}$ $I_{\text{C}} = -10\text{ mA}$ $I_{\text{B1}} = -I_{\text{B2}} = 1\text{ mA}$ $I_{\text{C}} = -100\text{ mA}$ $I_{\text{B1}} = -I_{\text{B2}} = 10\text{ mA}$		80 200		ns ns
t_{on}	Turn-on Time	$V_{\text{CC}} = -10\text{ V}$ $I_{\text{C}} = -10\text{ mA}$ $I_{\text{B1}} = -1\text{ mA}$ $I_{\text{C}} = -100\text{ mA}$ $I_{\text{B1}} = -10\text{ mA}$		85 55	150 150	ns ns
t_{off}	Turn-off Time	$V_{\text{CC}} = -10\text{ V}$ $I_{\text{C}} = -10\text{ mA}$ $I_{\text{B1}} = -I_{\text{B2}} = 1\text{ mA}$ $I_{\text{C}} = -100\text{ mA}$ $I_{\text{B1}} = -I_{\text{B2}} = 10\text{ mA}$		480 480	800 800	ns ns

BCY79


Collector-Emitter Saturation Voltage

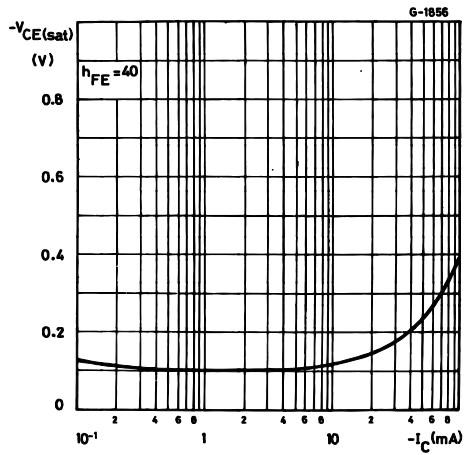


Base-Emitter Saturation Voltage

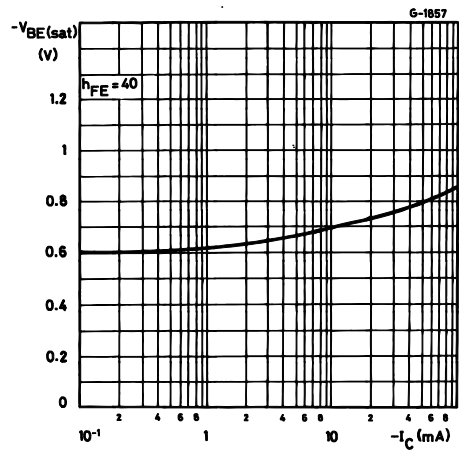


DC Current Gain

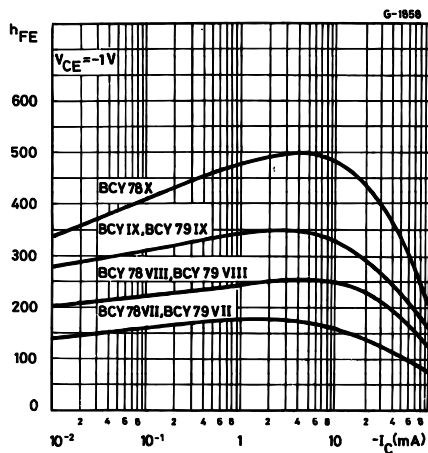


Normalized h Parameters

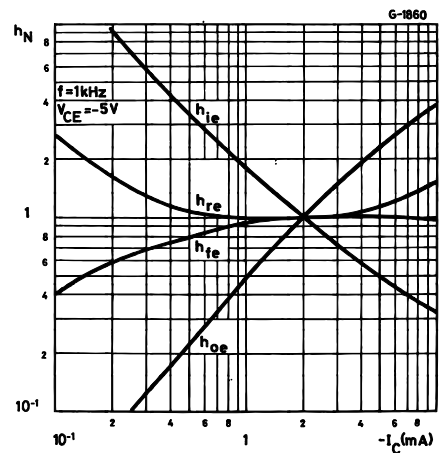

Noise Figure vs. Frequency

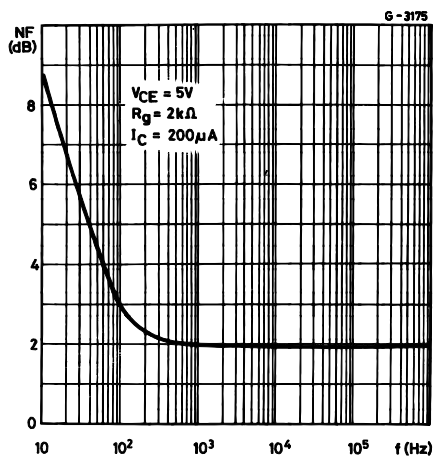


Noise Figure (f = 1 KHz)

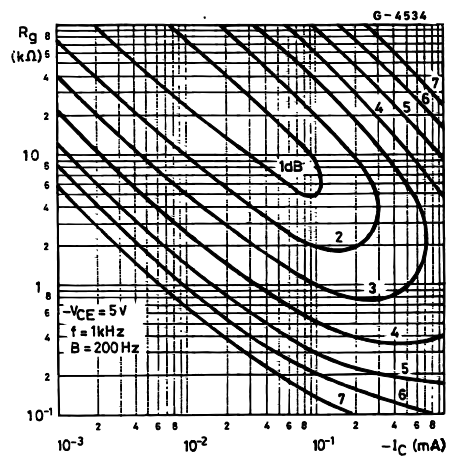

TO-18 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A		12.7			0.500	
B			0.49			0.019
D			5.3			0.208
E			4.9			0.193
F			5.8			0.228
G	2.54			0.100		
H			1.2			0.047
I			1.16			0.045
L	45°			45°		

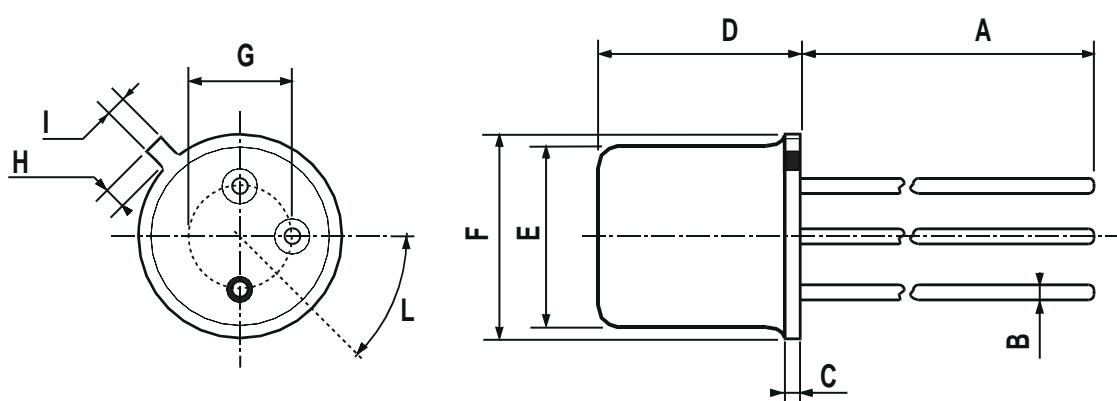

0016043

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 2002 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>