


- Series 310 and 350 interconnects are available in single and double row form.
- Single row interconnects having an even number of pins are now available with a left or right hand footprint.
- Headers (350 & 450) use MM# 3404 pins. (See page 170 for details)
- Sockets (310 & 410) use MM# 1005 receptacles and accept pin diameters from .015-.025. (See page 135 for details)
- Insulators are high temp. thermoplastic.

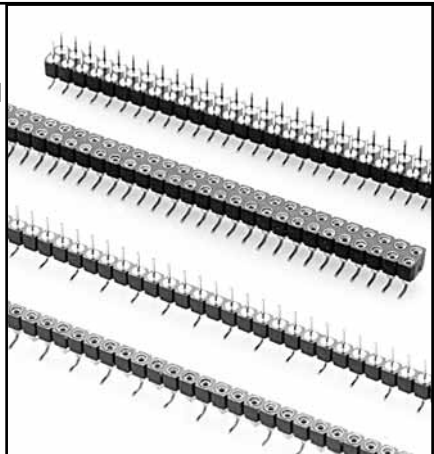

**Ordering Information**

<b>Fig. 1L</b>	<b>Single Row Header, Left Hand Footprint Odd or Even # of pins</b>							
	350-XX-1__-00-106 Specify # of pins → 01-64							
<b>Fig. 1R</b>	<b>Single Row Header, Right Hand Footprint Even # of pins</b>							
	350-XX-1__-00-107 Specify even # of pins → 02-64							
<b>Fig. 2</b>	<b>Double Row Header, Even # of pins</b>							
	450-XX-2__-00-106 Specify even # of pins → 02-72							
SPECIFY PLATING CODE XX=								
Pin Plating								
<table border="1"> <tr> <td><b>10</b></td> <td><b>90</b></td> </tr> <tr> <td>10μ" Au</td> <td>200μ" Sn/Pb</td> </tr> </table>			<b>10</b>	<b>90</b>	10μ" Au	200μ" Sn/Pb		
<b>10</b>	<b>90</b>							
10μ" Au	200μ" Sn/Pb							
<b>Fig. 3L</b>	<b>Single Row Socket, Left Hand Footprint Odd or Even # of pins</b>							
	310-XX-1__-41-105 Specify # of pins → 01-64							
<b>Fig. 3R</b>	<b>Single Row Socket, Right Hand Footprint Even # of pins</b>							
	310-XX-1__-41-107 Specify even # of pins → 02-64							
<b>Fig. 4</b>	<b>Double Row Socket, Even # of pins</b>							
	410-XX-2__-41-105 Specify even # of pins → 02-72							
SPECIFY PLATING CODE XX=								
Sleeve (Pin)								
Contact (Clip)								
<table border="1"> <tr> <td><b>93</b></td> <td><b>99</b></td> </tr> <tr> <td>200μ" Sn/Pb</td> <td>200μ" Sn/Pb</td> </tr> <tr> <td>30μ" Au</td> <td>200μ" Sn/Pb</td> </tr> </table>			<b>93</b>	<b>99</b>	200μ" Sn/Pb	200μ" Sn/Pb	30μ" Au	200μ" Sn/Pb
<b>93</b>	<b>99</b>							
200μ" Sn/Pb	200μ" Sn/Pb							
30μ" Au	200μ" Sn/Pb							