
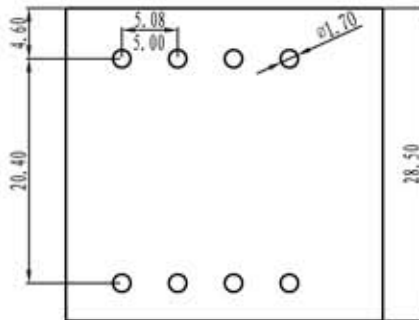
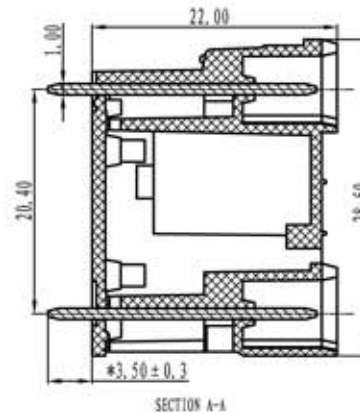


# euro-block

product specification

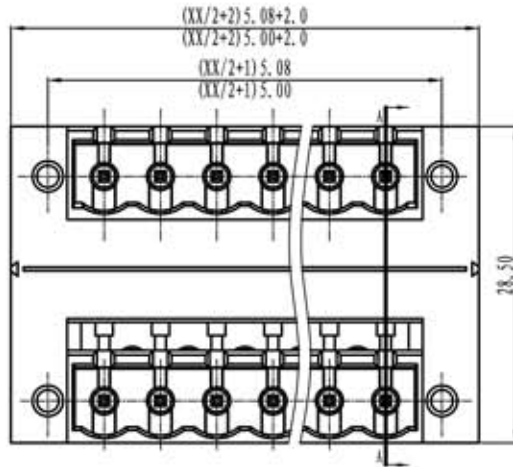

## Electrical

Standard: UL-IEC  
 Rated voltage: 300V-320V  
 Rated current: 15A-10A  
 Contact resistance: 20m  $\Omega$   
 Insulation resistance: 500M  $\Omega$ /DC500V  
 Withstanding voltage: AC2000V/1Min

## Mechanical

Temp.Range: -40°C~+105°C  
 MAX soldering: +250°C for 5 sec

## Dimensions

Pitch: 5.08mm-5.00mm  
 Poles: 2p-24p


## Material

Housing: PA66, UL94V-0  
 Pin header: Brass, Tin plated  
 Nut: M2.5 Brass

TOLERANCES EXCEPT AS NOTED

variable range	linear dimension				fillet	chamfer	short angle sid			≡	-	□	//	⊥		
	to	over	over	over	to	to	to	to	to						to	to
6	6	30	120	480	all	6	10	50	120	all	5	30	120			
tolerance	±0.1	±0.2	±0.3	±0.5	±0.2	±0.5	±1	1'	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

Schema generale del codice di ordinazione / General description of ordering code



UNITS	mm	SIZE	A4	SCALE	FIRST ANGLE PROJECTION	
					NAME	MDL-VF