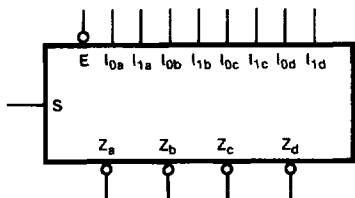


54AC/74AC158 • 54ACT/74ACT158**Quad 2-Input Multiplexer****Description**


The 'AC/ACT158 is a high-speed quad 2-input multiplexer. It selects four bits of data from two sources using the common Select and Enable inputs. The four buffered outputs present the selected data in the inverted form. The 'AC/ACT158 can also be used as a function generator.

- Outputs Source/Sink 24 mA
- 'ACT158 has TTL-Compatible Inputs

Ordering Code: See Section 6


Logic Symbol**Pin Names**

I0a - I0d	Source 0 Data Inputs
I1a - I1d	Source 1 Data Inputs
E	Enable Input
S	Select Input
Za - Zd	Inverted Outputs

Connection Diagrams

5

**Pin Assignment
for DIP, Flatpak and SOIC**



**Pin Assignment
for LCC**

Functional Description

The 'AC/ACT158 quad 2-input multiplexer selects four bits of data from two sources under the control of a common Select input (S) and presents the data in inverted form at the four outputs. The Enable input (\bar{E}) is active-LOW. When \bar{E} is HIGH, all of the outputs (Z) are forced HIGH regardless of all other inputs. The 'AC/ACT158 is the logic implementation of a 4-pole, 2-position switch where the position of the switch is determined by the logic levels supplied to the Select input.

A common use of the 'AC/ACT158 is the moving of data from two groups of registers to four common output busses. The particular register from which the data comes is determined by the state of the Select input. A less obvious use is as a function generator. The 'AC/ACT158 can

generate four functions of two variables with one variable common. This is useful for implementing gating functions.

Truth Table


Inputs			Output	
E	S	I ₀	I ₁	Z
H	X	X	X	H
L	L	L	X	H
L	L	H	X	L
L	H	X	L	H
L	H	X	H	L

H = HIGH Voltage Level

L = LOW Voltage Level

X = Immaterial

Logic Diagram

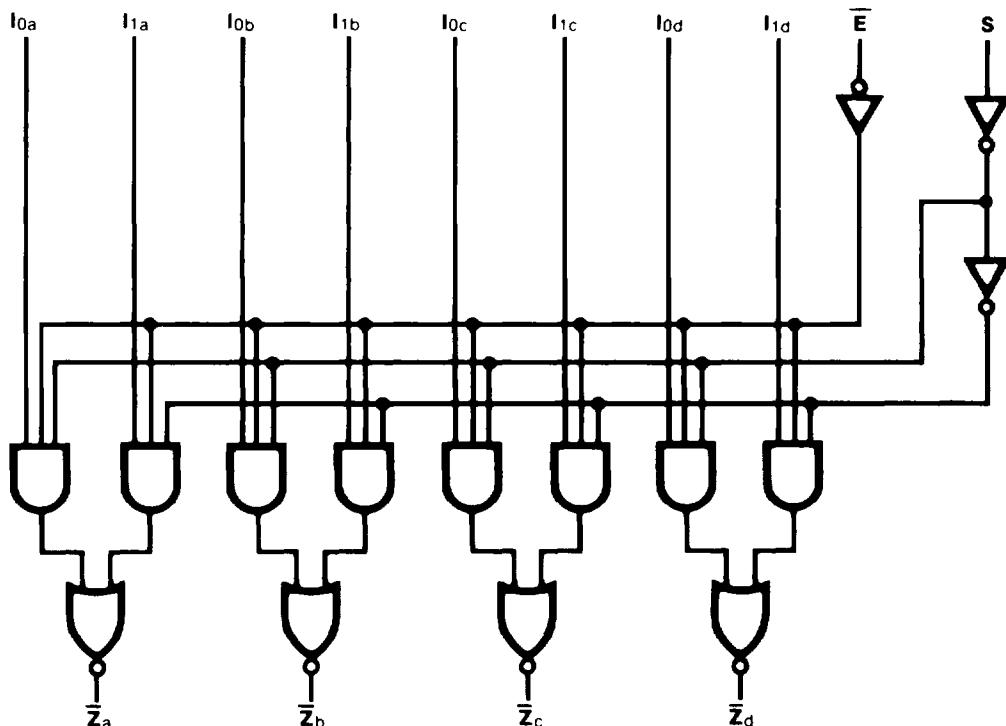

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

DC Characteristics (unless otherwise specified)

Symbol	Parameter	54AC/ACT	74AC/ACT	Units	Conditions
I _{CC}	Maximum Quiescent Supply Current	160	80	μA	V _{IN} = V _{CC} or Ground, V _{CC} = 5.5 V, TA = Worst Case
I _{CC}	Maximum Quiescent Supply Current	8.0	8.0	μA	V _{IN} = V _{CC} or Ground, V _{CC} = 5.5 V, TA = 25°C
I _{CCT}	Maximum Additional I _{CC} /Input ('ACT158)	1.6	1.5	mA	V _{IN} = V _{CC} - 2.1 V V _{CC} = 5.5 V TA = Worst Case

AC Characteristics

Symbol	Parameter	V _{CC} * (V)	74AC			54AC		74AC		Units	Fig. No.		
			TA = +25°C CL = 50 pF			TA = -55°C to +125°C CL = 50 pF		TA = -40°C to +85°C CL = 50 pF					
			Min	Typ	Max	Min	Max	Min	Max				
t _{PLH}	Propagation Delay S to Z _n	3.3 5.0	1.0 1.0	7.0 5.5	11.5 9.0	1.0 1.0	13.5 10.5	1.0 1.0	12.5 9.5	ns	3-6		
t _{PHL}	Propagation Delay S to Z _n	3.3 5.0	1.0 1.0	7.0 5.5	11.5 9.0	1.0 1.0	14.0 10.5	1.0 1.0	12.5 10.0	ns	3-6		
t _{PLH}	Propagation Delay E to Z _n	3.3 5.0	1.0 1.0	7.5 6.0	12.0 9.5	1.0 1.0	14.5 11.0	1.0 1.0	13.0 10.5	ns	3-6		
t _{PHL}	Propagation Delay E to Z _n	3.3 5.0	1.0 1.0	7.0 5.5	11.0 8.5	1.0 1.0	13.0 10.0	1.0 1.0	12.0 9.5	ns	3-6		
t _{PLH}	Propagation Delay I _n to Z _n	3.3 5.0	1.0 1.0	5.5 4.0	9.0 7.0	1.0 1.0	10.5 8.5	1.0 1.0	10.0 7.5	ns	3-5		
t _{PHL}	Propagation Delay I _n to Z _n	3.3 5.0	1.0 1.0	5.0 4.0	8.0 6.5	1.0 1.0	9.5 7.5	1.0 1.0	8.5 6.5	ns	3-5		

*Voltage Range 3.3 is 3.3 V ± 0.3 V

Voltage Range 5.0 is 5.0 V ± 0.5 V

Military parameters given herein are for general references only. For current military specifications and subgroup testing information please request Fairchild's Table I data sheet from your Fairchild sales engineer or account representative.

AC Characteristics

Symbol	Parameter	Vcc* (V)	74ACT			54ACT		74ACT		Units	Fig. No.		
			TA = +25°C CL = 50 pF			TA = -55°C to +125°C CL = 50 pF		TA = -40°C to +85°C CL = 50 pF					
			Min	Typ	Max	Min	Max	Min	Max				
tPLH	Propagation Delay S to Z _n	5.0	1.0	6.0	9.5	1.0	12.0	1.0	11.0	ns	3-6		
tPHL	Propagation Delay S to Z _n	5.0	1.0	5.5	9.0	1.0	11.0	1.0	10.0	ns	3-6		
tPLH	Propagation Delay E to Z _n	5.0	1.0	5.5	9.5	1.0	11.0	1.0	10.5	ns	3-6		
tPHL	Propagation Delay E to Z _n	5.0	1.0	5.5	9.5	1.0	11.5	1.0	10.5	ns	3-6		
tPLH	Propagation Delay I _n to Z _n	5.0	1.0	4.5	8.0	1.0	9.5	1.0	8.5	ns	3-6		
tPHL	Propagation Delay I _n to Z _n	5.0	1.0	4.0	6.5	1.0	8.0	1.0	7.5	ns	3-6		

*Voltage Range 5.0 is 5.0 V ± 0.5 V

Military parameters given herein are for general references only. For current military specifications and subgroup testing information please request Fairchild's Table I data sheet from your Fairchild sales engineer or account representative.

Capacitance

Symbol	Parameter	54/74AC/ACT		Conditions
		Typ	Units	
C _{IN}	Input Capacitance	4.5	pF	V _{CC} = 5.5 V
C _{PD}	Power Dissipation Capacitance	45.0	pF	V _{CC} = 5.5 V