

16K x 4 Static RAM

L7C161/162

FEATURES

- ❑ 16K x 4 Static RAM with Separate I/O, Transparent Write (L7C161), or High Impedance Write (L7C162)
- ❑ Auto-Powerdown™ Design
- ❑ Advanced CMOS Technology
- ❑ High Speed — to 8 ns maximum
- ❑ Low Power Operation
Active: 210 mW typical at 35 ns
Standby: 500 μW typical
- ❑ Data Retention at 2 V for Battery Backup Operation
- ❑ Plug Compatible with IDT 71981/71982, Cypress CY7C161/162
- ❑ Package Styles Available:
 - 28-pin Plastic DIP
 - 28-pin Sidebrazed, Hermetic DIP
 - 28-pin CerDIP
 - 28-pin Plastic SOIC
 - 28-pin Plastic SOJ
 - 28-pin Ceramic LCC

DESCRIPTION

The L7C161 and L7C162 are high-performance, low-power CMOS static RAMs. The storage cells are organized as 16,384 words by 4 bits per word. Data In and Data Out are separate. These devices are available in seven speeds with maximum access times from 8 ns to 35 ns.

Inputs and output are TTL compatible. Operation is from a single +5 V power supply. Power consumption is 210 mW (typical) at 35 ns. Dissipation drops to 75 mW (typical) when the memory is deselected (Enable is high).

Two standby modes are available. Proprietary Auto-Powerdown™ circuitry reduces power consumption automatically during read or write accesses which are longer than the minimum access time, or when the

memory is deselected. In addition, data may be retained in inactive storage with a supply voltage as low as 2 V. The L7C161 and L7C162 consume only 30 μW (typical) at 3 V, allowing effective battery backup operation.

The L7C161 and L7C162 provide asynchronous (unlocked) operation with matching access and cycle times. Two active-low Chip Enables and a three-state bus output with a separate Output Enable control simplify the connection of several chips for increased storage capacity.



Memory locations are specified on address pins A0 through A13. Reading from a designated location is accomplished by presenting an address and driving $\overline{CE1}$ and $\overline{CE2}$ low while \overline{WE} remains high. The data in the addressed memory location will then appear on the Data Out pins within one access time. The output pins stay in a high-impedance state when \overline{WE} is low (L7C162 only) or $\overline{CE1}$, $\overline{CE2}$, or \overline{OE} is high.

Writing to an addressed location is accomplished when the active-low $\overline{CE1}$ and $\overline{CE2}$ and \overline{WE} inputs are all low. Any of these signals may be used to terminate the write operation. The Data In and Data Out signals have the same polarity.

Latchup and static discharge protection are provided on-chip. The L7C161 and L7C162 can withstand an injection current of up to 200 mA on any pin without damage.

2

L7C161/162 Block Diagram

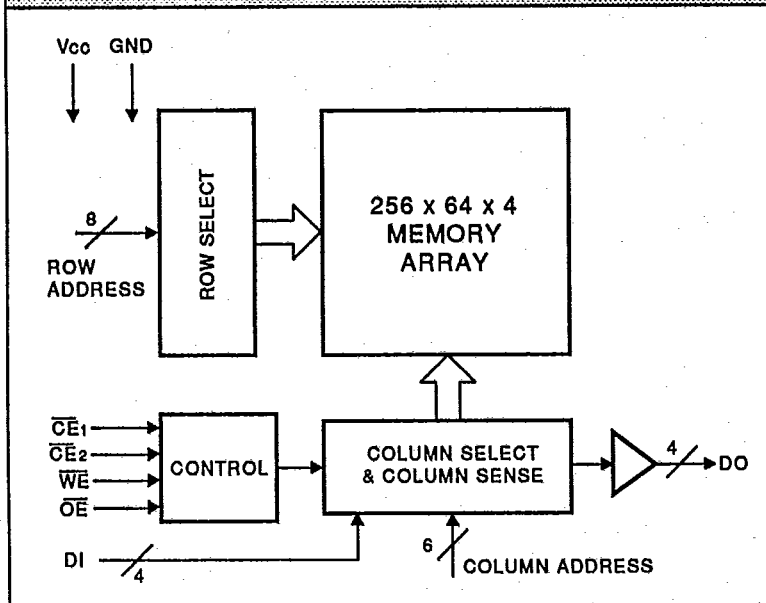

T-46-23-10

MAXIMUM RATINGS Above which useful life may be impaired (Notes 1, 2)

| | |
|---|------------------|
| Storage temperature | -65°C to +150°C |
| Operating ambient temperature | -55°C to +125°C |
| Vcc supply voltage with respect to ground | -0.5 V to +7.0 V |
| Input signal with respect to ground | -3.0 V to +7.0 V |
| Signal applied to high impedance output | -3.0 V to +7.0 V |
| Output current into low outputs | 25 mA |
| Latchup current | > 200 mA |

OPERATING CONDITIONS To meet specified electrical and switching characteristics

| Mode | Temperature Range (Ambient) | Supply Voltage |
|------------------------------|-----------------------------|---------------------|
| Active Operation, Commercial | 0°C to +70°C | 4.5 V ≤ Vcc ≤ 5.5 V |
| Active Operation, Military | -55°C to +125°C | 4.5 V ≤ Vcc ≤ 5.5 V |
| Data Retention, Commercial | 0°C to +70°C | 2.0 V ≤ Vcc ≤ 5.5 V |
| Data Retention, Military | -55°C to +125°C | 2.0 V ≤ Vcc ≤ 5.5 V |

ELECTRICAL CHARACTERISTICS Over Operating Conditions (Note 5)

| Symbol | Parameter | Test Condition | Min | Typ | Max | Unit |
|--------|-----------------------------|----------------------------------|------|-----|-----------|------|
| VOH | Output High Voltage | IOH = -4.0 mA, Vcc = 4.5 V | 2.4 | | | V |
| VOL | Output Low Voltage | IOL = 8.0 mA | | | 0.4 | V |
| VIH | Input High Voltage | | 2.0 | | Vcc + 0.3 | V |
| VIL | Input Low Voltage | (Note 3) | -3.0 | | 0.8 | V |
| IIX | Input Current | GND ≤ VIN ≤ Vcc | -10 | | +10 | μA |
| IOZ | Output Leakage Current | GND ≤ VOUT ≤ Vcc, CE = Vcc | -10 | | +10 | μA |
| IOS | Output Short Current | VOUT = GND, Vcc = Max (Note 4) | | | -350 | mA |
| ICC2 | Vcc Current, TTL Inactive | (Note 7) | | 15 | 30 | mA |
| ICC3 | Vcc Current, CMOS Standby | (Note 8) | | 100 | 500 | μA |
| ICC4 | Vcc Current, Data Retention | Vcc = 3.0 V (Note 9) | | 10 | 250 | μA |
| CIN | Input Capacitance | Ambient Temp = 25°C, Vcc = 5.0 V | | | 5 | pF |
| COU | Output Capacitance | Test Frequency = 1 MHz (Note 10) | | | 7 | pF |

| Symbol | Parameter | Test Condition | L7C161/162- | | | | | | | Unit |
|--------|---------------------|----------------|-------------|-----|-----|-----|-----|-----|-----|------|
| | | | 35 | 25 | 20 | 15 | 12 | 10 | 8 | |
| ICC1 | Vcc Current, Active | (Note 6) | 75 | 100 | 125 | 160 | 190 | 205 | 225 | mA |






Memory Products

SWITCHING CHARACTERISTICS Over Operating Range (ns)

READ CYCLE (Notes 5, 11, 12, 22, 23, 24)

| Symbol | Parameter | L7C161/162- | | | | | | | | | | | | | |
|--------|--|-------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | | 35 | | 25 | | 20 | | 15 | | 12 | | 10 | | 8 | |
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| tAVAV | Read Cycle Time | 35 | | 25 | | 20 | | 15 | | 12 | | 10 | | 8 | |
| tAVQV | Address Valid to Output Valid (13, 14) | | 35 | | 25 | | 20 | | 15 | | 12 | | 10 | | 8 |
| tAXOX | Address Change to Output Change | 3 | | 3 | | 3 | | 3 | | 3 | | 3 | | 3 | |
| tCLOV | Chip Enable Low to Output Valid (13, 15) | | 35 | | 25 | | 20 | | 15 | | 12 | | 10 | | 8 |
| tCLOZ | Chip Enable Low to Output Low Z (20, 21) | 3 | | 3 | | 3 | | 3 | | 3 | | 3 | | 3 | |
| tCHOZ | Chip Enable High to Output High Z (20, 21) | | 15 | | 10 | | 8 | | 8 | | 5 | | 4 | | 4 |
| tOLQV | Output Enable Low to Output Valid | | 15 | | 12 | | 10 | | 8 | | 6 | | 5 | | 4 |
| tOLOZ | Output Enable Low to Output Low Z (20, 21) | 0 | | 0 | | 0 | | 0 | | 0 | | 0 | | 0 | |
| tOHOZ | Output Enable High to Output High Z (20, 21) | | 12 | | 10 | | 8 | | 5 | | 5 | | 4 | | 4 |
| tPU | Input Transition to Power Up (10, 19) | 0 | | 0 | | 0 | | 0 | | 0 | | 0 | | 0 | |
| tPD | Power Up to Power Down (10, 19) | | 35 | | 25 | | 20 | | 20 | | 20 | | 18 | | 15 |
| tCHVL | Chip Enable High to Data Retention (10) | 0 | | 0 | | 0 | | 0 | | 0 | | 0 | | 0 | |

2

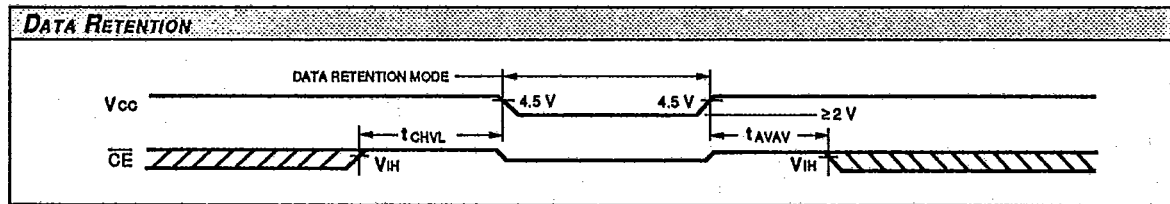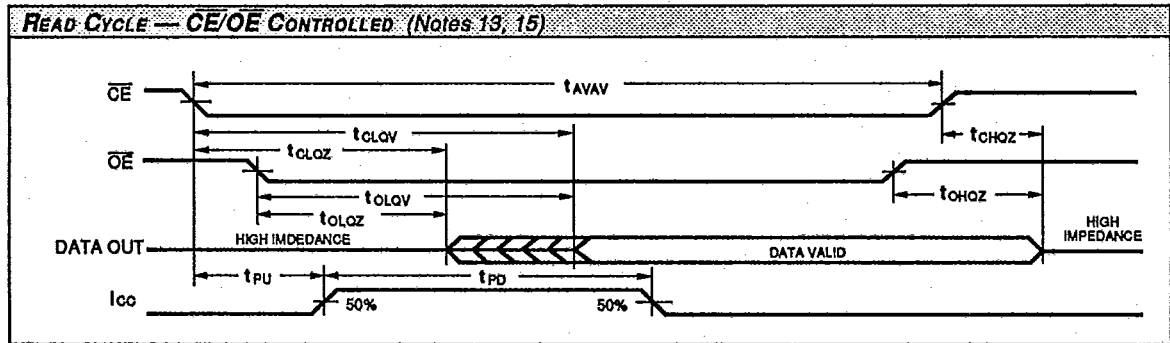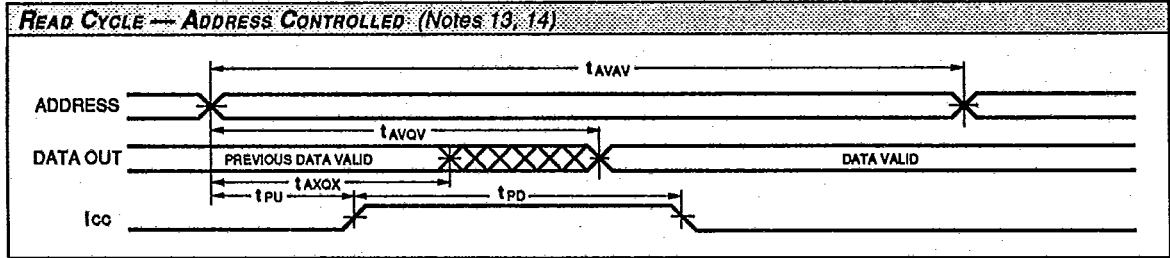


SWITCHING CHARACTERISTICS *Over Operating Range (ns)*


WRITE CYCLE (Notes 5, 11, 12, 22, 23, 24)

| Symbol Parameter | | L7C161/162- | | | | | | | | | | | | | | | |
|-----------------------|--|-------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|--|
| | | 35 | | 25 | | 20 | | 15 | | 12 | | 10 | | 8 | | | |
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | | |
| tAVAV | Write Cycle Time | 25 | | 20 | | 20 | | 15 | | 12 | | 10 | | 8 | | 8 | |
| tCLEW | Chip Enable Low to End of Write Cycle | 25 | | 15 | | 15 | | 12 | | 10 | | 8 | | 8 | | | |
| tAVBW | Address Valid to Beginning of Write Cycle | 0 | | 0 | | 0 | | 0 | | 0 | | 0 | | 0 | | | |
| tAVEW | Address Valid to End of Write Cycle | 25 | | 15 | | 15 | | 12 | | 10 | | 8 | | 8 | | | |
| tEWAX | End of Write Cycle to Address Change | 0 | | 0 | | 0 | | 0 | | 0 | | 0 | | 0 | | | |
| tWLEW | Write Enable Low to End of Write Cycle | 20 | | 15 | | 15 | | 12 | | 10 | | 8 | | 6.5 | | | |
| tDVEW | Data Valid to End of Write Cycle | 15 | | 10 | | 10 | | 7 | | 6 | | 5 | | 4 | | | |
| tEWDX | End of Write Cycle to Data Change | 0 | | 0 | | 0 | | 0 | | 0 | | 0 | | 0 | | | |
| tWHOZ | Write Enable High to Output Low Z (20, 21) | 0 | | 0 | | 0 | | 0 | | 0 | | 0 | | 0 | | | |
| tWLOZ | Write Enable Low to Output High Z (20, 21) | | 10 | | 7 | | 7 | | 5 | | 4 | | 4 | | 3 | | |
| tWLOV | Write Enable Low to Output Valid | | 30 | | 20 | | 15 | | 15 | | 12 | | 10 | | 8 | | |
| tDVQV | Data Valid to Output Valid | | 30 | | 20 | | 15 | | 15 | | 12 | | 10 | | 8 | | |

WRITE CYCLE — WE CONTROLLED (Notes 16, 17, 18, 19)

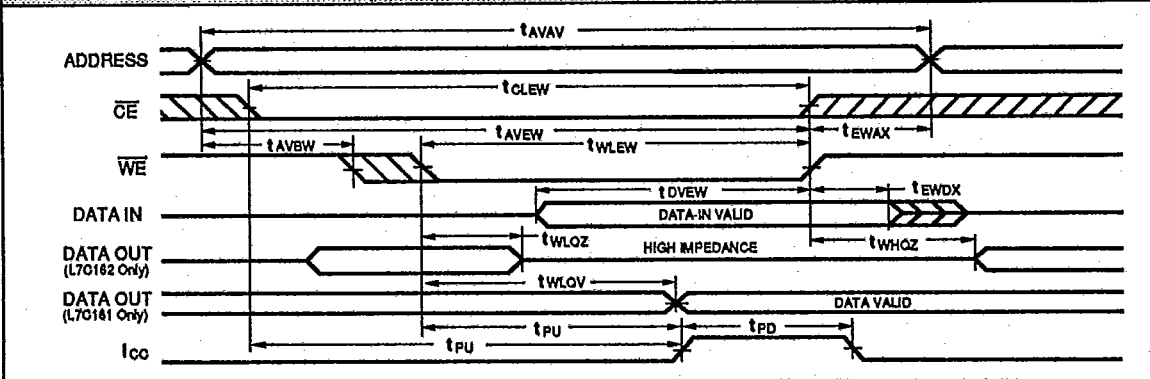

WRITE CYCLE — CE CONTROLLED (Notes 16, 17, 18, 19)

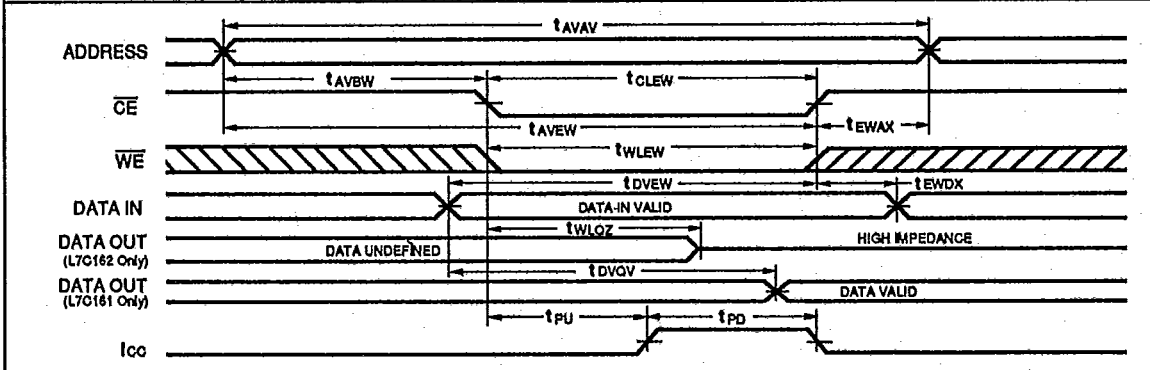

NOTES

1. Maximum Ratings indicate stress specifications only. Functional operation of these products at values beyond those indicated in the Operating Conditions table is not implied. Exposure to maximum rating conditions for extended periods may affect reliability of the tested device.
2. The products described by this specification include internal circuitry designed to protect the chip from damaging substrate injection currents and accumulations of static charge. Nevertheless, conventional precautions should be observed during storage, handling, and use of these circuits in order to avoid exposure to excessive electrical stress values.
3. This product provides hard clamping of transient undershoot. Input levels below ground will be clamped beginning at -0.6 V. A current in excess of 100 mA is required to reach -2 V. The device can withstand indefinite operation with inputs as low as -3 V subject only to power dissipation and bond wire fusing constraints.
4. Duration of the output short circuit should not exceed 30 seconds.
5. A series of normalized curves on pages 2-8 through 2-11 of this data book supply the designer with typical DC and AC parametric information for Logic Devices Static RAMs. These curves may be used to determine device characteristics at various temperatures and voltage levels.
6. Tested with all address and data inputs changing at the maximum cycle rate. The device is continuously enabled for writing, i.e., $\overline{CE}x \leq \overline{VIL}$, $\overline{WE} \leq \overline{VIL}$. Input pulse levels are 0 to 3.0 V.
7. Tested with outputs open and all address and data inputs changing at the maximum read cycle rate. The device is continuously disabled, i.e., $CE1$ or $CE2 \geq \overline{VIH}$.
8. Tested with outputs open and all address and data inputs stable. The device is continuously disabled, i.e., $CE1$ or $CE2 = VCC$. Input levels are within 0.2 V of VCC or GND.
9. Data retention operation requires that VCC never drop below 2.0 V. $CE1$ or $CE2$ must be $\geq VCC - 0.2$ V. For all other inputs $VIN \geq VCC - 0.2$ V or $VIN \leq 0.2$ V is required to ensure full powerdown.
10. These parameters are guaranteed but not 100% tested.
11. Test conditions assume input transition times of less than 3 ns, reference levels of 1.5 V, output loading for specified IOL and

IOH plus 30 pF (Fig. 1a), and input pulse levels of 0 to 3.0 V (Fig. 2).

12. Each parameter is shown as a minimum or maximum value. Input requirements are specified from the point of view of the external system driving the chip. For example, t_{AVSW} is specified as a minimum since the external system must supply at least that much time to meet the worst-case requirements of all parts. Responses from the internal circuitry are specified from the point of view of the device. Access time, for example, is specified as a maximum since worst-case operation of any device always provides data within that time.

13. WE is high for the read cycle.
14. The chip is continuously selected ($CE1$ and $CE2$ low).
15. All address lines are valid prior to or coincident with the later of $CE1$ and $CE2$ transition to low.

16. The internal write cycle of the memory is defined by the overlap of $CE1$, $CE2$ low and WE low. All three signals must be low to initiate a write. Any signal can terminate a write by going high. The address, data, and control input setup and hold times should be referenced to the signal that falls last or rises first.

17. If WE goes low before or concurrent with the later of $CE1$ and $CE2$ going low, the output remains in a high impedance state.

18. If $CE1$ or $CE2$ goes high before or concurrent with WE going high, the output remains in a high impedance state.

19. Powerup from ICC2 to ICC1 occurs as a result of any of the following conditions:

- a. Falling edge of $\overline{CE}x$ (other \overline{CE} active).
- b. Falling edge of WE ($\overline{CE}1$, $\overline{CE}2$ active).
- c. Transition on any address line ($CE1$, $CE2$ active).
- d. Transition on any data line ($CE1$, $CE2$, and WE active).

The device automatically powers down from ICC2 to ICC1 after t_{PD} has elapsed from any of the prior conditions. This means that power dissipation is dependent on only cycle rate, and is not on Chip Select pulse width.

20. At any given temperature and voltage condition, output disable time is less than output enable time for any given device.

21. Transition is measured ± 200 mV from steady state voltage with specified loading in Fig. 1b. This parameter is sampled and not 100% tested.

22. All address timings are referenced from the last valid address line to the first transitioning address line.

23. $\overline{CE}1$, $\overline{CE}2$, or \overline{WE} must be high during address transitions.

24. This product is a very high speed device and care must be taken during testing in order to realize valid test information. Inadequate attention to setups and procedures can cause a good part to be rejected as faulty. Long high inductance leads that cause supply bounce must be avoided by bringing the VCC and ground planes directly up to the contactor fingers. A 0.01 μ F high frequency capacitor is also required between VCC and ground. To avoid signal reflections, proper terminations must be used.

2

FIGURE 1a.

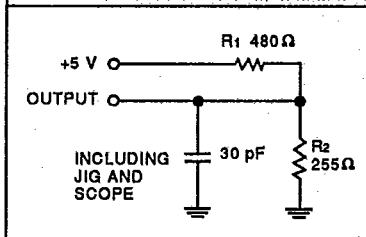


FIGURE 1b.




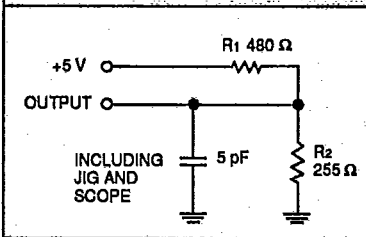


FIGURE 2.

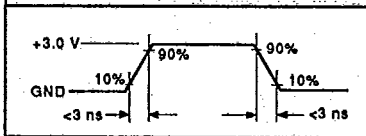
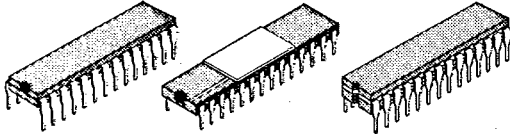


ORDERING INFORMATION



28-pin
(0.3" wide)



28-pin



28-pin



| Speed | Plastic DIP (P10) | Sidebraze Hermetic DIP (D10) | CerDIP (C5) | Plastic SOIC (.300" - U2) | Plastic SOJ (.300" - W2) | Ceramic Leadless Chip Carrier (K5) |
|--|----------------------------|------------------------------|------------------------------|----------------------------|----------------------------|------------------------------------|
| 0°C to +70°C — COMMERCIAL SCREENING | | | | | | |
| 35 ns 25 ns 20 ns 15 ns 12 ns 10 ns 8 ns | L7C161PC or L7C162PC | L7C161DC or L7C162DC | L7C161CC or L7C162CC | L7C161UC or L7C162UC | L7C161WC or L7C162WC | L7C161KC or L7C162KC |
| -55°C to +125°C — COMMERCIAL SCREENING | | | | | | |
| 35 ns 25 ns 20 ns 15 ns 12 ns 10 ns 8 ns | | L7C161DM or L7C162DM | L7C161CM or L7C162CM | | | L7C161KM or L7C162KM |
| -55°C to +125°C — EXTENDED SCREENING | | | | | | |
| 35 ns 25 ns 20 ns 15 ns 12 ns 10 ns 8 ns | | L7C161DME or L7C162DME | L7C161CME or L7C162CME | | | L7C161KME or L7C162KME |
| -55°C to +125°C — MIL-STD-883 COMPLIANT | | | | | | |
| 35 ns 25 ns 20 ns 15 ns 12 ns 10 ns 8 ns | | L7C161DMB or L7C162DMB | L7C161CMB or L7C162CMB | | | L7C161KMB or L7C162KMB |

