


Edgecard connectors

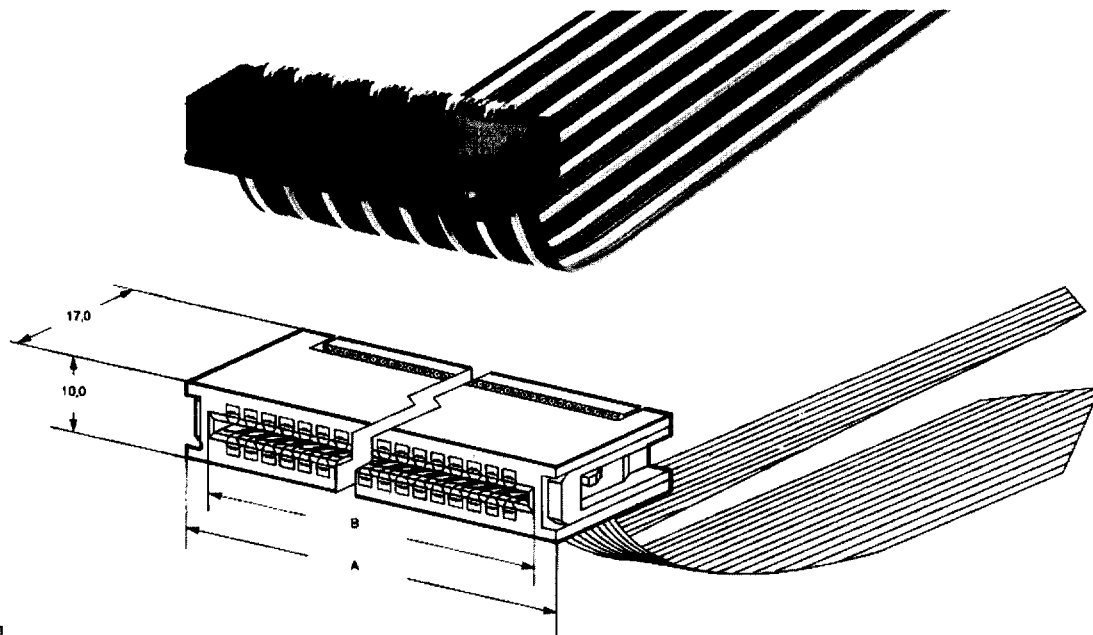

Pitch 2.54 mm

Part no.	Dimensions (mm / inch)		
	No. of contacts	A	B
AWDS 20 - OF1	20	35,1 / 1.382	27,94 / 1.100
AWDS 26 - OF1	26	42,7 / 1.681	35,56 / 1.140
AWDS 34 - OF1	34	52,9 / 2.083	45,72 / 1.800

Part no.	Dimensions (mm / inch)		
	No. of contacts	A	B
AWDS 40 - OF1	40	60,5 / 2.382	53,34 / 2.101
AWDS 50 - OF1	50	73,2 / 2.882	66,04 / 2.601

AWB Polarizing key

Contacts

Copper alloy
Gold over nickel

Insulators

Polyester GV, VO, UL 94
Operating temperature range
- 65 °C to +120 °C

Current rating 1 A

Tensile strength 500 V_{eff}
Operating voltage 250 V
Insulation resistance 5 x 10⁹ Ω
Contact resistance max. 30 m Ω

Different numbers of contacts to those shown, are available on request