

Fig. 1

- Series (800 & 802) single & double row interconnects feature sturdy 1,02 diameter leads and low profile (1,80 thick) insulator.
- Sockets (801 & 803) use (MM # 1313) receptacles that accept pin diameters from 0,94 -1,09, (See page 149 for details).

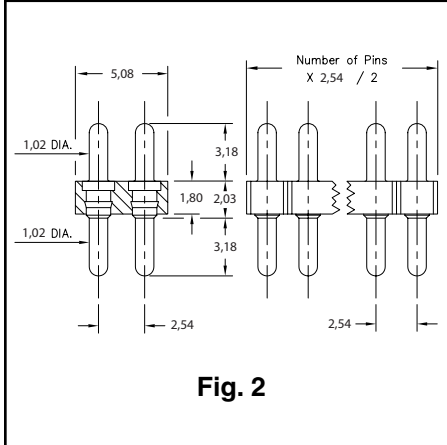
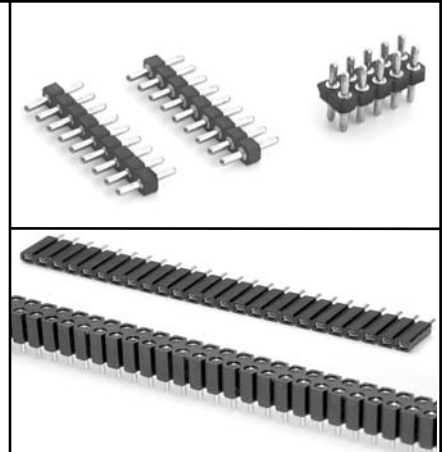


Fig. 2

Ordering Information

Fig. 1	Series 800...10-004 Single Row Pin Header
	800-XX-0__-10-004000 Specify # of pins → 01-50
Fig. 2	Series 802...10-004 Double Row Pin Header
	802-XX-0__-10-004000 Specify # of pins → 04-72

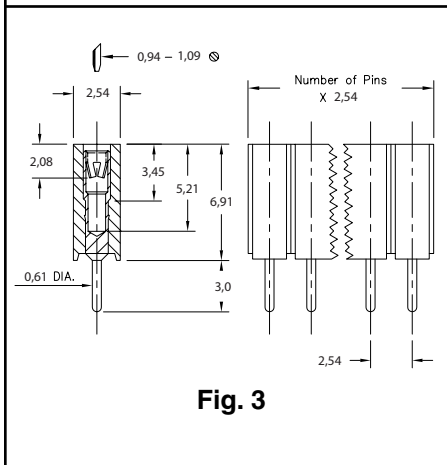


Fig. 3

XX= Plating Code See Below
For RoHS compliance, select plating code. For the gold option (XX=10) also change part number from 80X-XX-0XX-X0-001000 to 80X-10-0XX-X0-001100

SPECIFY PLATING CODE XX=	10	90	40	
Pin Plating	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn	

Fig. 3	Series 801...10-004 Single Row Socket
	801-XX-0__-10-004000 Specify # of pins → 01-50
Fig. 4	Series 803...10-004 Double Row Socket
	803-XX-__-10-004000 Specify # of pins → 004-100

XX= Plating Code See Below

SPECIFY PLATING CODE XX=	13	93	99	43	44
Sleeve (Pin)	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn/Pb	5,08µm Sn	5,08µm Sn
Contact (Clip)	0,76µm Au	0,76µm Au	5,08µm Sn/Pb	0,76µm Au	5,08µm Sn