

RF AMPLIFIER

MODEL *TM5136PM*

Available as: TM5136PM, 4 Pin TO-8 (T4)
 TN5136PM, 4 Pin Surface Mount (SM3)
 FP5136PM, 4 Pin Flatpack (FP4)
 BX5136PM, Connectorized Housing (H1)

Features

- Superior Phase Noise Performance
- High Gain: 20 dB Typical
- High Output Power: +21 dBm Typical
- Operating Temp. -40 °C to +85 °C

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -40 °C to +85 °C
Frequency	10 - 200 MHz	10 - 200 MHz
Gain (dB)	20.0	19.0 Min.
Power @ 1 dB Comp. (dBm)	+21	+19 Min.
Reverse Isolation (dB)	-26	-25 Min.
VSWR In	1.5:1	1.5:1 Max.
VSWR Out	1.5:1	2.0:1 Max.
Noise Figure (dB)	4.0	4.4 Max.
Power Vdc	+15	+15
mA	70	70 Max.

Note: Care should always be taken to effectively ground the case of each unit.

Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +52 dBm (Typ.)
 Second Order Two Tone Intercept Point +45 dBm (Typ.)
 Third Order Two Tone Intercept Point +33 dBm (Typ.)


Maximum Ratings

Ambient Operating Temperature -55°C to +100 °C
 Storage Temperature -62°C to +125 °C
 Case Temperature +125 °C
 DC Voltage +18 Volts
 Continuous RF Input Power +13 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Guaranteed Phase Noise Performance (dBc/Hz)

Frequency	Typical	Guarantee (Min.)
100 Hz	-155	-151
1 kHz	-168	-164
10 kHz	-172	-168
100 kHz	-173	-169
1 MHz	-173	-169

Typical Performance Data

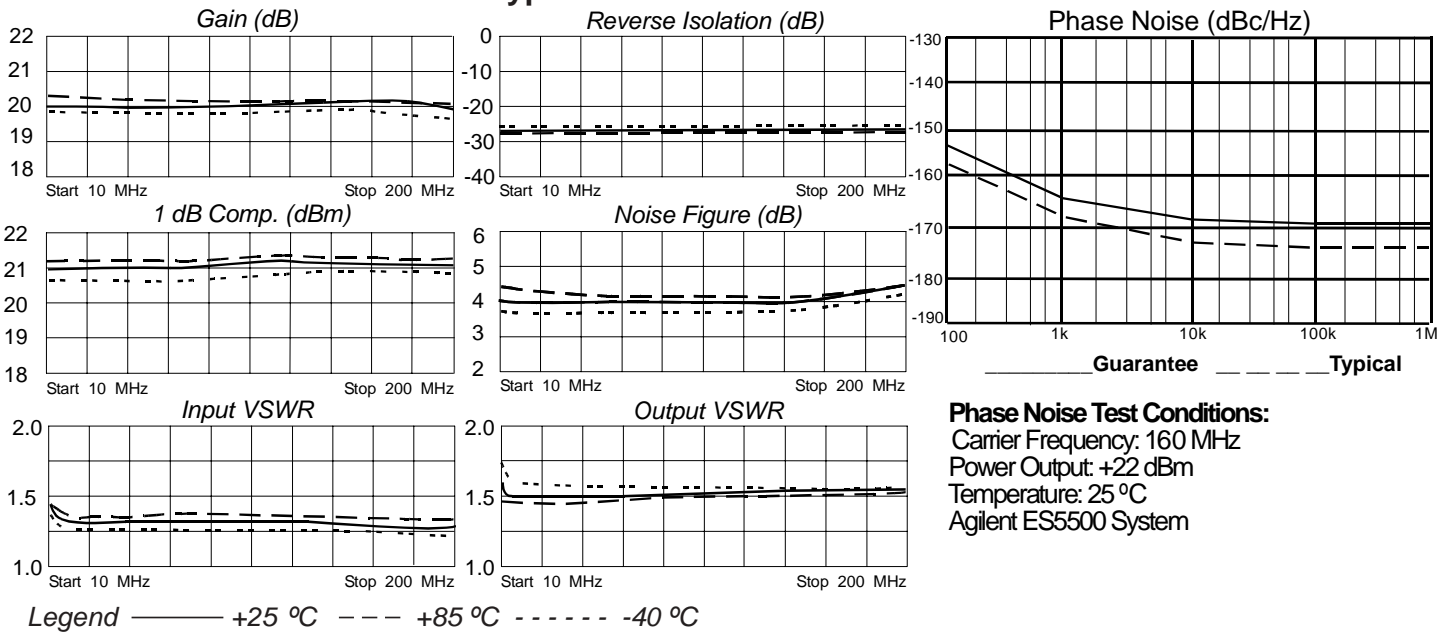

Linear S-Parameters

Freq. MHz	---S11---		---S21---		---S12---		---S22---	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
10	.27	- 24	9.55	-168	.054	-167	.22	-23
20	.25	- 19	9.73	-179	.055	-177	.19	-19
50	.24	- 28	9.88	166	.054	162	.18	-22
100	.22	- 57	10.04	146	.056	135	.20	-45
150	.21	-100	10.13	125	.055	113	.22	-75
200	.26	-153	9.92	103	.055	88	.25	-113
250	.38	-165	9.25	79	.049	69	.28	-156



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 3/31/04

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001