




(0,40mm) .01575"

SS4, ST4 SERIES

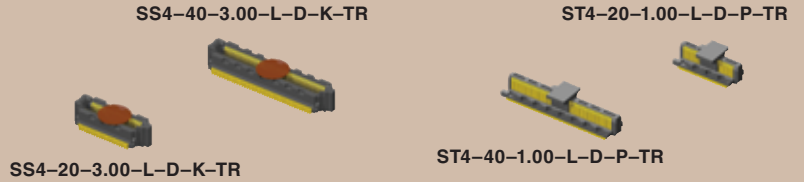

ULTRA FINE PITCH HEADER & SOCKET

SS4 Mates with:
ST4
ST4 Mates with:
SS4

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?SS4 or www.samtec.com?ST4

Insulator Material:
Black LCP

Contact Material:
Phosphor Bronze

Plating:
Au or Sn over 50µ" (1,27µm) Ni

Operating Temp Range:
-55°C to +125°C

Current Rating:
1.3A @ 80°C ambient

RoHS Compliant:
Yes

Processing:

Max Processing Temp:
230°C for 60 seconds, or
260°C for 20 seconds 3x

Lead-Free Solderable:
Yes

SMT Lead Coplanarity:
(0,10mm) .004" max


SS4	POSITIONS PER ROW	LEAD STYLE	PLATING OPTION	D	LATCH OPTION	K	TR
	-10, -20, -30, -40, -50	-3.00 = 3.00mm -3.50 = 3.50mm	-L = 10µ" (0,25µm) Gold on contact, Matte Tin on tail		-L = Latching (Leave blank for no latching) (Only available in -3.00 Lead Style)	(Required in callout) -K = (3,51mm) .138" DIA Polyimide Film Pick & Place Pad	(Required in callout) -TR = Tape & Reel

LEAD STYLE	A	B
-3.00	(2,85) .112	(3,50) .138
-3.50	(3,35) .132	(4,00) .157

4mm Stack Height	Rated @ -3dB Insertion Loss
Single-Ended Signaling	7.0 GHz / 14 Gbps
Differential Pair Signaling	4.5 GHz / 9 Gbps

Complete test data available at www.samtec.com?SS4, www.samtec.com?ST4 or contact sig@samtec.com

MATED HEIGHT



MATED HEIGHT*		
ST4 LEAD STYLE	SS4 LEAD STYLE	
	-3.00	-3.50
-1.00	(4,00) .157	(4,50) .177
-1.50	(4,50) .177	(5,00) .197
-2.50	(5,50) .217	(6,00) .236

*Processing conditions will affect mated height.

ST4	POSITIONS PER ROW	LEAD STYLE	PLATING OPTION	D	LATCH OPTION	P	TR
	-10, -20, -30, -40, -50	-1.00 = 1.00mm -1.50 = 1.50mm -2.50 = 2.50mm	-L = 10µ" (0,25µm) Gold on contact, Matte Tin on tail		-L = Latching (Leave blank for no latching) (Only available in -1.00 Lead Style)	(Required in callout) -P = Pick & Place Pad	(Required in callout) -TR = Tape & Reel

LEAD STYLE	A	B
-1.00	(1,00) .039	(3,08) .121
-1.50	(1,50) .059	(3,58) .141
-2.50	(2,50) .098	(4,58) .180

Note: -L latching option not intended for alignment to PCB. Automated placement is recommended.

Note: Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM