

**SURFACE MOUNT  
SCHOTTKY BARRIER DIODE**

**REVERSE VOLTAGE – 30 Volts  
FORWARD CURRENT – 0.2 Ampere**


**FEATURES**

- Extremely Fast Switching Speed
- Low Forward Voltage
- Very Small Conduction Losses

**MECHANICAL DATA**

- Case: SOT-23 Plastic
- Case Material: “Green” molding compound, UL flammability classification 94V-0, (No Br. Sb. Cl)
- Moisture Sensitivity: Level 1 per J-STD-020D
- Lead Free in RoHS 2002/95/EC Compliant

**SOT-23**

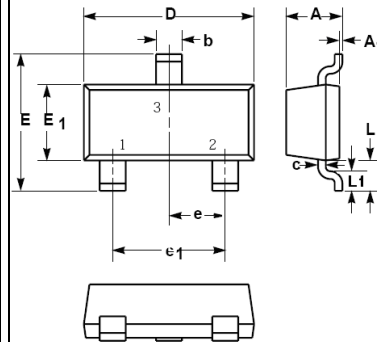

SOT-23		
Dim.	Min.	Max.
A	0.90	1.15
A1	0.00	0.10
b	0.30	0.50
c	0.08	0.15
D	2.80	3.00
E	2.25	2.55
E1	1.20	1.40
e	0.95 Typ.	
e1	1.80	2.00
L	0.55 Ref.	
L1	0.30	0.50
Dimensions in millimeter		

**Maximum Ratings & Thermal Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified**

Characteristic	Symbol	BAT54	BAT54A	BAT54C	BAT54S	Units
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	30				V
Working Peak Reverse Voltage	V <sub>RWM</sub>	30				V
DC Blocking Voltage	V <sub>R</sub>	30				V
Forward Continuous Current	I <sub>FM</sub>	200				mA
Forward Surge Current @t<1.0s	I <sub>FSM</sub>	600				mA
Power Dissipation	P <sub>D</sub>	200				mW
Operating Temperature Range	T <sub>J</sub>	125				°C
Storage Temperature Range	T <sub>STG</sub>	-55~+150				°C

**Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified**

Characteristic	Test Condition	Symbol	BAT54	BAT54A	BAT54C	BAT54S	Unit
Reverse Breakdown Voltage	I <sub>R</sub> = 100uA	V <sub>BR</sub>	30				V
Maximum Forward Voltage	I <sub>F</sub> = 0.1mA	V <sub>F</sub>	240				mV
	I <sub>F</sub> = 1mA		320				
	I <sub>F</sub> = 10mA		400				
	I <sub>F</sub> = 30mA		500				
	I <sub>F</sub> = 100mA		1000				
Maximum DC Reverse Current at Rated DC Blocking Voltage	V <sub>R</sub> = 25V	I <sub>R</sub>	2				uA
Typical Diode Capacitance	V <sub>R</sub> = 1.0V, f=1MHz	C <sub>D</sub>	10				pF
Reverse Recovery time	I <sub>rr</sub> =1mA, I <sub>R</sub> =I <sub>F</sub> =10mA, R <sub>L</sub> =100Ω	trr	5				nS

# RATING AND CHARACTERISTIC CURVES BAT54, BAT54A / C / S



FIG.1- TYPICAL FORWARD CHARACTERISTICS

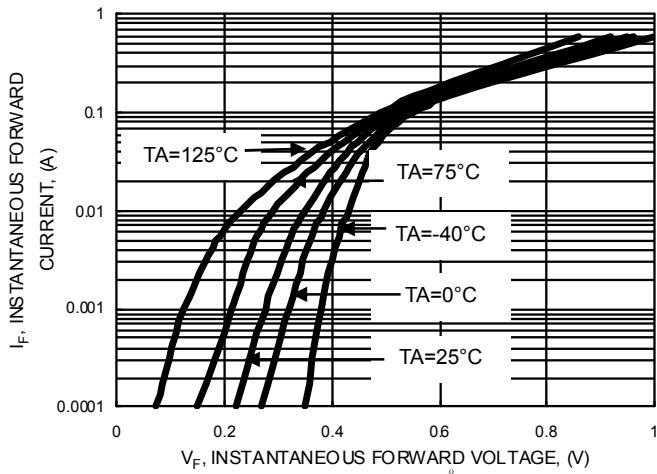


FIG.2- TYPICAL REVERSE CHARACTERISTICS

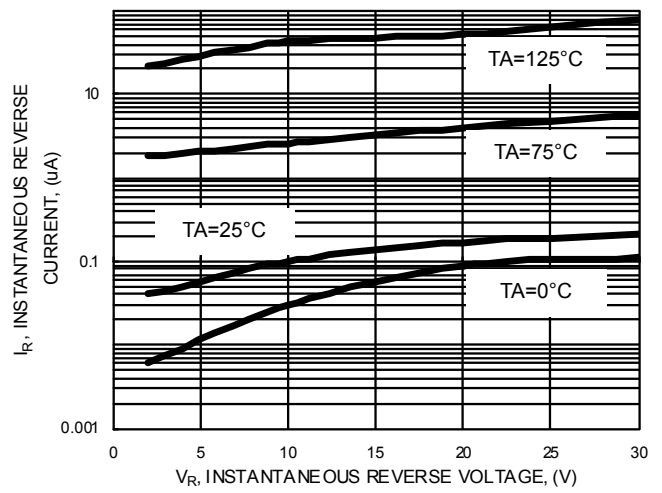


FIG.3- TYPICAL JUNCTION CAPACITANCE


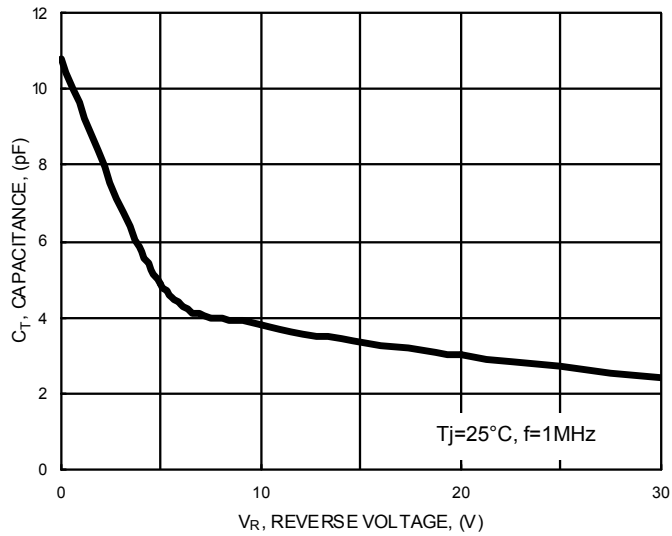


FIG.4- POWER DERATING CURVE

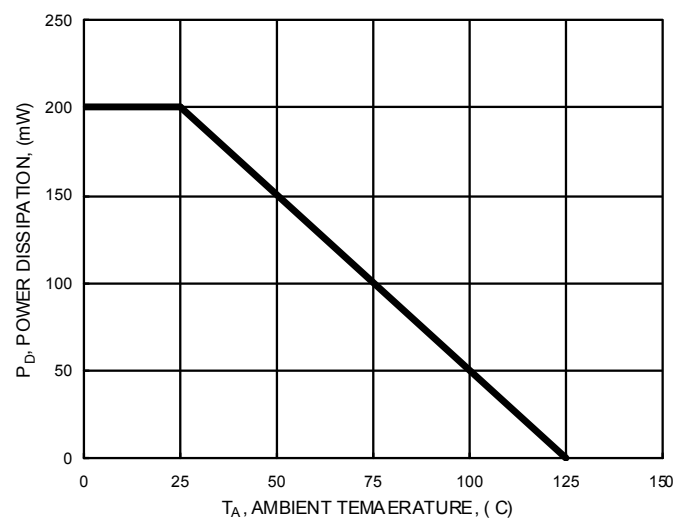

## Device Marking :

Device P/N	Marking	Equivalent Circuit Diagram
BAT54	KL1	
BAT54A	KL2	
BAT54C	KL3	
BAT54S	KL4	

## **Important Notice and Disclaimer**

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.