


Applications

- Audio/Video line
- Network and telecom
- Data lines and security systems
- Serial ports


Surge & ESD Protection Device

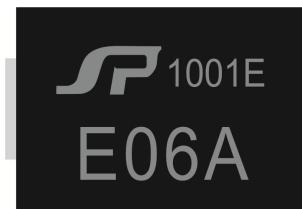

Features

- IEC 61000-4-2 (ESD) $\pm 15\text{kV}$ (air), $\pm 8\text{kV}$ (contact)
- IEC 61000-4-5 (SURGE) 10/700us $>2\text{KV}$ $V_c<20\text{V}$
- Low protection voltage
- Fast response time
- Bi-directional protection device
- High temperature soldering guaranteed: 260°C / 10 seconds at terminals
- RoHS compliance

Package

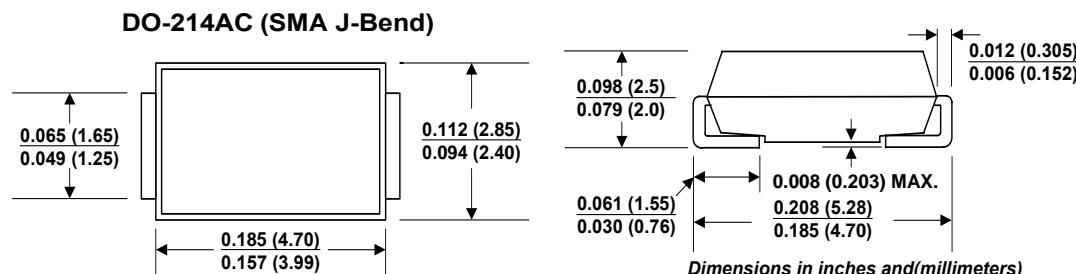


Maximum Ratings ($T_{Ambient}=25^\circ\text{C}$ unless noted otherwise)

Rating	Symbol	Value	Units
Termal Resistance:Junction to Ambient	R_{BJA}	90	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	-40 to +150	$^\circ\text{C}$
Storage Temperature Range	T_S	-65 to +150	$^\circ\text{C}$


Electrical Characteristics ($T_{Ambient}=25^\circ\text{C}$ unless noted otherwise)

Symbol	Min.	Typ.	Max.	Unit	Conditions
V_{RWM} Reverse Working Voltage		6.5		V	
V_{BR} Reverse Breakdown Voltage	8.0		15	V	$I_T=1\text{mA}$
I_R Reverse Leakage Current			3	μA	$V_{RWM}=6.5\text{V}$
I_H Hold Current	50		400	mA	
C_J Junction Capacitance		70		pF	2V,1MHz


Typical application circuit

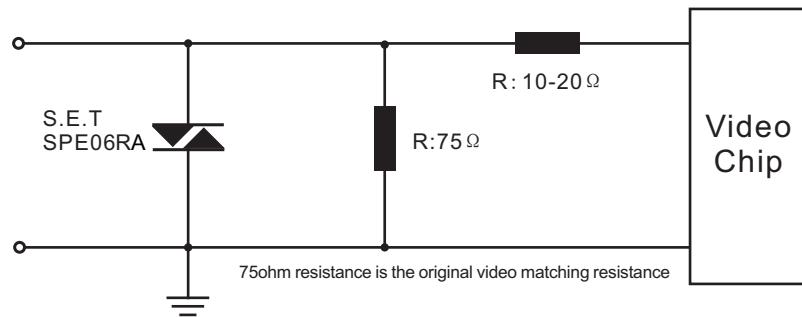

Typical Characteristics Curves

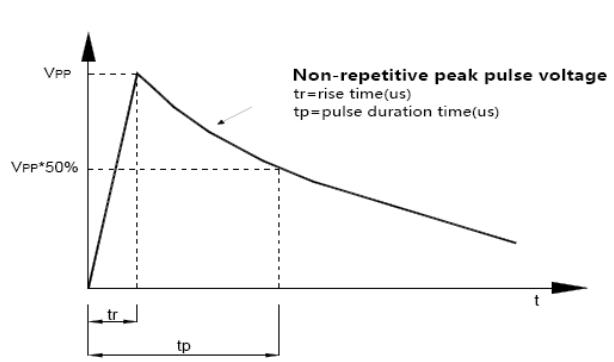


Pulse Waveform

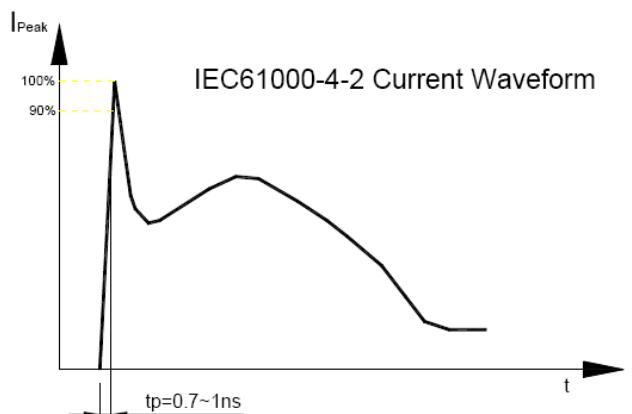

ESD Discharge IEC61000-4-2 Current Waveform



Power Derating Curve

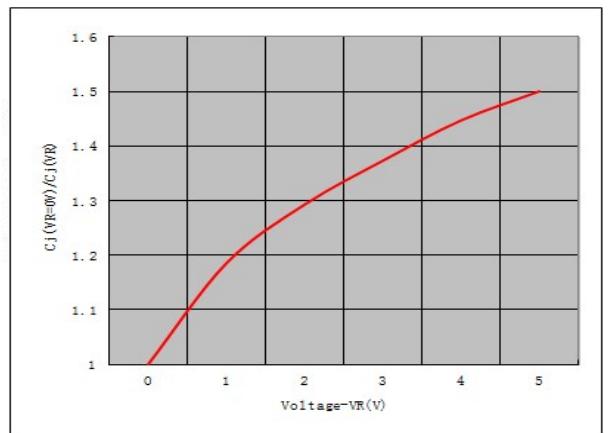

Junction Capacitance vs. Reverse Voltage