



America Semiconductor

**Silicon Standard
Recovery Diode**

**MSRTA30020(A) thru
MSRTA30060(A)**

$V_{RRM} = 200\text{ V} - 1600\text{ V}$

$I_F = 300\text{ A}$

Features

- High Surge Capability
- Types up to 1600 V V_{RRM}

Heavy Three Tower Package



Maximum ratings, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	MSRTA30020(A)	MSRTA30040(A)	MSRTA30060(A)	Unit
Repetitive peak reverse voltage	V_{RRM}		200	400	600	V
DC blocking voltage	V_{DC}		200	400	600	V
Continuous forward current	I_F	$T_C \leq 100\text{ }^\circ\text{C}$	300	300	300	A
Surge non-repetitive forward current, Half Sine Wave	$I_{F,SM}$	$T_C = 25\text{ }^\circ\text{C}$, $t_p = 8.3\text{ ms}$	3800	3800	3800	A
Operating temperature	T_j		-40 to 175	-40 to 175	-40 to 175	$^\circ\text{C}$
Storage temperature	T_{stg}		-40 to 175	-40 to 175	-40 to 175	$^\circ\text{C}$

Electrical characteristics, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	MSRTA30020(A)	MSRTA30040(A)	MSRTA30060(A)	Unit
Diode forward voltage	V_F	$I_F = 300\text{ A}$, $T_j = 25\text{ }^\circ\text{C}$	1.1	1.1	1.1	V
Reverse current	I_R	$V_R = 200\text{ V}$, $T_j = 25\text{ }^\circ\text{C}$	25	25	20	μA
		$V_R = 200\text{ V}$, $T_j = 150\text{ }^\circ\text{C}$	10	10	10	mA

Thermal characteristics

Thermal resistance, junction - case	R_{thJC}		0.28	0.28	0.28	$^\circ\text{C/W}$
-------------------------------------	------------	--	------	------	------	--------------------





America Semiconductor

MSRTA30020(A) thru MSRTA30060(A)

Figure.1 Typical Forward Characteristics

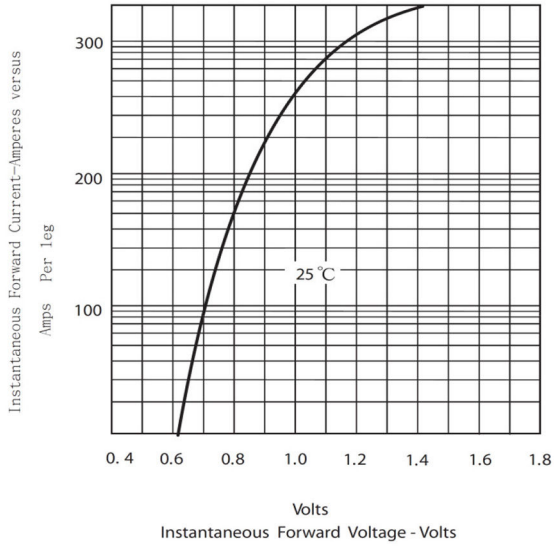


Figure.2 Forward Derating Curve

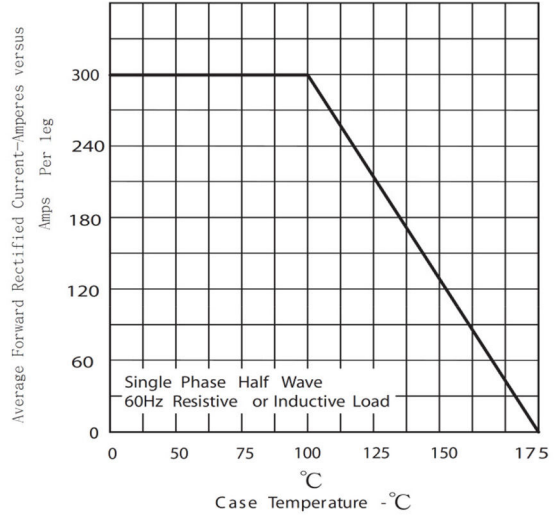


Figure.3-Peak Forward Surge Current

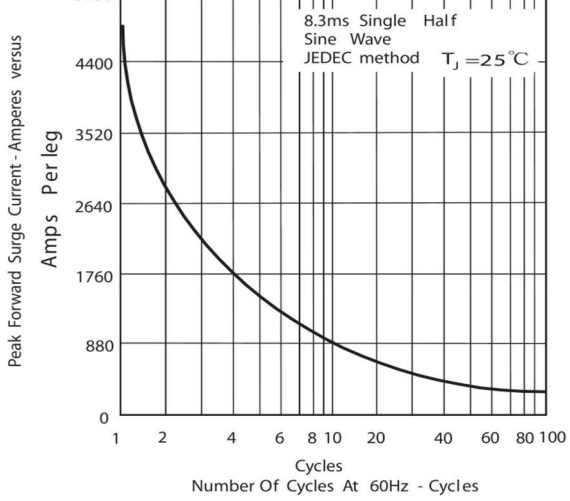


Figure .4 -Typical Reverse Characteristics

