

## Three Phase Rectifier Bridge

## PSD 35T


Preliminary Data Sheet

$$I_{dAVM} = 38 \text{ A}$$

$$V_{RRM} = 800 \text{ V to } 2000 \text{ V}$$



$V_{RSM}$ V	$V_{RRM}$ V	Type Number
800	800	PSD 35T/08
1200	1200	PSD 35T/12
1400	1400	PSD 35T/14
1600	1600	PSD 35T/16
1800	1800	PSD 35T/18
2000	2000	PSD 35T/20

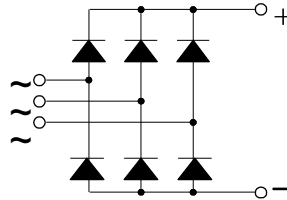

Symbol	Test Conditions	Maximum Ratings
$I_{dAVM}$	$T_c = 85^\circ\text{C}$ per module	38 A
$I_{FSM}$	$T_{vj} = 45^\circ\text{C}, V_R = 0 \text{ V}$	$t = 10 \text{ ms}$ 50 Hz, sine 400 A
		$t = 8.3 \text{ ms}$ 60 Hz, sine 440 A
	$T_{vj} = T_{vjM}, V_R = 0 \text{ V}$	$t = 10 \text{ ms}$ 50 Hz, sine 360 A
		$t = 8.3 \text{ ms}$ 60 Hz, sine 400 A
$\int j^2 dt$	$T_{vj} = 45^\circ\text{C}, V_R = 0 \text{ V}$	$t = 10 \text{ ms}$ 50 Hz, sine 800 A <sup>2</sup> s
		$t = 8.3 \text{ ms}$ 60 Hz, sine 810 A <sup>2</sup> s
	$T_{vj} = T_{vjM}, V_R = 0 \text{ V}$	$t = 10 \text{ ms}$ 50 Hz, sine 650 A <sup>2</sup> s
		$t = 8.3 \text{ ms}$ 60 Hz, sine 670 A <sup>2</sup> s
$T_{vj}$		-40 ... +150 °C
$T_{vjM}$		150 °C
$T_{stg}$		-40 ... +150 °C
$V_{isol}$	50/60 Hz, RMS	$t = 1 \text{ min}$ 2500 V~
	$I_{isol} \leq 1 \text{ mA}$	$t = 1 \text{ s}$ 3000 V~
$M_d$	Mounting torque (M4)	1.5 Nm
	Terminal connection torque (M4)	1.5 Nm
Weight	typ.	110 g

### Features

- Package with screw terminals
- Isolation voltage 3000 V~
- Mesa glass-passivated chips
- Blocking voltage up to 2000 V
- Low forward voltage drop
- UL registered E 148688


### Applications

- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

### Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling capability

### Package style and outline

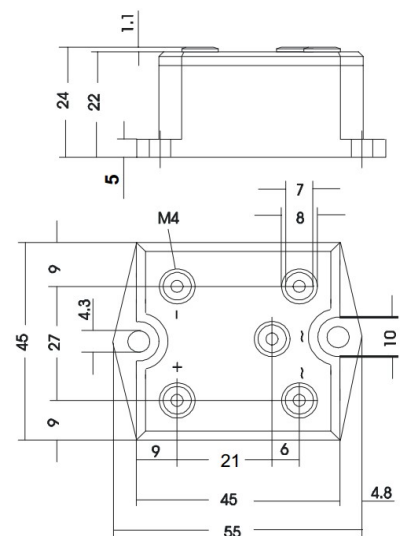

Dimensions in mm (1mm = 0.0394")

Symbol	Test Conditions	Characteristic Value
$I_R$	$V_R = V_{RRM}$ $T_{vj} = 25^\circ\text{C}$	$\leq 0.3 \text{ mA}$
	$V_R = V_{RRM}$ $T_{vj} = T_{vjM}$	$\leq 5.0 \text{ mA}$
$V_F$	$I_F = 150 \text{ A}$ $T_{vj} = 25^\circ\text{C}$	$\leq 2.2 \text{ V}$
$V_{TO}$	For power-loss calculations only	0.85 V
$r_T$	$T_{vj} = T_{vjM}$	12 mΩ
$R_{th(j-c)}$	per diode; DC current	4.2 K/W
	per module	0.7 K/W
$R_{th(j-s)}$	per diode; DC current	4.8 K/W
	per module	0.8 K/W
$d_s$	Creeping distance on surface	6.2 mm
$d_A$	Creeping distance on air	6.2 mm
$a$	Maximum allowable acceleration	50 m/s <sup>2</sup>