


**4 Positions-Female (molding type)**

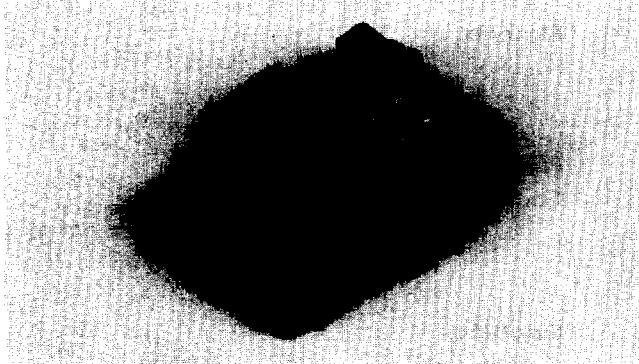

**Specifications**

**Material**

Housing: Thermoplastic, UL94V-0  
 Insert: Thermoplastic, UL94-V-0  
 Contact: Phosphor Bronze

**Plating**

Contact: Under-plated nickel all over  
 plate Tin/Lead in tail zone, plate gold  
 over Pd/Ni in contact area.

**Ordering Information**

**ASPP004M**

**Electrical**

Current rating: 0.5A  
 Voltage rating: 100 VAC  
 Dielectric withstanding voltage: 1000VAC  
 Insulation resistance: 1000 Mega ohms  
 Contact resistance: 40 Milli ohms

**Environmental**

Operating temperature: -10°C to 70°C  
 Storage temperature: -40°C to 70°C

