


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

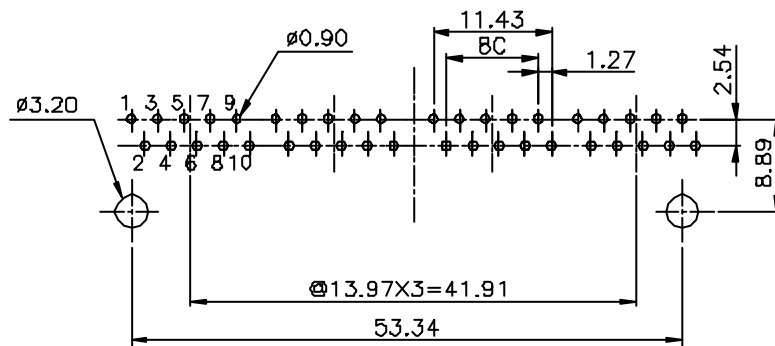

PC Board Layout t=1.6mm  
Component Side Shown

**NOTES:**

**ELECTRICAL:**

- VOLTAGE RATING: 125 VAC RMS.
- CURRENT RATING: 1.5 AMP.
- CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH: 1000 VAC RMS 60Hz, 1MIN.

**MECHANICAL:**

- HOUSING MATERIAL: GLASS FILLED POLYESTER UL 94V-0. COLOR-YELLOW
- CONTACT MATERIAL: PHOSPHOR BRONZE 0.46mm.
- PLATING: GOLD PLATING OVER NICKEL.
- OPERATING LIFE: 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER: 1 LB MIN
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

**ENVIRONMENTAL:**

- STORAGE: -40°C TO +85°C.
  - OPERATION: -40°C TO +85°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

CUL FILE NO. E163191  
PART NUMBER: E560X-00CW6X

NO. OF CONTACT  
8-8 CONTACTS  
1- 10 CONTACTS

1- 3u" 2- 6u" 3-15u"  
4-30u" 5-50u" 6-Pd20u"

DETACHED LETTERS	MM (INCH)	DFTD RIK	DATE 11/04/03	FULL RISE ELECTRONIC CO., LTD
	TOLERANCES EXCEPT AS NOTED	CHKD MNB-WEI	DATE 11/04/03	
	MM	WFD LWW	DATE 11/04/03	
	MM	APPLY YUAN	DATE 11/04/03	
∅ ± 0.2	±	MATERIAL :	TITLE 11.5 SIDE ENTRY PCB GANG JACK 10P	
∅ ± 0.15	±	QTY :	DRAWING NO. GE563A84	
∅ ± 0.075	±	FINISH	/PART NO. SEE NOTE	
ANGLES ± 0.5	±	SCALE : 2:1	DO NOT SCALE DRAWING	
THIRD ANGLE PROJECTION			SHEET 1 OF 1	