
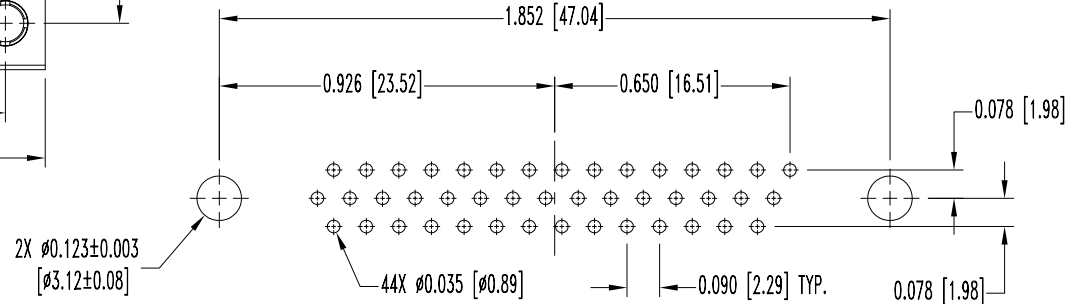
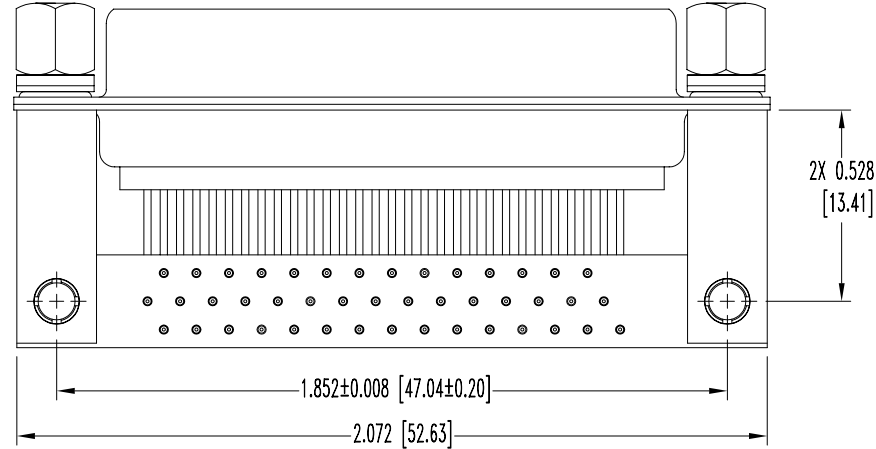
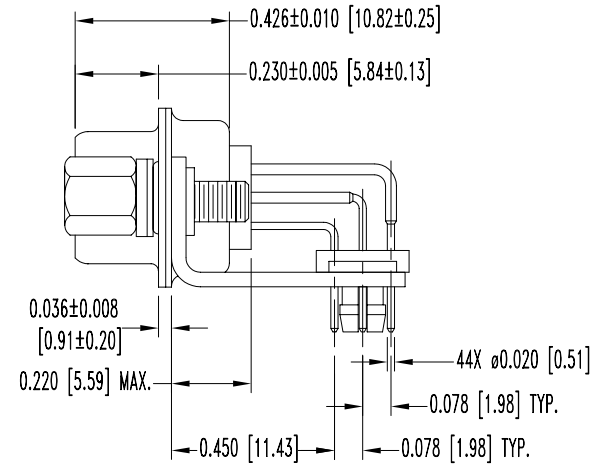


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
4-3-07	NC	ECO 27720		YK	

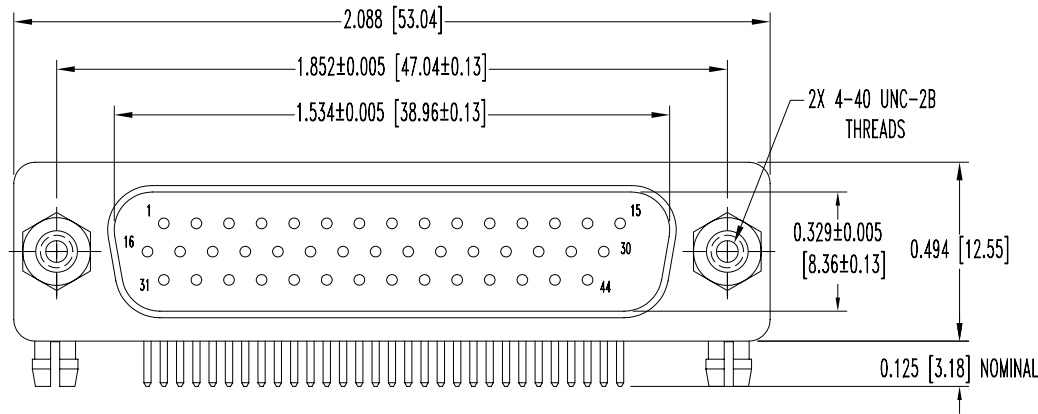

CONTACT HOLE PATTERN

NOTES:

1. MATERIALS AND FINISHES:

- INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519, UL 94V-0, BLACK COLOR.
- CONTACTS: PRECISION MACHINED BRASS, GOLD FLASH OVER NICKEL FINISH.
- SHELLS: STAINLESS STEEL, PASSIVATED.
- JACKSCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
- ANGLE BRACKET: BRASS, ZINC PLATE WITH CHROMATE SEAL.
- THREADED RIVET: BRASS, ZINC PLATE WITH CHROMATE SEAL.
- ALIGNMENT BAR: GLASS FILLED NYLON, BLACK.
- PUSH-ON FASTENERS: BERYLLIUM COPPER, TIN PLATE.
- WASHERS: STAINLESS STEEL, PASSIVATED.

2. ELECTRICAL CHARACTERISTICS:

- CONTACT CURRENT RATING: 5 AMPERES NOMINAL.
- INITIAL CONTACT RESISTANCE: 0.010 OHMS MAXIMUM.
- INSULATOR RESISTANCE: 5 G OHMS.
- WORKING VOLTAGE: 300 V r.m.s.

3. TEMPERATURE RANGE: -55°C TO +125°C.

5. DIMENSIONS ARE IN INCHES [MILLIMETERS].

 <b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com		FSCM 28198	
 DECIMAL TOL. ± 0.015 [0.38]	ODD SERIES	SCALE N.T.S.	DRAWN BY YK
TITLE <b>ODD44M5R7NT2S</b>		APPROVED BY	
ANGULAR TOL. ± 5°	DATE 4-3-07	DRAWING NUMBER SK8451	REV. NC