

## Features & Benefits


- General purpose model
- Stable power with a flat discharge voltage
- High safety performance
- Ideal for portable communications, portable computing, and robotics.

## Specifications

Rated capacity <sup>(1)</sup>	Min. 1850mAh
Capacity <sup>(2)</sup>	Min. 1900mAh Typ. 2000mAh
Nominal voltage	3.7V
Charging	CC-CV, Std. 1330mA, 4.20V, 3.0 hrs
Weight (max.)	44.3 g
Temperature	Charge: 0 to +45°C Discharge: -20 to +60°C Storage: -20 to +50°C
Energy density <sup>(3)</sup>	Volumetric: 411 Wh/l Gravimetric: 158 Wh/kg


<sup>(1)</sup> At 20°C <sup>(2)</sup> At 25°C <sup>(3)</sup> Energy density based on bare cell dimensions

## Dimensions

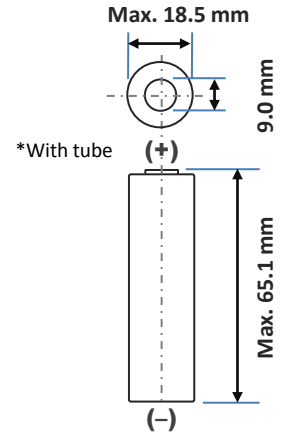


For Reference Only


## Charge Characteristics

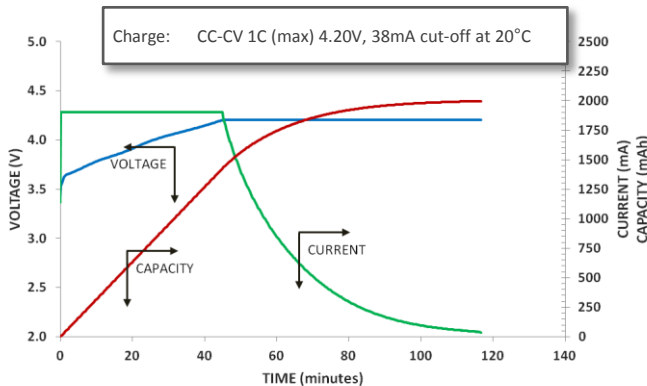


## Cycle Life Characteristics

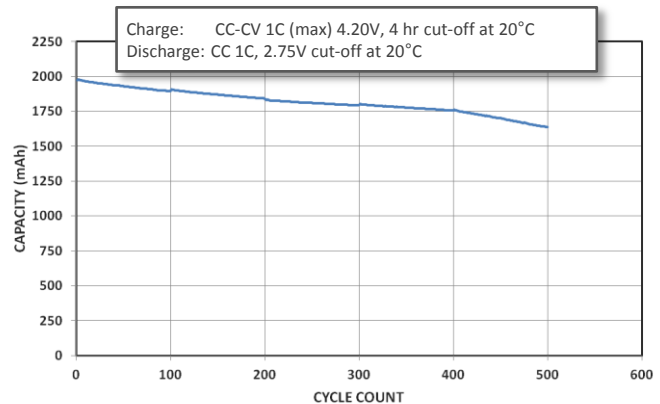

## Discharge Characteristics (by temperature)

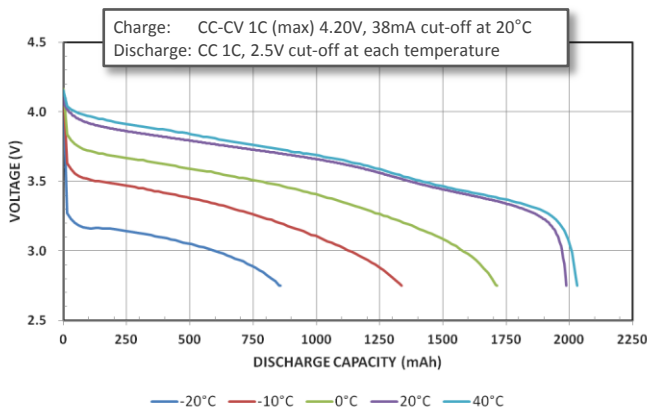

## Discharge Characteristics (by rate of discharge)

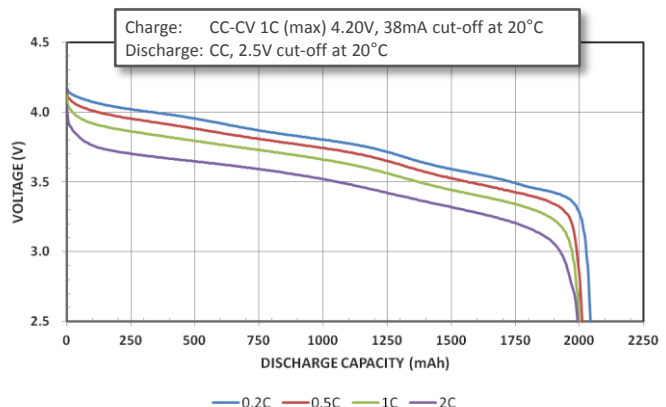

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.

For more information on how Panasonic can assist you with your battery power solution needs, visit us at [www.panasonic.com/industrial/batteries-oem](http://www.panasonic.com/industrial/batteries-oem) or e-mail [secsales@us.panasonic.com](mailto:secsales@us.panasonic.com).