



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

MBR870 Thru MBR8100

Features

- High Current Capability, Low VF
- Low Power Loss, High Efficiency
- Guard Ring for Transient Protection
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Marking : type number

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +175°C
- Maximum Thermal Resistance: $R_{\theta JC} = 2.0^{\circ}\text{C/W}$ junction to case

MCC Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MBR870	70V	49V	70V
MBR880	80V	56V	80V
MBR890	90V	63V	90V
MBR8100	100V	70V	100V


Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	8A	$T_C = 110^{\circ}\text{C}$
Peak Forward Surge Current	I_{FSM}	125A	8.3ms, half sine
Voltage Rate of Change	dv/dt	10000	Rated V_R
Maximum Instantaneous Forward Voltage	V_F	.85V .75V .95V .85V	$I_{FM} = 8A @ T_J = 25^{\circ}\text{C}$ $I_{FM} = 8A @ T_J = 125^{\circ}\text{C}$ $I_{FM} = 16A @ T_J = 25^{\circ}\text{C}$ $I_{FM} = 16A @ T_J = 125^{\circ}\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	0.15mA 100mA	$T_J = 25^{\circ}\text{C}$ $T_J = 125^{\circ}\text{C}$
Typical Junction Capacitance	C_J	280pF	Measured at 1.0MHz, $V_R=4.0V$

*Pulse Test: Pulse Width 300µsec, Duty Cycle 2%

8 Amp Schottky Rectifier 70-100 Volts

TO-220AC

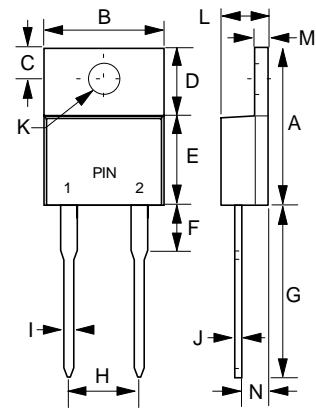

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.560	.625	14.22	15.88	
B	.380	.420	9.65	10.67	
C	.100	.135	2.54	3.43	
D	.230	.270	5.84	6.86	
E	.380	.420	9.65	10.67	
F	-----	.250	-----	6.35	
G	.500	.580	12.70	14.73	
H	.190	.210	4.83	5.33	
I	.020	.045	0.51	1.14	
J	.012	.025	0.30	0.64	
K	.139	.161	3.53	4.09	∅
L	.140	.190	3.56	4.83	
M	.045	.055	1.14	1.40	
N	.080	.115	2.03	2.92	

MBR870 THRU MBR8100

FIG.1 - FORWARD CURRENT DERATING CURVE

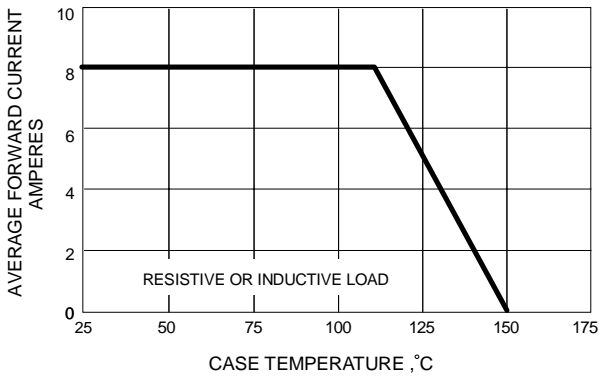


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

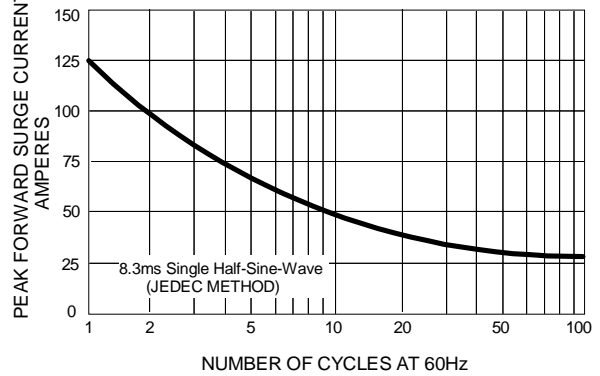


FIG.3 - TYPICAL REVERSE CHARACTERISTICS

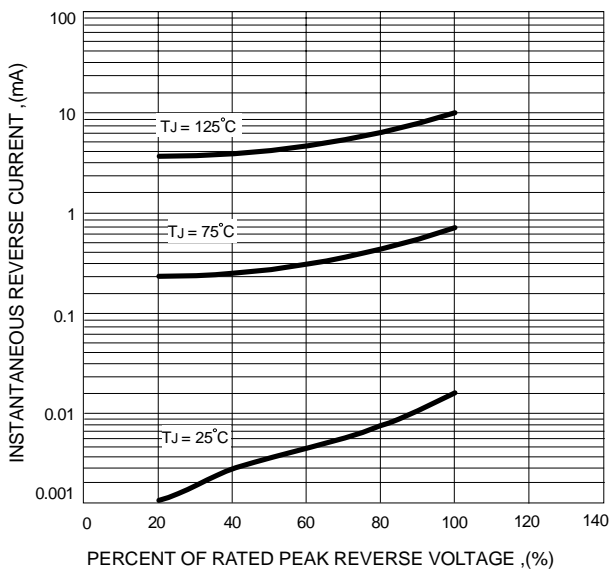


FIG.4 - TYPICAL FORWARD CHARACTERISTICS


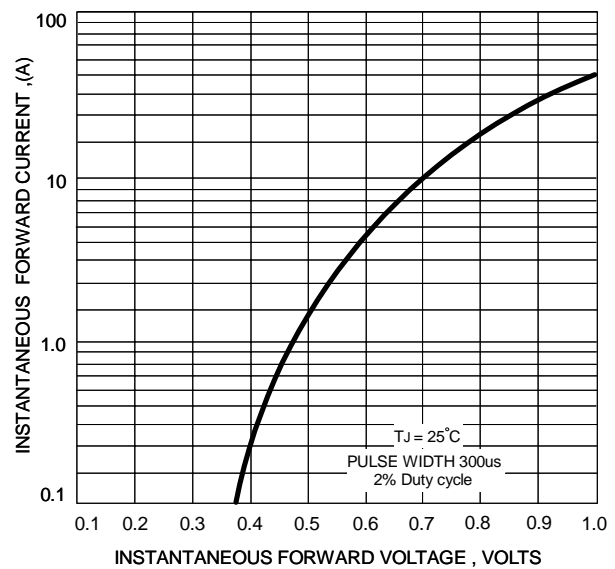


FIG.5 - TYPICAL JUNCTION CAPACITANCE



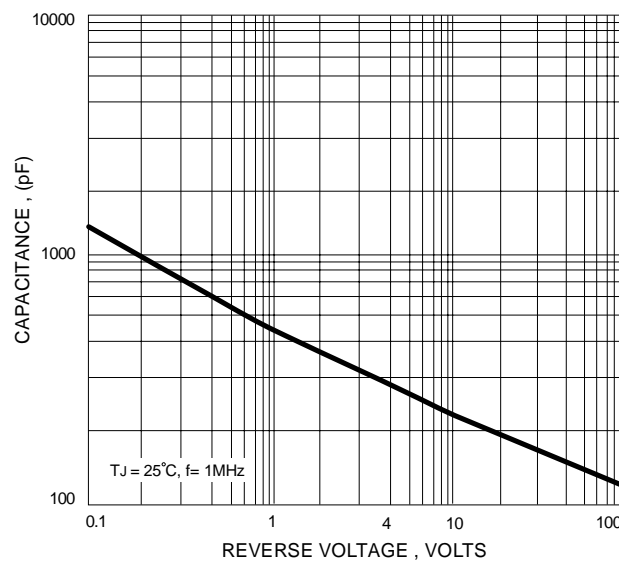

TM

Micro Commercial Components

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.