


A

15.00

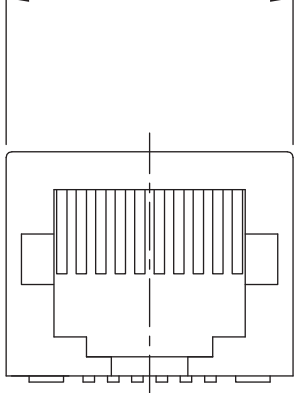


B

17.00

2.10±0.25

11.60

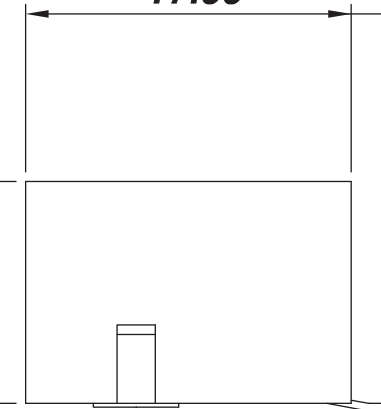


C

D

1.80

5.77

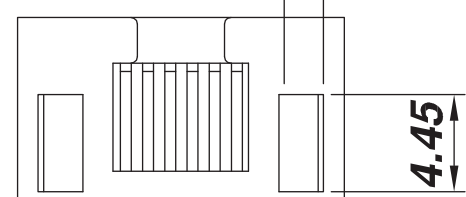

E

4.45

3.50 6.35

1.27

3.00


16.89

5.20 8.52


1 2 3 4 5 6

0.80

2.54

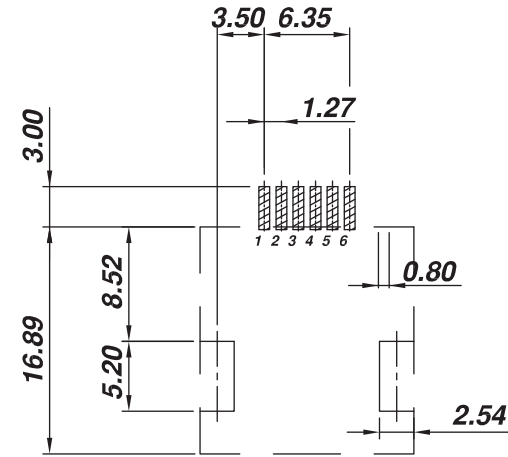

F



**Material:**

- Housing: Nylon (UL94V-0)
- Contacts: Phosphor Bronze
- Operating Temperature: -40°~+85°C

**Electrical:**

- Current Rating: 1.5A max.
- Voltage Rating: 120V AC

G

Scale	1:1						Name	Item No.
TOLERANCE						Drawn	12.21.11	<b>A-2004-2-4-LP/SMT-B-R</b>
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							Title
								Modular Jack - SMT Side by Side Stackable, for PCB Mount, Low Profile, 8P/8C, 6µ" Gold plating
								Drawing No.
								Replace
								Sheet



H

A

B

C

D

E

F

G

H

rev00