

RF AMPLIFIER

MODEL *TM9125*

Available as: TM9125, 4 Pin TO-8 (T4)
 TN9125, 4 Pin Surface Mount (SM3)
 FP9125, 4 Pin Flatpack (FP4)
 BX9125, Connectorized Housing (H1)

Features

- Medium Gain: 10.5 dB Typical
- Medium Output Power: +8 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10 - 1500 MHz	10 - 1500 MHz
Gain (dB)	10.5	9.0 Min.
Power @ 1 dB Comp. (dBm)	+8	+7 Min.
Reverse Isolation (dB)	-15	-14 Max.
VSWR In Out	<1.5:1 <1.75:1	2.0:1 Max. 2.0:1 Max.
Noise Figure (dB)	<4.5	6.0 Max.
Power Vdc mA	+15 24	+15 27 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point.....+39 dBm (Typ.)
 Second Order Two Tone Intercept Point.....+33 dBm (Typ.)
 Third Order Two Tone Intercept Point.....+21 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power..... 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power..... 0.5 Watt (3 µsec Max.)

Typical Performance Data

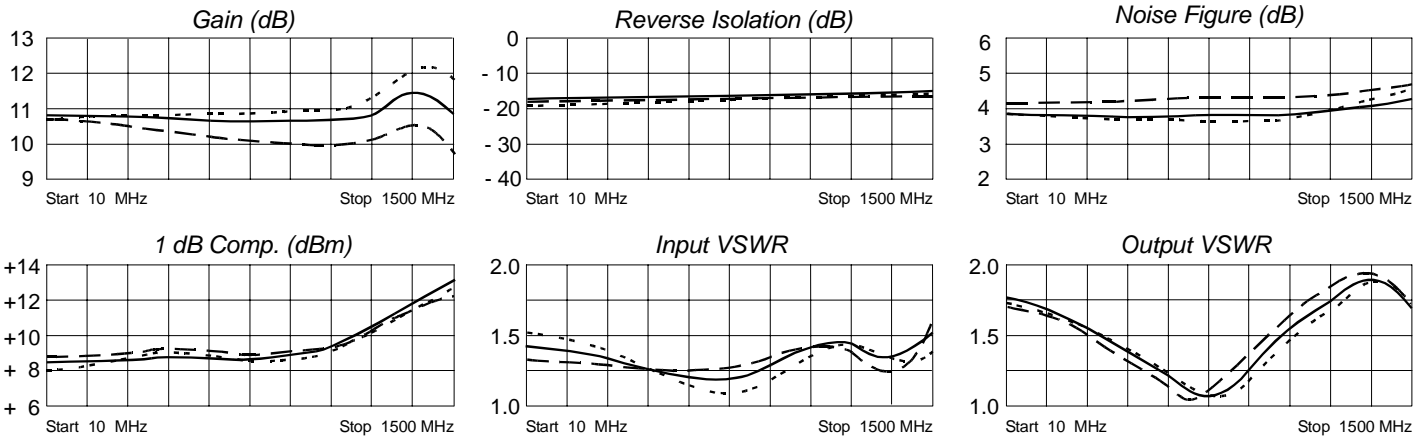

Legend ——— + 25 °C - - - + 85 °C ····· -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
10	.20	-176	3.61	-180	.13	2	.29	-177
100	.19	173	3.61	167	.13	- 2	.28	170
250	.17	163	3.58	147	.13	- 6	.25	152
500	.11	155	3.48	114	.14	-14	.16	131
750	.06	174	3.40	82	.14	-22	.06	146
1000	.09	-132	3.34	47	.15	-35	.14	-156
1250	.09	-173	3.49	11	.15	-50	.22	-179
1500	.24	9	3.60	- 48	.16	-76	.16	160



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 07/21/04

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001