

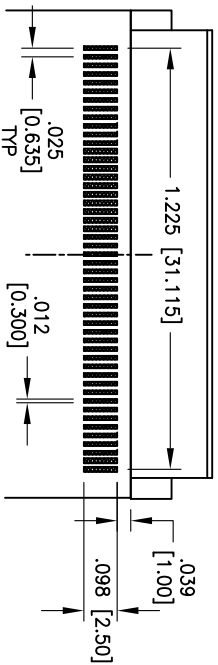
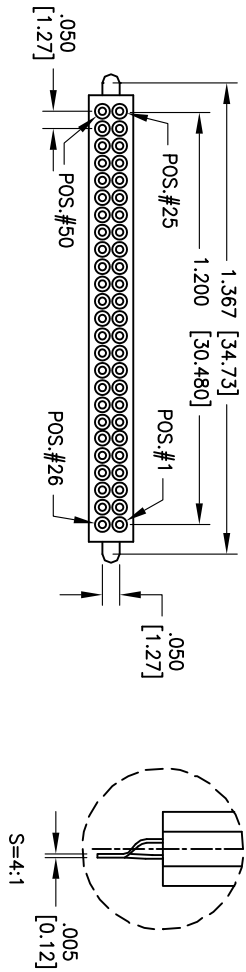


Rev	AWO #	Description	Date	Appr
-	9899	RELEASED	12/07/09	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

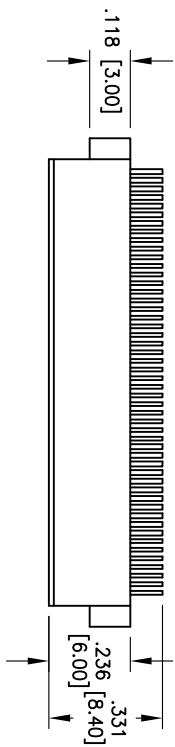

RECOMMENDED PCB LAYOUT

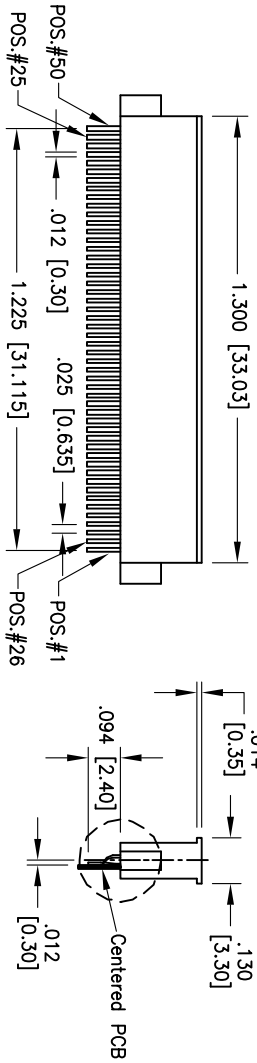

**SPECIFICATIONS:**  
 Material: \_\_\_\_\_  
 Insulator: High Temp Thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Contact: Copper Alloy  
 Grounding Plate: Copper Alloy  
 Plating: \_\_\_\_\_  
 10u" Gold over Nickel underplate on contact area.  
 Electrical: \_\_\_\_\_  
 Current rating: 0.5 Amps max  
 Dielectric withstanding voltage: 500 VAC for 1 minute.  
 Temperature Rating: \_\_\_\_\_  
 Operating temperature: -10°C to +70°C  
 Environmental: \_\_\_\_\_  
 Lead free, RoHS Compliant.  
 Recommended soldering Temp: 260°C for 5 sec.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
INCHES	MM
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	12/07/09
APPROVED	

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: COMPACT FLASH SOCKET, 50 POSITION  
 VERTICAL, SMT, 0.3mm CL OFF-SET  
 SIZE: PART NO.: CFS-50-A-SMT-B  
 REF: S0008T SCALE: NTS SHEET 1 OF 1