

Toshiba Matsushita Display Technology Co., Ltd

PRODUCT INFORMATION

18cm COLOUR TFT-LCD MODULE

(7 TYPE)

LT070AC46000

(p-Si TFT)

All information is subject to change without notice. Please read bottom notes.

FEATURES:(1)7" WVGA color display with High Luminance (300cd/m²)
 (2)Wide Viewing Angle(No Color Inversion)
 (3)LED Back Light(25,000 hours MTTF)
 (4)LED Unit Replaceable Structure

TENTATIVE

RoHS compatible

MECHANICAL SPECIFICATIONS

Item	Specifications
Dimensional Outline (typ.)	167.0(W) x 106.0max(H) x 7.6(D) mm
Number of Pixels	800(W) x 480(H) pixels
Active Area	152.4(W) x 91.44(H) mm
Pixel Pitch	0.1905(W) x 0.1905(H)
Weight (approximately)	(200g)
Backlight	LED, Sidelight type

ABSOLUTE MAXIMUM RATINGS

Item	Min.	Max.	Unit	
Supply Voltage	(V _{DD})	-0.3	4.0	V
	(V _{LED})	0	TBD	V
Input Signal Voltage (V _{IN})	-0.3	V _{DD} +0.3	V	
Operating Temperature (Note)	-15	60	°C	
Storage Temperature	-30	80	°C	
Storage Humidity (Max. wet bulb temperature = 39°C)	10	90	%(RH)	

Note) Only operation is guaranteed at Operating Temperature. Display quality is evaluated at +25°C.

ELECTRICAL SPECIFICATION (T_a=25°C) (RECOMMENDED OPERATION CONDITION)

Item	Min.	Typ.	Max.	Unit	Remarks	
Supply Voltage	(V _{DD})	3.0	3.3	3.6	V	
	(V _{LED})	0	---	TBD	V	
Common Mode Input Voltage	(V _{CM})	1.0	---	2.0	V	
Differential Input Amplitude	(V _{IA})	0.25	---	0.45	V	
Differential Input Voltage	(V _{ID})	V _{CM} - (V _{IA})/2		V _{CM} + (V _{IA})/2		
H Level Voltage	(V _{IH})	2.2		V _{DD}	V	
L Level Voltage	(V _{IL})	0		0.7	V	
Current Consumption	*1 (I _{DD})	---	TBD	TBD	mA	
	*2 (I _{LED})	---	15.0	---	mA	
Power Consumption	---	(2.22)	---	W	I _{LED} =15.0mA	

*1 : 8 color bars pattern

OPTICAL SPECIFICATION (T_a=25°C)

Item	Min.	Typ.	Max.	Unit	Remarks
Contrast Ratio (CR)	TBD	400	---	---	
Viewing Angle (CR ≥ 10)	(Upper / Lower)	TBD	(85) / (85)	---	°
	(Left / Right)	TBD	(85) / (85)	---	°
Response Time	---	(30)		ms	
Luminance	TBD	300	---	cd/m ²	I _{LED} =15.0mA
White Chromaticity	W _x		TBD		
	W _y		TBD		
Color Saturation		45		%	
LED Life Time (MTBF)*3 *4		25,000		hour	

*3 : Conditions ; T_a=25°C, I_{FL}=15.0mA(rms), continuous lighting

*4 : Definitions of failure ; 1) Lcd luminance becomes half of the minimum value. 2) LED doesn't light normally.


*The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Toshiba Matsushita Display Technology or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Toshiba Matsushita Display Technology or others.

*The information contained herein may be changed without prior notice. It is therefore advisable to contact Toshiba Matsushita Display Technology before proceeding with the design of equipment incorporating this product.

DIMENSIONAL OUTLINE
(Front)


TENTATIVE

Unit : mm

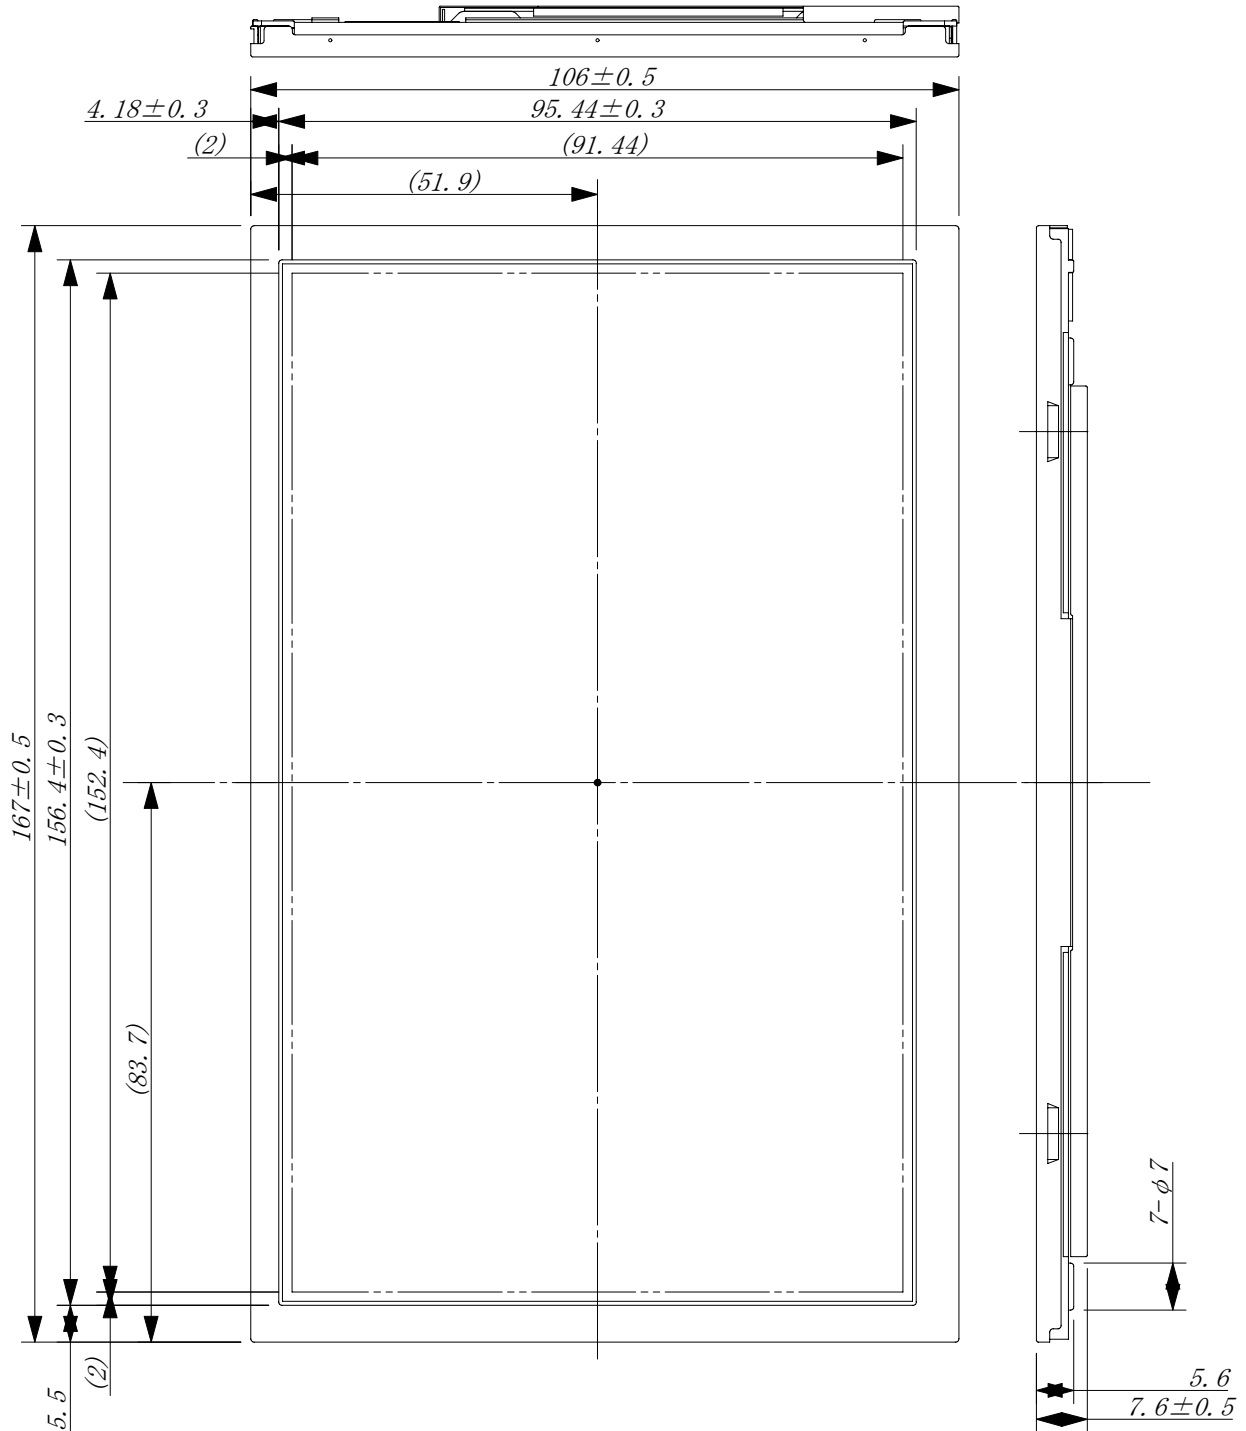
Standard tolerance : ± 0.5 

(Rear)


Unit : mm

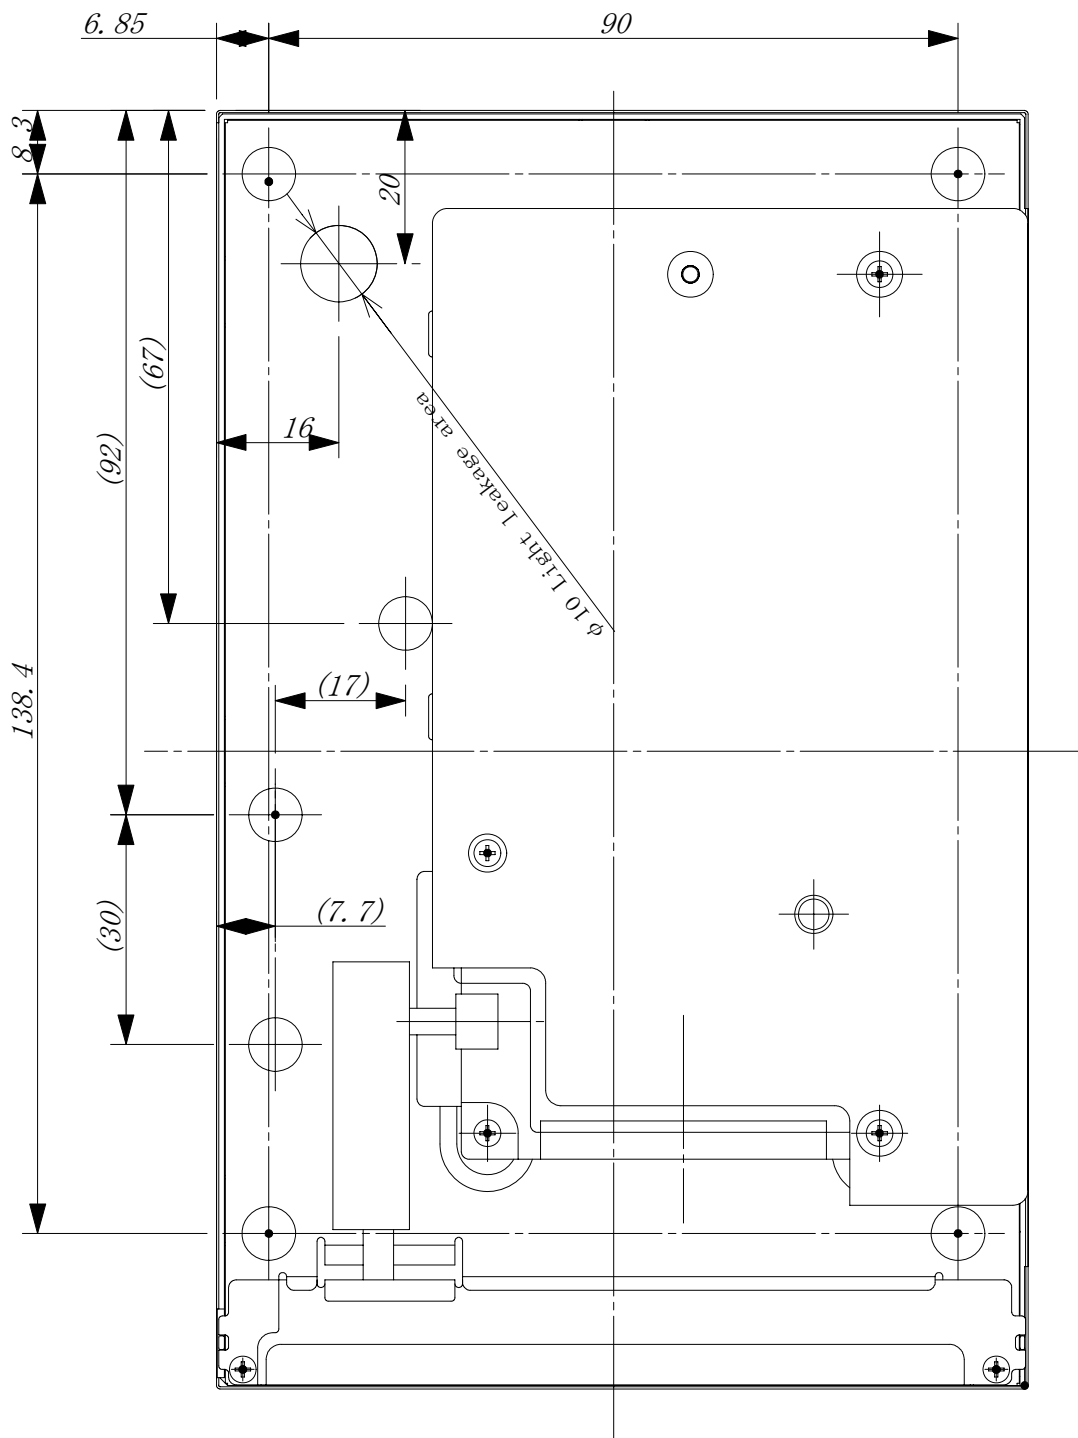Standard tolerance : ± 0.5 


BLOCK DIAGRAM

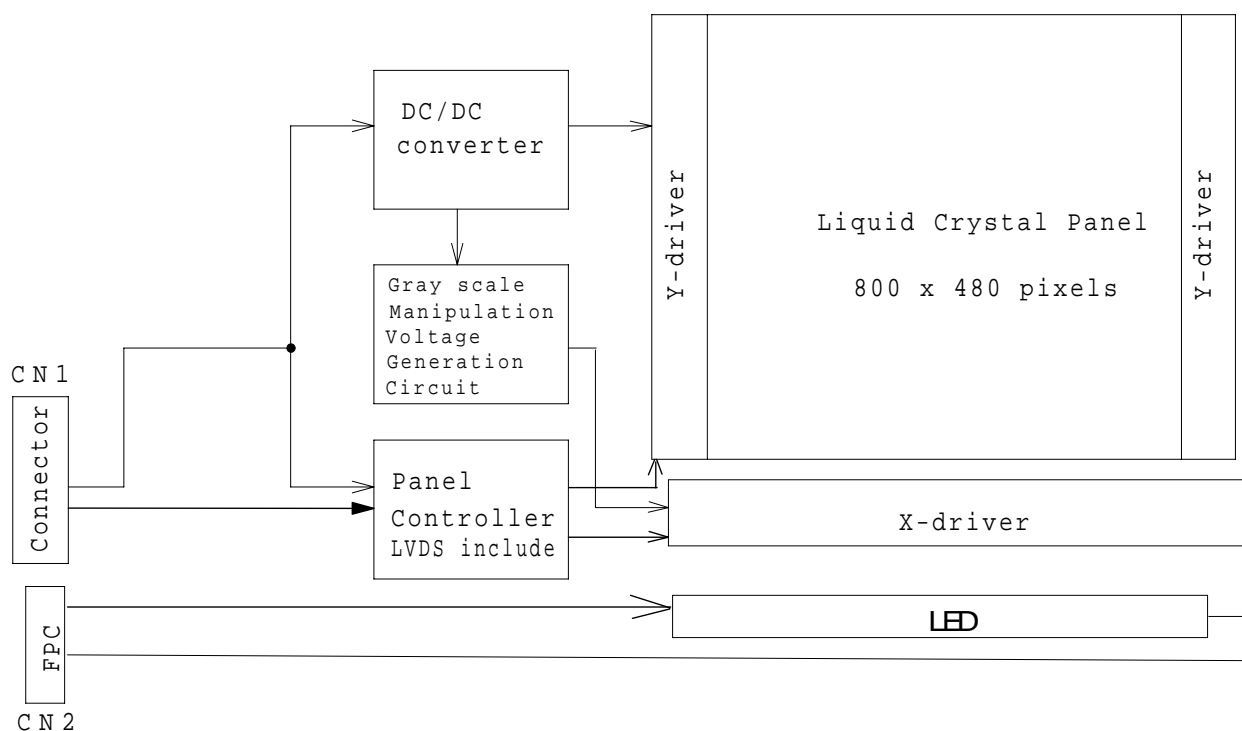

SEQUENCE OF POWER SUPPLIES AND SIGNALS

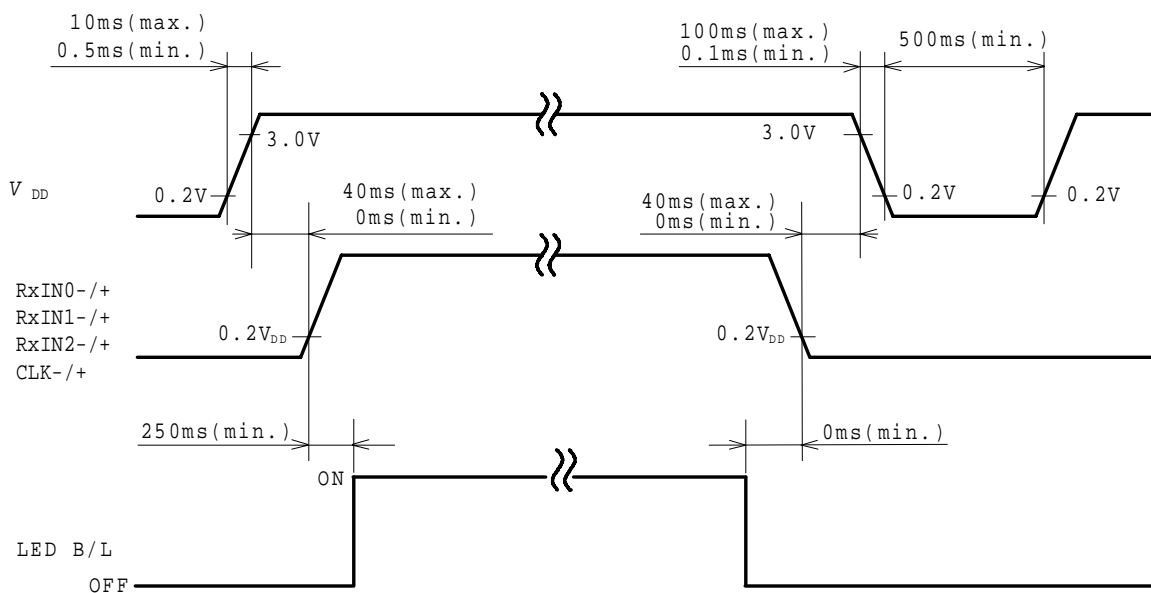

TIMING CHART

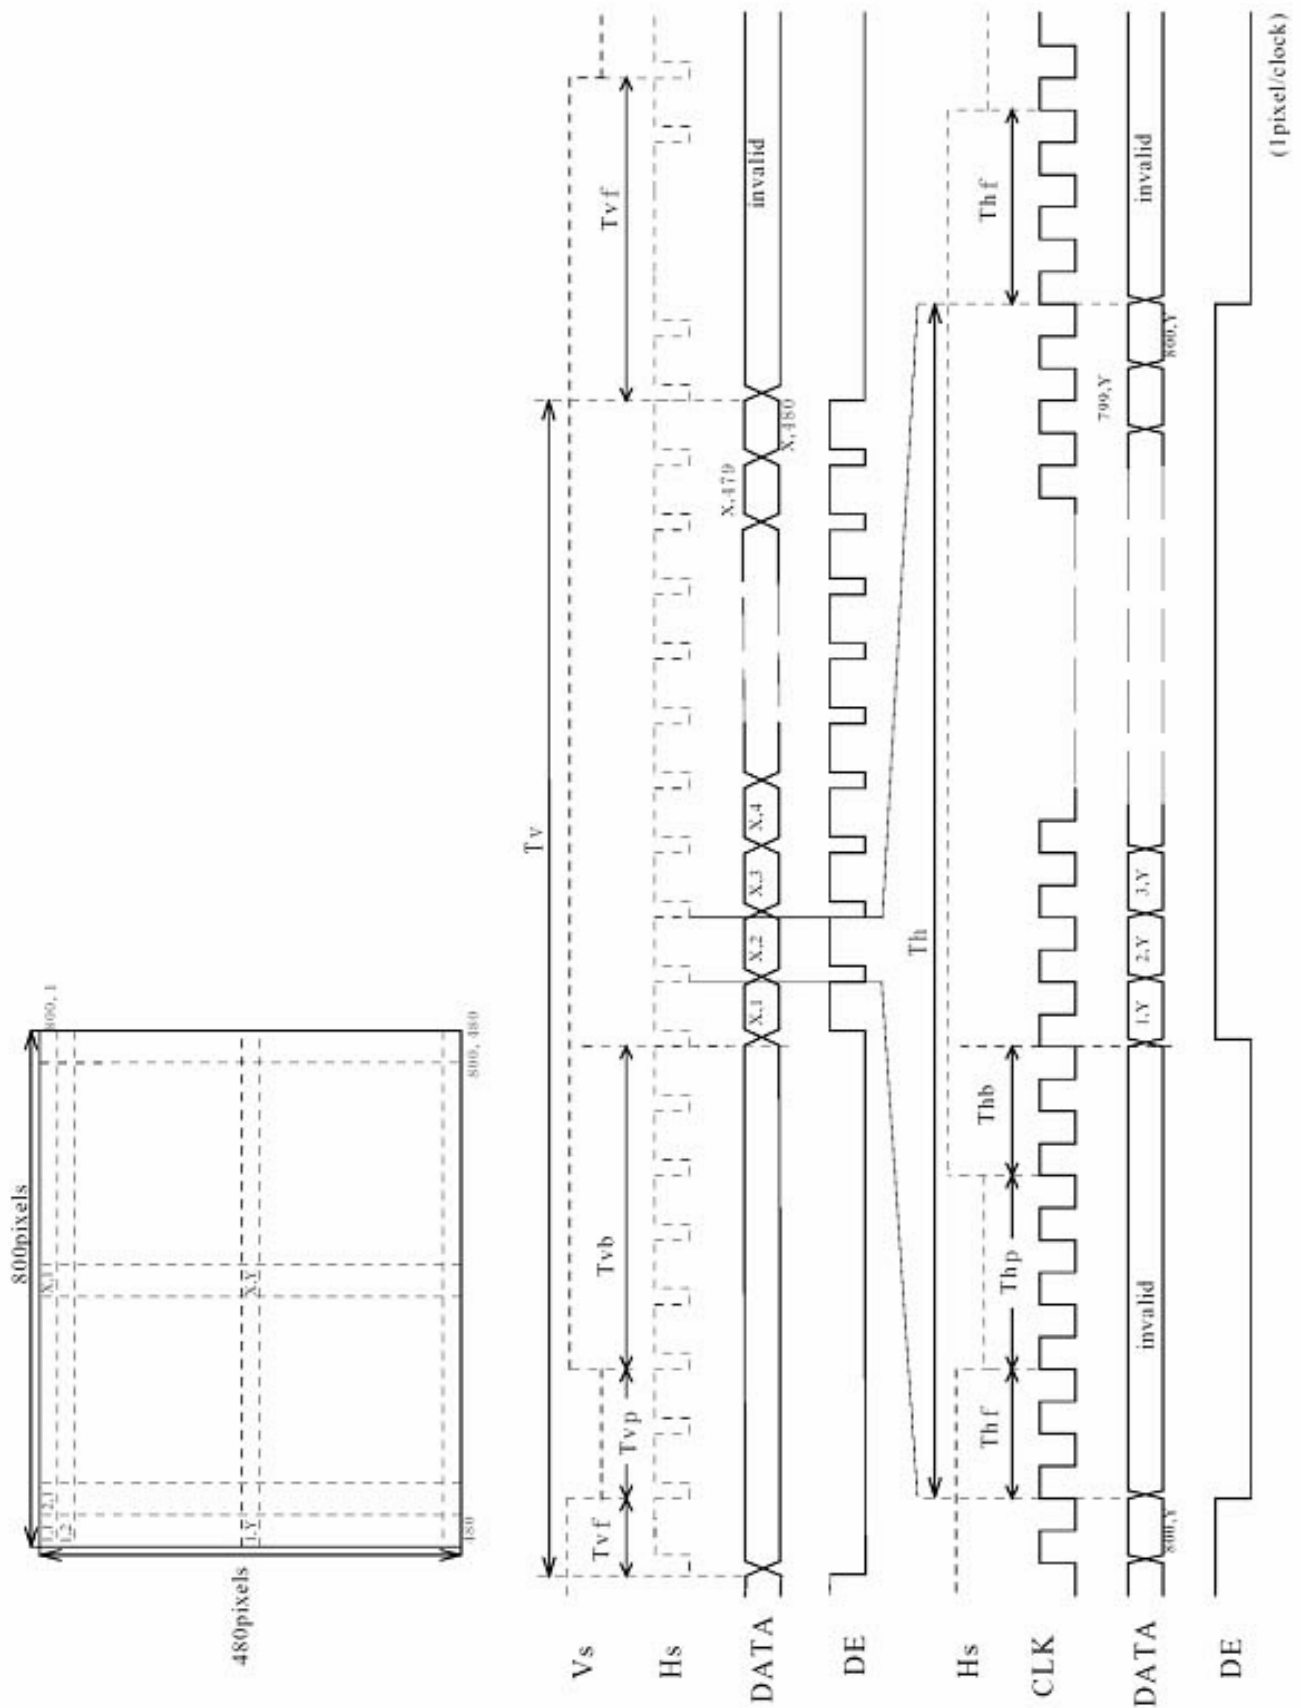

TIMING SPECIFICATION ^{1) 2) 3) 4) 5) 6)}

Item		Symbol	min.	typ.	max.	unit
CLK Clock	frequency	F_{ck}	29.88	33.2	36.52	MHz
	Period	Clk	27.4	30.1	33.5	ns
	High Time	T_{ch}	12	-	-	ns
	Low time	T_{cl}	12	-	-	ns
HS Horizontal Sync	Period	Th	944	1056	1088	(Clk)
			-	31.8	-	us
	Pulse Width	Thp	4	128	-	(Clk)
	Front Porch	Thf	-	40	-	(Clk)
	Back Porch	Thb	7	88	-	(Clk)
VS Vertical Sync	Period	Tv	516	525	534	(Th)
			14.7	16.6	17.4	ms
	Pulse Width	Tvp	1	2	-	(Th)
	Front Porch	Tvf	-	11	-	(Th)
	Back Porch	Tvb	4	32	-	(Th)

Note 1) If NCLK is fixed to "H" or "L" level for certain period while DE is supplied, the panel may be damaged.

Note 2) Please adjust LCD operating signal timing and FL driving frequency, to optimize the display quality.

There is a possibility that flicker is observed by the interference of LCD operating signal timing and FL driving condition (especially driving frequency), even if the condition satisfies above timing specifications.

Note3) Do not make t_v , t_h and t_{hp} fluctuate.

Note4) In case of using the long frame period, the deterioration of display quality, noise etc. may be occurred.

Note5) NCLK count of each Horizontal Scanning Time should be always the same.

V-Blanking period should be " n " X "Horizontal Scanning Time". (n : integer)

Frame period should be always the same.

CONNECTOR PIN ASSIGNMENT FOR INTERFACE

CN1 INPUT SIGNAL

Connector : FI-XB30SRL-HF11 / Japan Aviation Electronics Industry, Ltd.

Terminal No.	Symbol	Function
1	NC	NC
2	V _{LED1-K}	LED1 Power Supply(Cathode)
3	V _{LED2-K}	LED2 Power Supply(Cathode)
4	V _{LED3-K}	LED3 Power Supply(Cathode)
5	NC	NC
6	NC	NC
7	V _{LED-A}	LED POWER SUPPLY(Anode)
8	NC	NC
9	NC	NC
10	Reserve	Reserve(NC)
11	Reserve	Reserve(NC)
12	NC	
13	Reserve	Reserve(NC)
14	Reserve	Reserve(NC)
15	GND	GND
16	CLK+	Positive Clock
17	CLK-	Negative Clock
18	GND	GND
19	RxIN2+	Positive LVDS differential data input (B2-B5, HS, VS, DE)
20	RxIN2-	Negative LVDS differential data input (B2-B5, HS, VS, DE)
21	GND	GND
22	RxIN1+	Positive LVDS differential data input (G1-G5, B0-B1)
23	RxIN1-	Negative LVDS differential data input (G1-G5, B0-B1)
24	GND	GND
25	RxIN0+	Positive LVDS differential data input (R0-R5, G0)
26	RxIN0-	Negative LVDS differential data input (R0-R5, G0)
27	GND	GND
28	GND	GND
29	VDD	+3.3V POWER SUPPLY
30	VDD	+3.3V POWER SUPPLY

Note 1) NC terminal should be open.

256k (k=1024) COLORS COMBINATION TABLE

	Display	R5 R4 R3 R2 R1 R0	G5 G4 G3 G2 G1 G0	B5 B4 B3 B2 B1 B0	Gray Scale Level
Basic Color	Black	L L L L L L L	L L L L L L L	L L L L L L L	-
	Blue	L L L L L L L	L L L L L L L	H H H H H H H	-
	Green	L L L L L L L	H H H H H H H	L L L L L L L	-
	Light Blue	L L L L L L L	H H H H H H H	H H H H H H H	-
	Red	H H H H H H H	L L L L L L L	L L L L L L L	-
	Purple	H H H H H H H	L L L L L L L	H H H H H H H	-
	Yellow	H H H H H H H	H H H H H H H	L L L L L L L	-
	White	H H H H H H H	H H H H H H H	H H H H H H H	-
Gray Scale of Red	Black	L L L L L L L	L L L L L L L	L L L L L L L	L 0
	Dark ↑ ↓ Light	L L L L L H L	L L L L L L L	L L L L L L L	L 1
		L L L L L L L	L L L L L L L	L L L L L L L	L 2
		:	:	:	L3... L60
		:	:	:	L61
	H H H H L H L	L L L L L L L	L L L L L L L	L62	
H H H H H H H	L L L L L L L	L L L L L L L	Red L63		
Gray Scale of Green	Black	L L L L L L L	L L L L L L L	L L L L L L L	L 0
	Dark ↑ ↓ Light	L L L L L L L	L L L L L L H	L L L L L L L	L 1
		L L L L L L L	L L L L L H L	L L L L L L L	L 2
		:	:	:	L3... L60
		:	:	:	L61
	L L L L L L L	H H H H L H L	L L L L L L L	L62	
L L L L L L L	H H H H H H H	L L L L L L L	Green L63		
Gray Scale of Blue	Black	L L L L L L L	L L L L L L L	L L L L L L L	L 0
	Dark ↑ ↓ Light	L L L L L L L	L L L L L L L	L L L L L L H	L 1
		L L L L L L L	L L L L L L L	L L L L L H L	L 2
		:	:	:	L3... L60
		:	:	:	L61
	L L L L L L L	L L L L L L L	H H H H L H L	L62	
L L L L L L L	L L L L L L L	H H H H H H H	Blue L63		
Gray Scale of White & Black	Black	L L L L L L L	L L L L L L L	L L L L L L L	L 0
	Dark ↑ ↓ Light	L L L L L H L	L L L L L L H	L L L L L L H	L 1
		L L L L L H L	L L L L L H L	L L L L L H L	L 2
		:	:	:	L3... L60
		:	:	:	L61
	H H H H L H L	H H H H L H L	H H H H L H L	L62	
H H H H H H H	H H H H H H H	H H H H H H H	White L63		



FOR SAFETY

LCD module is generally designed with precise parts to achieve light weighted thin mechanical dimensions.

In using our Modules, make certain that you fully understand and put into practice the warnings and safety precautions detailed in Engineering Information No.EE-N001,"CAUTIONS AND INSTRUCTIONS FOR TOSHIBA LCD MODULES".

Refer to individual specifications and TECHNICAL DATA sheets (hereinafter called "TD") for more detailed technical information.

1) SPECIAL PURPOSES

A) Toshiba Matsushita Display Technology's Standard LCD Modules have not been customized for operation in extreme environments or for use in applications where performance failures could be life-threatening or otherwise catastrophic.

B) Since Toshiba Matsushita Display Technology's Standard LCD Modules have not been designed for operation in extreme environments, they must never be used in devices that will be exposed to abnormally high levels of vibration or shock which exceed Toshiba Matsushita Display Technology's published specification limits.

C) In addition, since Toshiba Matsushita Display Technology Standard LCD Modules have not been designed for use in applications where performance failures could be life-threatening or catastrophic, they must never be installed in aircraft navigation control systems (such as, but not limited to Traffic Collision Avoidance System and Air Traffic Indicator), in military defense or weapons systems, in critical industrial process-control systems (e.g., those involved in the production of nuclear energy), or in critical medical device or patient life-support systems.

2) DISASSEMBLING OR MODIFICATION

DO NOT DISASSEMBLE OR MODIFY the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display.

Toshiba Matsushita Display Technology does not warrant the module, if customer disassembled or modified it.

3) BREAKAGE OF LCD PANEL

DO NOT INGEST liquid crystal material, DO NOT INHALE this material, and DO NOT CONTACT the material with skin, if LCD panel is broken and liquid crystal material spills out.

If liquid crystal material comes into mouth or eyes, rinse mouth or eyes out with water immediately.

If this material contact with skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.

4) GLASS OF LCD PANEL

BE CAREFUL WITH CHIPS OF GLASS that may cause injuring fingers or skin, when the glass is broken.

5) ELECTRIC SHOCK

DISCONNECT POWER SUPPLY before handling LCD module.

DO NOT TOUCH the parts inside LCD module and the fluorescent lamp's connector or cables in order to prevent electric shock, because high voltage is supplied to these parts from the inverter unit while power supply is turned on.

6) ABSOLUTE MAXIMUM RATINGS AND POWER PROTECTION CIRCUIT

DO NOT EXCEED the absolute maximum rating values under the worst probable conditions caused by the supply voltage variation, input voltage variation, variation in parts' constants, environmental temperature, etc., otherwise LCD module may be damaged.

Employ protection circuit for power supply, whenever the specification or TD specifies it.

Suitable protection circuit should be applied for each system design.

7) RECOMMENDED OPERATION CONDITIONS

The performance and quality of the LCD panel are warranted only when the LCD panel is used within "the recommended operation conditions". Toshiba Matsushita Display Technology Co., Ltd. never warrants the performance and quality of the LCD panel when you use the LCD panel over "the recommended operation conditions", although within "the absolute maximum rating".

To use the LCD panel over "the recommended operation conditions" may have bad influence on the characteristics and reliability of the LCD panel and may shorten the life of the LCD panel.

Therefore, when designing the whole set, not to be over "the recommended operation conditions", you should fully take care of supply voltage change, characteristic of connection parts, surge of input-and-output line, and surrounding temperature.

8) DISPOSAL

When dispose LCD module, obey to the applicable environmental regulations.