


SMD Power Inductors (NR series S type)

NRS8040T470MJGK

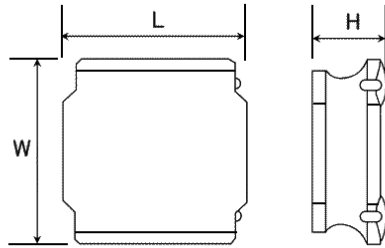

■ Features

- Item Summary
47 μ H(\pm 20%), 1500mA, 1500mA
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Taping 1000pcs

■ Products characteristics table

CaseSize (EIA/JIS)	-/8080
Inductance	47 μ H(\pm 20%)
Inductance Measuring Frequency	100kHz
Rated Current -Saturation Current	1500mA
Rated Current -Temperature Rise Current	1500mA
DC Resistance (max)	0.182 Ω
Avg. of DC.Resistance	0.14 Ω
Self-resonant Frequency (min)	8MHz
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow


■ External Dimensions

L	8mm \pm 0.2
W	8mm \pm 0.2
H	4mm max

■ Recommended Land Patterns

【推奨ランドパターン】
 実装上の注意
 ・実装状態を確認の上ご使用ください。また、お買い上げの際は、
 ・本製品のはんだ付はリフローはんだ工法に限り、手付けはんだ工法は不可です。

【Recommended Land Patterns】
 Surface Mounting
 ・Mounting and soldering conditions should be checked beforehand.
 ・Applicable soldering process to these products is reflow soldering only.



SMD Power Inductors (NR series/NR series H type/S type /V type)

Type	A	B	C
NRS8030,	1.8	5.6	7.5
NR 6040, NRS8040			

unit: mm