
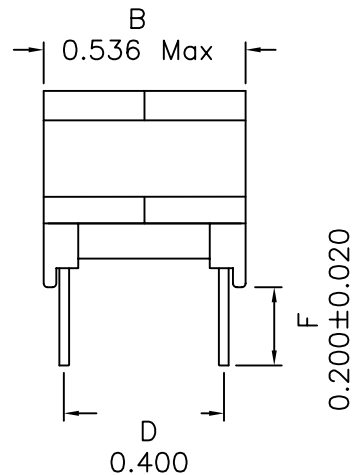


1. Mechanical Dimensions:

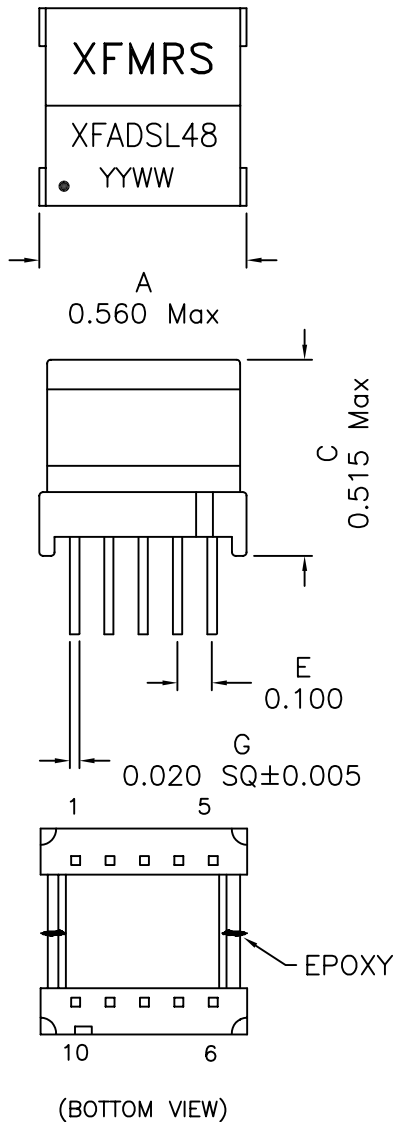


Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

DOC. REV: A/1

2. Schematic:

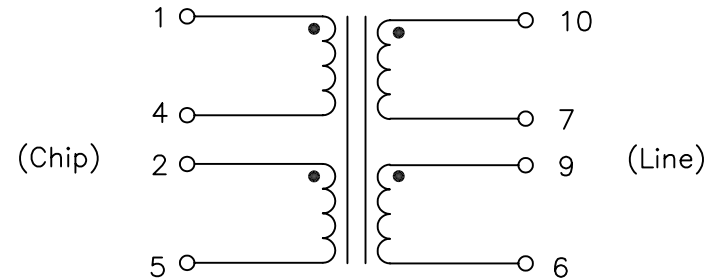

3. Electrical Specifications:

- OCL: Pins 10-6 800uH±6% @10KHz 0.1V
- Leakage L: Pins 10-6 15uH Max @100KHz 0.1V
Short Chip, Tie Pins 7&9
- CW/W: Pins 1-10 65pF Max @100KHz 0.1V
- Turns Ratio: (10-6):(1-5) 3.3CS:1CS±1%
Tie Pins 2-4, 7-9
- DC Res.: Pins 10-7 0.774 Ohms Max
- DC Res.: Pins 9-6 0.774 Ohms Max
- DC Res.: Pins 1-4 0.18 Ohms Max
- DC Res.: Pins 2-5 0.18 Ohms Max
- HYPOT: 2000Vrms, Chip to Line, Wdgs to Core

Note: Designed to meet the requirements of UL1950, for Supplementary Insulation with 250 working volts.

XFMRS Inc	Title: ADSL TRANSFORMER	
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XFADSL48 REV. A
	DWN.	廖玉坤 May-22-02
	CHK.	李清儿 May-22-02
SHEET 1 OF 1	APP.	Isaiah M May-22-02