


Aerospace 40 V power Schottky rectifier

Datasheet - production data

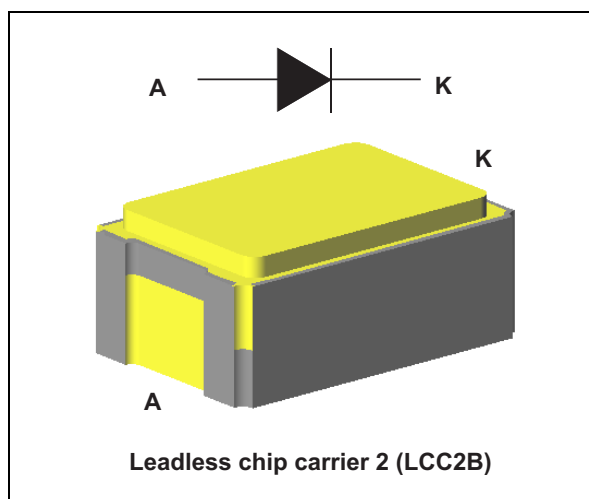

Description

This power Schottky rectifier is designed and packaged to comply with the ESCC5000 specification for aerospace products. It is housed in a surface mount hermetically sealed LCC2B package whose footprint is 100% compatible with industry standard solutions in D5B.

The 1N5822U is suitable for switching mode power supplies and high frequency DC to DC converters such as low voltage high frequency inverter, free wheeling or polarity protection.

Features

- Aerospace applications
- Surface mount hermetic package
- High thermal conductivity materials
- Very small conduction losses
- Negligible switching losses
- Extremely fast switching
- Low forward voltage drop
- Package mass: 0.18 g
- Target radiation qualification
 - 150 krad (Si) low dose rate
 - 3 Mrad (Si) high dose rate
- ESCC qualified

Table 1. Device summary⁽¹⁾

Order code	ESCC detailed specification	Quality level	Lead finish	EPPL	$I_{F(AV)}$	V_{RRM}	$T_{j(max)}$	$V_{F(max)}$
1N5822UB1		Engineering model	Gold		3	40	150	0.485
1N5822U01B	5106/020/01	ESCC	Gold	yes				
1N5822U02B	5106/020/02	ESCC	Solder dip					

1. Contact ST sales office for information about the specific conditions for products in die form.

1 Characteristics

Table 2. Absolute ratings (limiting values)

Symbol	Parameter	Value	Unit
V_{RRM}	Repetitive peak reverse voltage	40	V
$I_{F(RMS)}$	Forward rms current	10	A
$I_{F(AV)}$	Average forward rectified current	$T_c \geq 139\text{ °C}, \bar{\delta} = 0.5$	A
I_{FSM}	Forward surge current	$t_p = 10\text{ ms sinusoidal}$	A
T_{stg}	Storage temperature range	-65 to +150	°C
T_j	Maximum operating junction temperature ⁽¹⁾	150	°C
T_{sol}	Maximum soldering temperature ⁽²⁾	245	°C

- $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th(j-a)}}$ condition to avoid thermal runaway for a diode on its own heatsink
- Maximum duration 5 s. The same package must not be re-soldered until 3 minutes have elapsed.

Table 3. Thermal resistance

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	Junction to case	7	°C/W

Table 4. Static electrical characteristics

Symbol	Parameter	Tests conditions	Min.	Typ.	Max.	Unit	
I_R ⁽¹⁾	Reverse current	$T_j = -55\text{ °C}$	$V_R = 40\text{ V}$	-	-	40	μA
		$T_j = 25\text{ °C}$		-	-	80	
		$T_j = 100\text{ °C}$		-	-	12	mA
V_F ⁽²⁾	Forward voltage	$T_j = 25\text{ °C}$	$I_F = 1\text{ A}$	-	-	0.4	V
		$T_j = -55\text{ °C}$	$I_F = 3\text{ A}$	-	-	0.56	
		$T_j = 25\text{ °C}$		-	-	0.485	
		$T_j = 100\text{ °C}$		-	-	0.455	
		$T_j = 25\text{ °C}$	$I_F = 9.4\text{ A}$	-	-	0.70	

- Pulse test: $t_p = 5\text{ ms}, \bar{\delta} < 2\%$
- Pulse test: $t_p = 680\text{ }\mu\text{s}, \bar{\delta} < 2\%$

To evaluate the conduction losses use the following equation:

$$P = 0.32 \times I_{F(AV)} + 0.050 \times I_{F(RMS)}^2$$

Table 5. Dynamic characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_j	Diode capacitance	$V_R = 5\text{ V}, F = 1\text{ MHz}$	-	-	240	pF

Figure 1. Average forward power dissipation versus average forward current

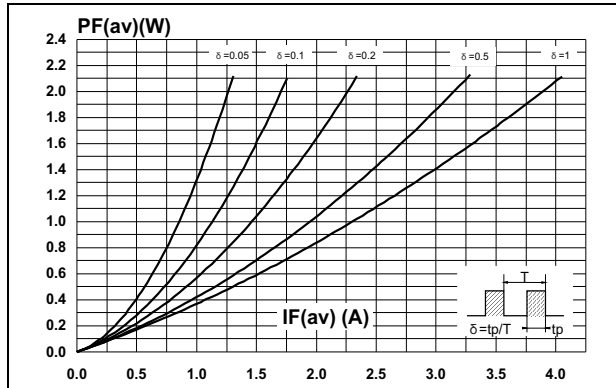


Figure 2. Average forward current versus ambient temperature (delta = 0.5)

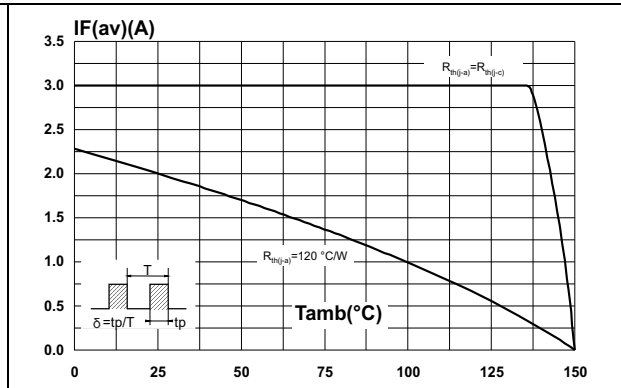


Figure 3. Non repetitive surge peak forward current versus overload duration (maximum values)

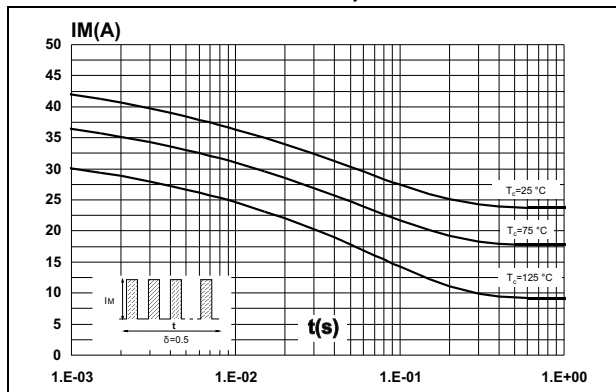


Figure 4. Relative variation of thermal impedance junction to case versus pulse duration

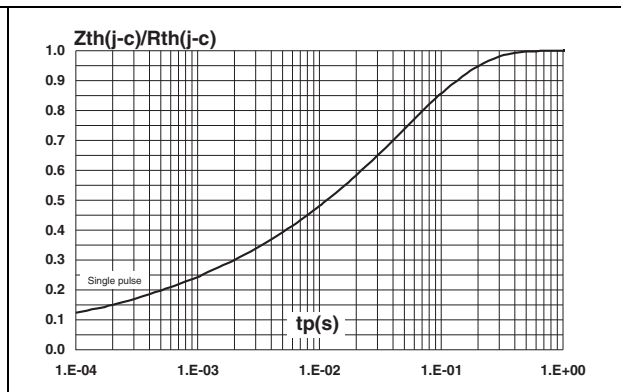


Figure 5. Reverse leakage current versus reverse voltage applied (typical values)

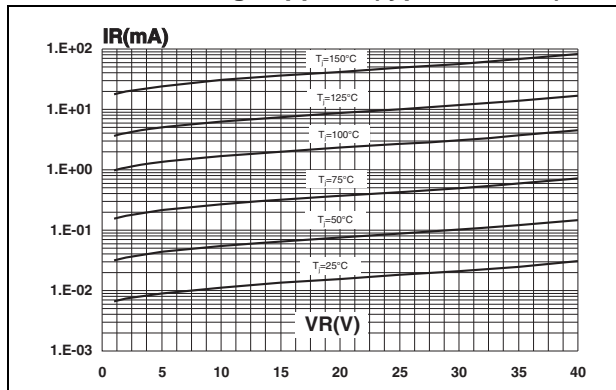


Figure 6. Forward voltage drop versus forward current (typical values)


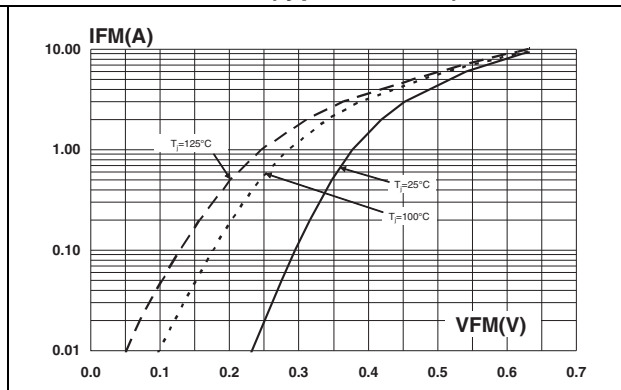



Figure 7. Non repetitive surge peak forward current versus number of cycles

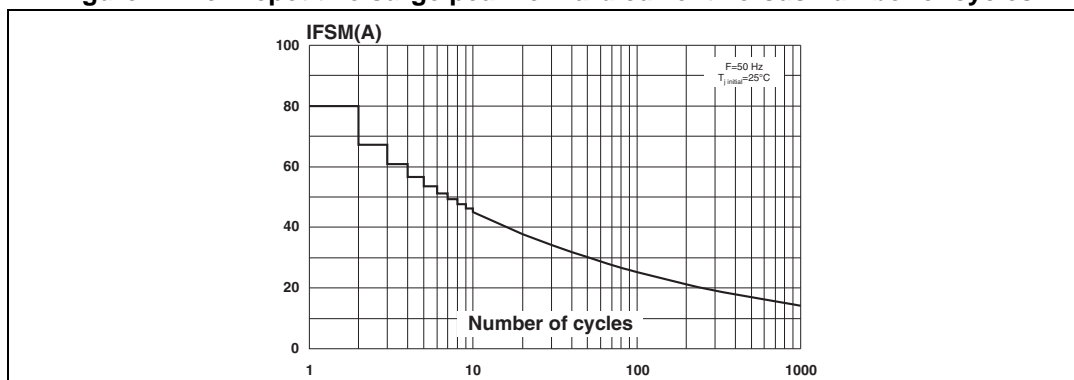

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK[®] is an ST trademark.

Figure 8. Leadless chip carrier 2 (LCC2B) package dimension definitions

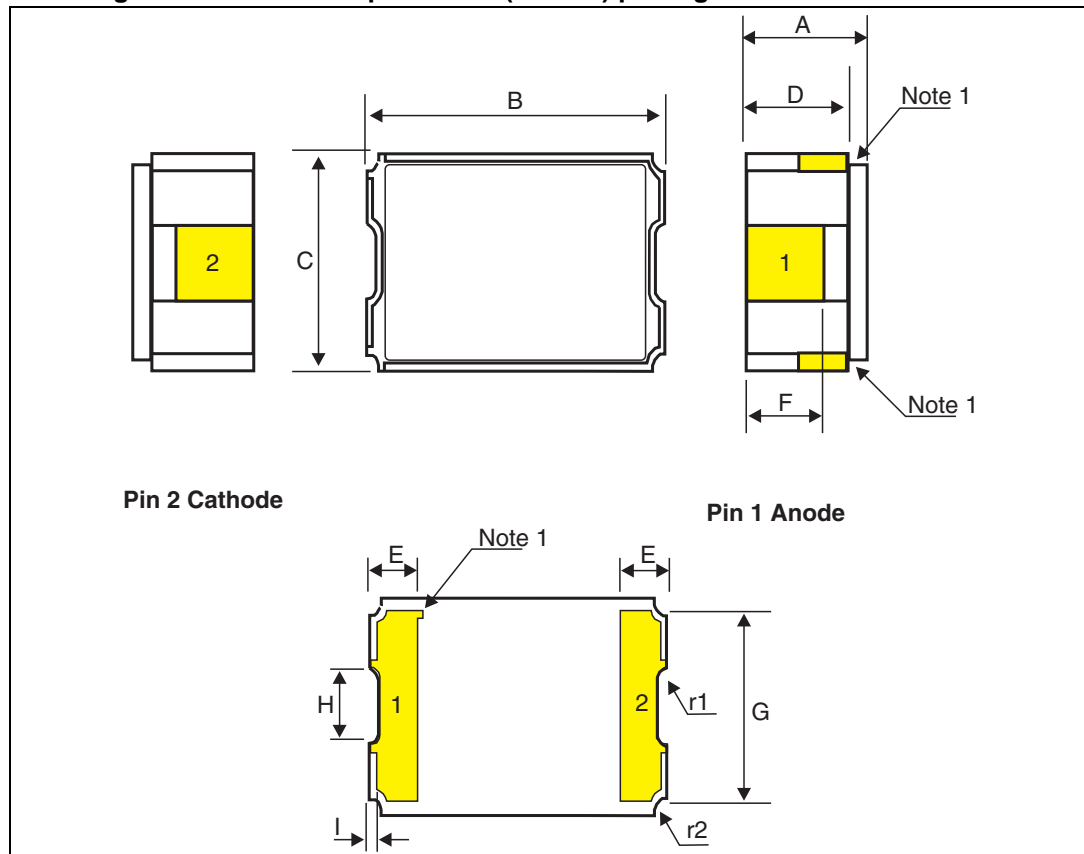

1. The anode is identified by metalization in two top internal angles and the index mark.

Table 6. Leadless chip carrier 2 (LCC2B) package dimension values

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A ⁽¹⁾	2.04	2.23	2.42	0.080	0.088	0.095
B	5.27	5.4	5.6	0.207	0.213	0.220
C	3.49	3.62	3.76	0.137	0.143	0.148
D	1.71	1.90	2.09	0.067	0.075	0.082
E	0.48	-	0.71	0.019	-	0.028
F	-	1.4	-	-	0.055	-
G	-	3.32	-	-	0.131	-
H	-	1.82	-	-	0.072	-
I	-	0.15	-	-	0.006	-
r1	-	0.15	-	-	0.006	-
r2	-	0.20	-	-	0.008	-

1. Measurement prior to solder coating the mounting pads on bottom of package

3 Ordering information

Table 7. Ordering information⁽¹⁾

Order code	ESCC detailed specification	Package	Lead finish	Marking ⁽²⁾	EPPL	Mass	Packing
1N5822UB1		LCC2B	Gold	5822	-	0.18 g	Waffle pack
1N5822U01B	5106/020/01		Gold	510602001	Y		
1N5822U02B	5106/020/02		Solder dip	510602002	-		

1. Contact ST sales office for information about the specific conditions for products in die form.

2. Specific marking only. The full marking includes in addition:

For the engineering models: ST logo, date code, country of origin (FR).

For ESCC flight parts: ST logo, date code, country of origin (FR), ESA logo, serial number of the part within the assembly lot.

4 Other information

4.1 Date code

Date code is structured as describe below:

- EM xyywwz
- ESCC flight yywwz

Where:

- x (EM only): 3, assembly location Rennes (France)
- yy: last two digits year
- ww: week digits
- z: lot index in the week

4.2 Documentation

In [Table 8](#) is a summary of the documentation provided with each type of products.

Table 8. Documentation provided with each type of products

Quality level	Documentation
Engineering model	
ESCC flight	Certificate of conformance

5 Revision history

Table 9. Document revision history

Date	Revision	Changes
10-Aug-2009	1	First issue.
25-Sep-2011	2	Updated ESCC status in <i>Features</i> and added footnote to <i>Table 3</i> .
8-Nov-2013	3	Updated <i>Table 1</i> , <i>Table 2</i> , <i>Table 5</i> and <i>Table 7</i> and inserted <i>Other information</i> .

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

