
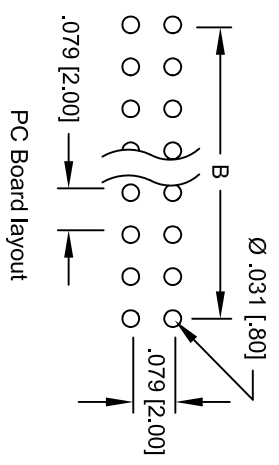
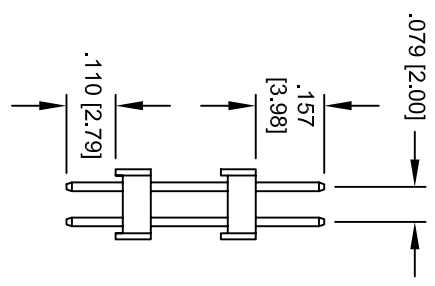
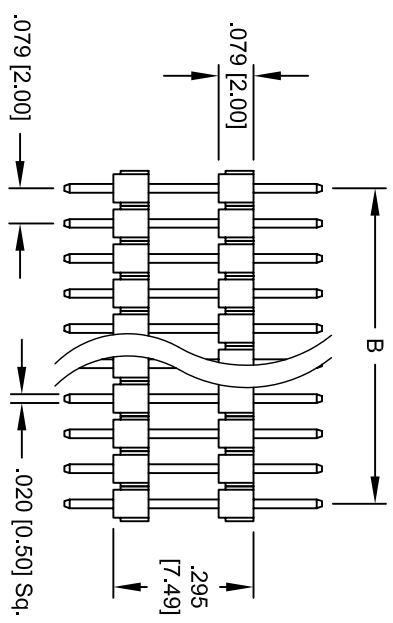


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/9/04	

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

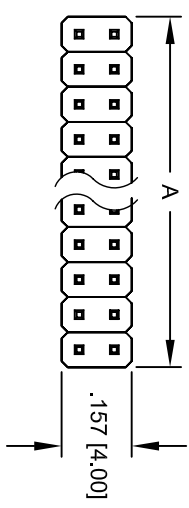

A = .079" [2.00] x No. of positions  
 B = .079" [2.00] x No. of spaces

**SPECIFICATIONS:**

- Material: Insulator: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Plating: Gold Flash over Nickel underplate on mating area, Tin over Copper underplate on PCB tails
- Electrical:
  - Operating voltage: 250 VAC max
  - Current rating: 1 Amp max
  - Contact resistance: 20 mohms max
  - Insulation resistance: 5000 Mohms min @ 500 VDC
  - Dielectric withstanding voltage: 1000 VAC for 1 minute
  - Temperature Rating: Operating temperature: -55°C to +105°C

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN SS	9/9/04
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **STACKED PIN HEADER, .079" PITCH**  
 DUAL ROW, PCB

SIZE	PART NO.	REV.
X	D2PH-2-XX-SG-.157/.110/.295	-
REF:	SCALE: NTS	SHEET 1 OF 1