

LM12257A/B Series – 1.20 inch 5x7 Square Dot Matrix LED Display



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES







Features

- 28.60 mm (1.2 inch) matrix height
- Dot size: 4x4mm
- Pitch: 4.1mm
- Wide viewing angle
- Range of emitted colors
- I.C. compatible
- Low power consumption
- White dot, grey or black face
- RoHS compliant

Available options

- Alternative emitting luminosity:
Standard or high brightness version
- Alternative emitted color
- Alternative dot and face color
- Alternative font
- Both CA and CC versions are available
- Cropped terminal pins

Package Dimensions

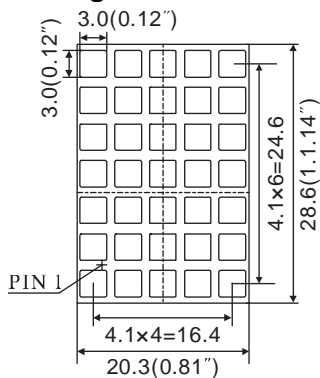


Notes:

1. All dimensions are in millimeters (inches), Tolerance is $\pm 0.25\text{mm}$ (0.01inch) unless other wise noted.
2. Specifications are subject to change without notice.
3. The gap between the reflector and PCB shall not exceed 0.25mm.


Internal Circuit Diagram

LM12257B (Common Anode Row)

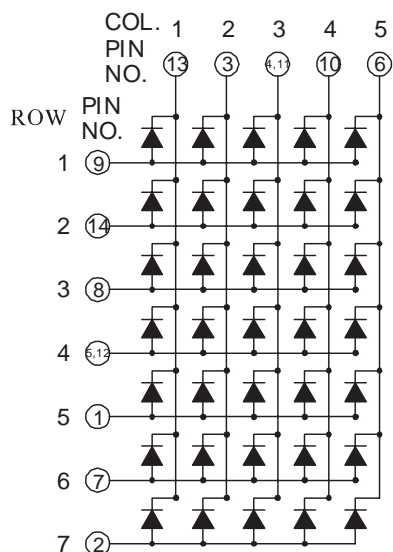

CODE N

LM12257A (Common Cathode Row)

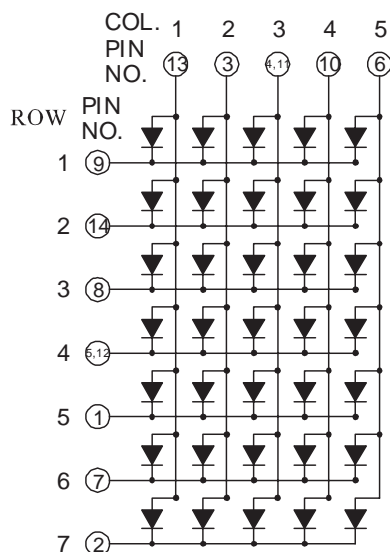

CODE M

Selection Guide

Part No.		Chip			Iv@IF=20mA	
Common Cathode Row	Common Anode Row	Material	Color	WLD	One Dot	
					Min.	Typ.
LM12257AR	LM12257BR	GaAlAs	Super Red	640	8	10
LM12257AD	LM12257BD	GaAlAs	Hi-Red	640	18	25
LM12257AO	LM12257BO	GaAsP	Orange	625	7	9
LM12257AY	LM12257BY	GaAsP	Yellow	588	8	10
LM12257AG	LM12257BG	GaP	Green	568	7	9
LM12257AUR	LM12257BUR	AlGaInP	Ultra Red	640	30	45
LM12257AUO	LM12257BUO	AlGaInP	Ultra Orange	625	45	60
LM12257AUA	LM12257BUA	AlGaInP	Ultra Amber	605	30	45
LM12257AUY	LM12257BUY	AlGaInP	Ultra Yellow	595	30	45
LM12257AUG	LM12257BUG	AlGaInP	Ultra Green	573	30	45
LM12257APG	LM12257BPG	InGaN	Pure Green	525	120	300
LM12257AUB	LM12257BUB	InGaN	Ultra Blue	470	30	45
LM12257AUW	LM12257BUW	SMD	Ultra White	\	100	120
Unit:	\	\	\	nm	mcd	mcd

Electrical Characteristics & Absolute Maximum Ratings

Color		Electrical Characteristics ^[1]			Absolute Maximum Ratings ^[1]		
		V _F @ I _F =20mA ^[2]		Reverse Current VR=5V	Power Dissipation	DC Forward Current	Peak Forward Current ^[3]
		Typ.	Max.				
Super Red	Per Dot	1.8	2.2	30	60	25	100
Hi-Red	Per Dot	1.8	2.2	30	60	25	100
Orange	Per Dot	2.1	2.5	30	80	30	100
Yellow	Per Dot	2.1	2.5	30	80	30	100
Green	Per Dot	2.2	2.5	30	80	30	100
Ultra Red	Per Dot	1.9	2.6	30	60	30	100
Ultra Orange	Per Dot	2.0	2.6	30	65	30	100
Ultra Amber	Per Dot	2.0	2.6	30	65	30	100
Ultra Yellow	Per Dot	2.0	2.6	30	65	30	100
Ultra Green	Per Dot	2.1	2.6	30	75	30	100
Pure Green	Per Dot	3.5	4.0	30	110	30	100
Ultra Blue	Per Dot	3.5	4.0	30	120	30	100
Ultra White	Per Dot	3.5	4.0	30	120	30	100
Unit:	\	V	V	uA	mW	mA	mA

Notes:

1. At Ta = 25 °C.
2. Forward voltage at forward current = 20mA.
3. Peak forward current at 1/10 Duty Cycle, 0.1ms Pulse.