

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0760113625](#)
Status: **Active**
Overview: [GbX I-Trac™ Backplane Connector System](#)
Description: GbX I-Trac™ Right Angle Header Module, 1.85mm by 3.70mm Pitch, Left Guided Coplanar, Right Open, 7 Rows, 6 Columns, 84 Circuits, Staggered Mating Pin Length 3.80mm & 4.70mm

Documents:

[Drawing \(PDF\)](#) [Packaging Specification PK-70873-588 \(PDF\)](#)
[Product Specification PS-75710-999 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

UL E29179


General

Product Family Backplane Connectors
 Series [76011](#)
 Application Coplanar, Daughtercard
 Component Type Right Angle Male
 Overview [GbX I-Trac™ Backplane Connector System](#)
 Product Name GbX I-Trac™
 UPC 884982755093

Physical

Circuits (Loaded) 84
 Circuits (maximum) 84
 Color - Resin Black
 Durability (mating cycles max) 200
 First Mate / Last Break Yes
 Flammability 94V-0
 Guide to Mating Part Yes
 Keying to Mating Part None
 Material - Metal High Performance Alloy (HPA)
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Net Weight 23.224/g
 Number of Columns 6
 Number of Pairs 4, Open Pin Field
 Number of Rows 7
 Orientation Right Angle
 PC Tail Length 2.00mm
 PCB Locator Yes
 PCB Retention Yes
 PCB Thickness - Recommended 1.60mm
 Packaging Type Tray
 Pitch - Mating Interface 3.70mm
 Pitch - Termination Interface 1.20mm, 2.50mm
 Plating min - Mating 0.762µm
 Plating min - Termination 0.762µm
 Polarized to PCB Yes
 Stackable No
 Surface Mount Compatible (SMC) Yes
 Temperature Range - Operating 85°C
 Termination Interface: Style Through Hole - Compliant Pin

Electrical

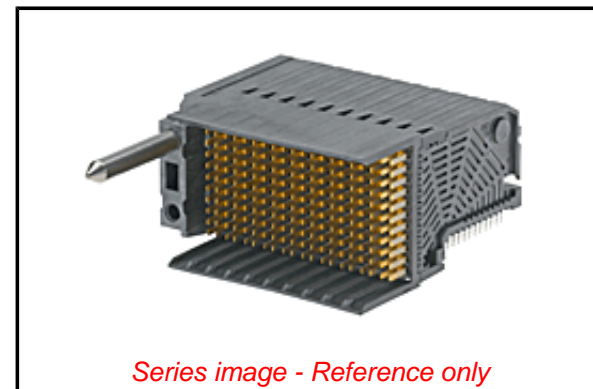

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
 -ED/79/2015 (17
 December 2015)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
 Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS
 ELV

Green Image
 Not Relevant

Search Parts in this Series

[76011](#) Series

Mates With

[76020](#) GbX I-Trac™ Right Angle Receptacle Module

Use With

[78230](#) GbX I-Trac™ Right Angle Power Receptacle

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

Current - Maximum per Contact	1.0A
Data Rate	12.0 Gbps
Shield Type	N/A
Shielded	No
Voltage - Maximum	120V AC (RMS)/DC

Solder Process Data

Lead-free Process Capability	N/A
------------------------------	-----

Material Info**Reference - Drawing Numbers**

Packaging Specification	PK-70873-588
Product Specification	PS-75710-999
Sales Drawing	SD-76011-002

Right Angle Male (RAM) Module Removal Tool	<u>0622023080</u>
Press-In Tool for Right Angle Receptacle and Header 7-Row, 6-Column	<u>0622018611</u>

This document was generated on 06/10/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION