

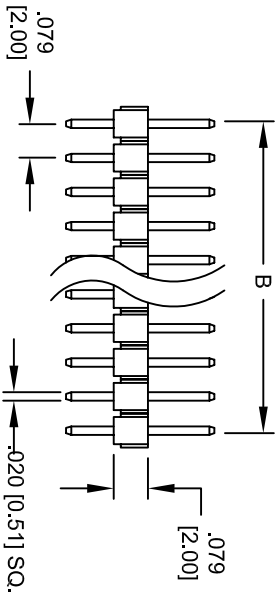
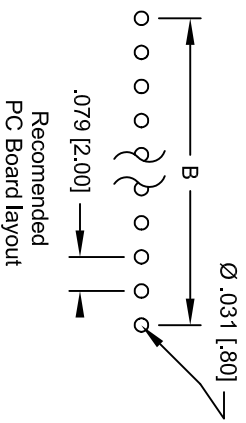


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/20/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

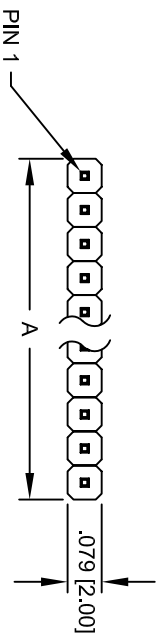

A = .079" [2.00] x No. of positions  
 B = .079" [2.00] x No. of spaces

**SPECIFICATIONS:**

Material: Insulator: PBT, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass  
 Plating: Tin over Copper underplate overall  
 Electrical:  
 Operating voltage: 250 VAC max  
 Current rating: 1 Amp max  
 Contact resistance: 20 mohms max  
 Insulation resistance: 5000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1000 VAC for 1 minute  
 Temperature Rating: Operating temperature: -55°C to +105°C

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SINGLE ROW PIN HEADER, .079" [2.00mm]  
 PITCH, TIN PLATED, 2 TO 40 PINS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES	±.10	HOLES	±.10
.XX	±.020	ØXX	±.015
.XXX	±.015	ØXXX	±.010
APPROVALS	DATE		
DRAWN	SS	9/20/04	
CHECKED			
APPROVED			
REF:	SIZE X	PART NO.	REV.
		2PH1-XX-1A	
SCALE:	NTS	SHEET	1 OF 1