
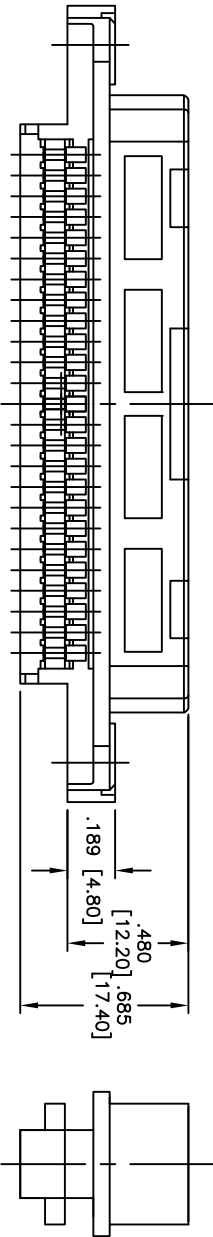


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/03/10	

APPROVED: _____
 DATE: _____ TITLE: _____

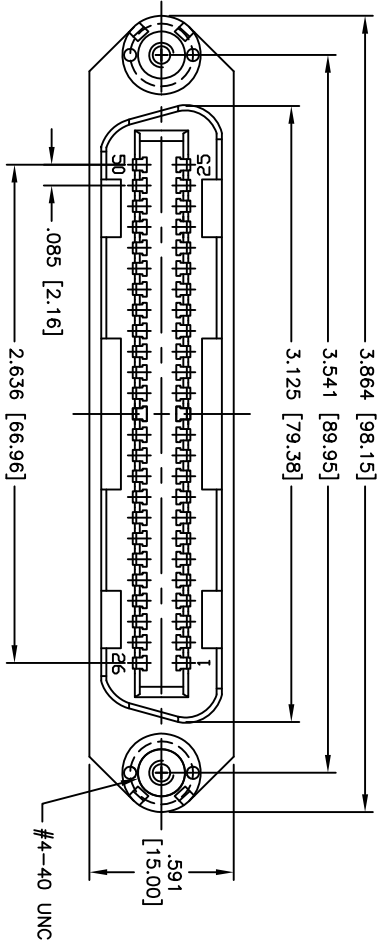

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
Contacts: Phosphor Bronze
Plating: Gold flash over Nickel underplate on mating area, Tin over Copper underplate on tails
Electrical: Current rating: 1 Amp max
 Contact resistance: 25 mohms max
 Insulation resistance: 10,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Operating temperature: -55°C to +125°C
Environmental: Lead free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 RIBBON CABLE IDC TYPE CONNECTOR
 64PIN FEMALE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN DY	5/03/10
CHECKED	
APPROVED	

SIZE X	PART NO. MR64-SE-34	REV. -
REF: S00150T	SCALE: NTS	SHEET 1 OF 1