


Dimensions in mm (inches).

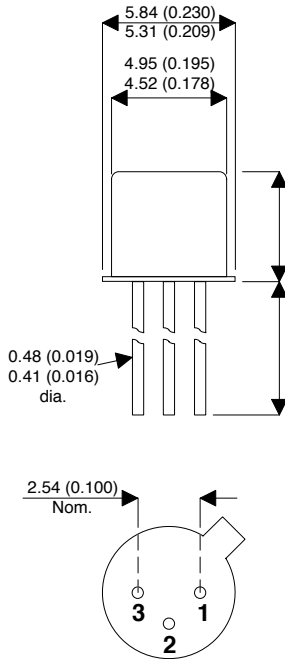

**TO18 (TO206AA)
PINOUTS**

1 – Emitter 2 – Base 3 – Collector

**Bipolar NPN Device in a
Hermetically sealed TO18
Metal Package.**

Bipolar NPN Device.

$$V_{CEO} = 45V$$

$$I_C = 0.03A$$

All American Microsemiconductor Inc.,
hermetically sealed products
can be processed in accordance with the
requirements of BS, CECC and JAN,
JANTX, JANTXV and JANS specifications

Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{CEO}^*				45	V
$I_{C(CONT)}$				0.03	A
h_{FE}	@ 5/10u (V_{CE} / I_C)	40		120	-
f_t			30M		Hz
P_D				0.3	W

* Maximum Working Voltage