
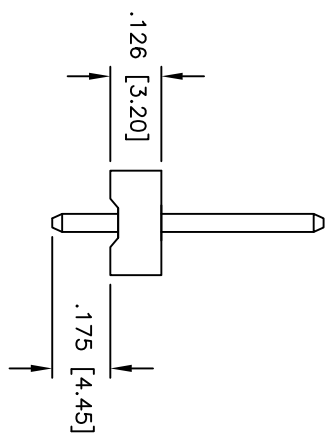
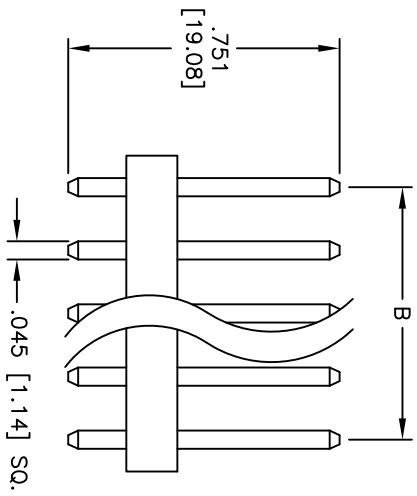
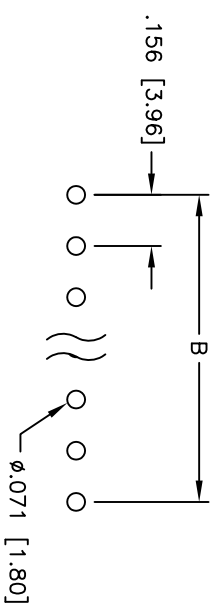


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/17/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

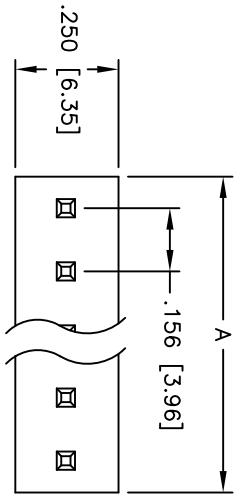

**SPECIFICATIONS:**

Material: Hi-temp thermoplastic, rated UL 94V-0  
 Insulator color: White  
 Contacts: Brass

Plating: Tin over Copper underplate overall

Operating voltage: 250V AC,DC  
 Current rating: 7A

Contact resistance: 10 mohms max  
 Dielectric withstanding voltage: 1,500 VAC for 1 minute  
 Temperature Rating: Operating temperature: -40°C to +105°C

Environmental: Lead free, RoHS compliant  
 Recommended soldering temp: 260°C for 5 seconds

Positions: 2 thru 22  
 A = .156 [3.96] x No. of Positions  
 B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS: \_\_\_\_\_ DATE: \_\_\_\_\_

DRAWN	DY	8/17/10
CHECKED		
APPROVED		

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .156 [3.96] POWER HEADER, STRAIGHT WITHOUT LOCK POLARIZER

SIZE: X PART NO.: LHB-XX-SA2-175/.751-HT-V0  
 REF: S0023T SCALE: NTS SHEET 1 OF 1