


## PNP SILICON PLANAR EPITAXIAL TRANSISTORS

CP749



TO-92  
Plastic Package

Use in Wide Variety of Industrial and Consumer Applications Including Lamp and Solenoid Drivers and Audio Amplifier

Complementary CN649

### ABSOLUTE MAXIMUM RATINGS

DESCRIPTION	SYMBOL	VALUE	UNITS
Collector Base Voltage	$V_{CBO}$	35	V
Collector Emitter Voltage	$V_{CEO}$	25	V
Emitter Base Voltage	$V_{EBO}$	5	V
Peak Pulse Current	$I_{CM}$	6	A
Collector Current Continuous	$I_C$	2	A
Power Dissipation @ $T_a=25^\circ\text{C}$	$P_D$	0.9	W
Derate Above $25^\circ\text{C}$		7.2	mW/ $^\circ\text{C}$
Power Dissipation @ $T_a=25^\circ\text{C}$	* $P_D$	1.1	W
Power Dissipation @ $T_c=25^\circ\text{C}$	$P_D$	2.2	W
Operating and Storage Junction Temperature Range	$T_{j, T_{stg}}$	- 65 to +150	$^\circ\text{C}$


\* Transistors mounted on printed circuit board. Lead Length 4mm, mounting pad for collector lead min 10mm x 10 mm, copper

### ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	MAX	UNITS
Collector Emitter Voltage	$V_{CEO}$	$I_C=1\text{mA}, I_B=0$	25		V
Collector Base Voltage	$V_{CBO}$	$I_C=100\mu\text{A}, I_E=0$	35		V
Emitter Base Voltage	$V_{EBO}$	$I_E=100\mu\text{A}, I_C=0$	5.0		V
Collector Cut Off Current	$I_{CBO}$	$V_{CB}=30\text{V}, I_E=0$		100	nA
		$V_{CB}=30\text{V}, I_E=0, T_a=100^\circ\text{C}$		10	$\mu\text{A}$
Emitter Cut Off Current	$I_{EBO}$	$V_{EB}=4\text{V}, I_C=0$		100	nA
Collector Emitter Saturation Voltage	** $V_{CE(sat)}$	$I_C=1\text{A}, I_B=100\text{mA}$		0.3	V
		$I_C=2\text{A}, I_B=200\text{mA}$		0.6	V
Base Emitter Saturation Voltage	** $V_{BE(sat)}$	$I_C=1\text{A}, I_B=100\text{mA}$		1.25	V
Base Emitter on Voltage	** $V_{BE(on)}$	$I_C=1\text{A}, V_{CE}=2\text{V}$		1.0	V
DC Current Gain	** $h_{FE}$	$I_C=50\text{mA}, V_{CE}=2\text{V}$	70		
		$I_C=1\text{A}, V_{CE}=2\text{V}$	100	300	
		$I_C=2\text{A}, V_{CE}=2\text{V}$	75		
		$I_C=6\text{A}, V_{CE}=2\text{V}$	10		

\*\*Pulse Condition: Pulse Width = 300ms, Duty Cycle  $\leq$  2%.

CP749\_Rev2 211204E

ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$  unless specified otherwise)

## DYNAMIC CHARACTERISTICS


DESCRIPTION	SYMBOL	TEST CONDITION	MIN	MAX	UNITS
Output Capacitance	$C_{obo}$	$V_{CB}=10\text{V}$ , $I_E=0$ , $f=1\text{MHz}$		100	pF
Transition Frequency	$f_T$	$V_{CE}=5\text{V}$ , $I_C=100\text{mA}$ , $f=100\text{MHz}$	100		MHz

## SWITCHING TIMES

DESCRIPTION	SYMBOL	TEST CONDITION	TYP	UNIT
Turn On Time	$t_{on}$	$I_C=500\text{mA}$ , $I_{B1}=I_{B2}=50\text{mA}$ , $V_{CC}=10\text{V}$	40	ns
Turn Off Time	$t_{off}$		500	ns


CP749\_Rev2 211204E

TO-92 Plastic Package

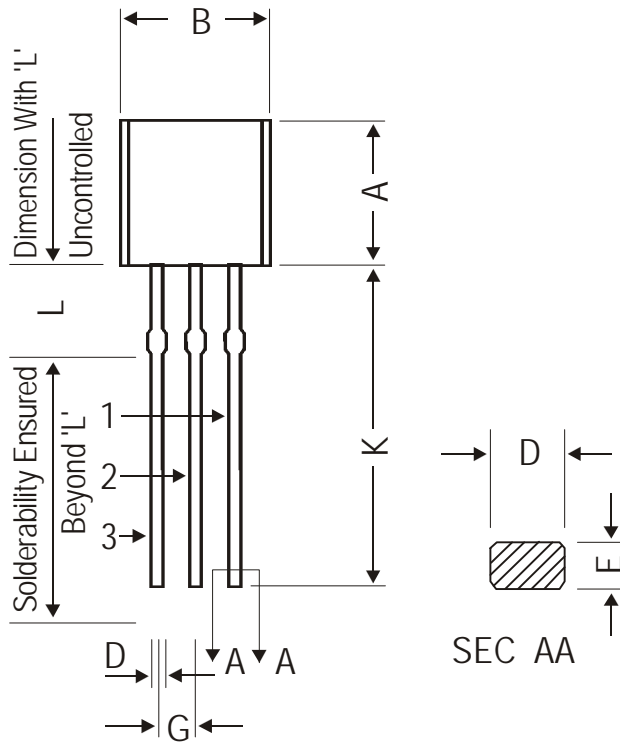


DIM	MIN.	MAX.
A	4.32	5.33
B	4.45	5.20
C	3.18	4.19
D	0.41	0.55
E	0.35	0.50
F	5 DEG	
G	1.14	1.40
H	1.20	1.40
K	12.70	—
L	1.982	2.082
M	1.03	1.20

All dimensions are in mm

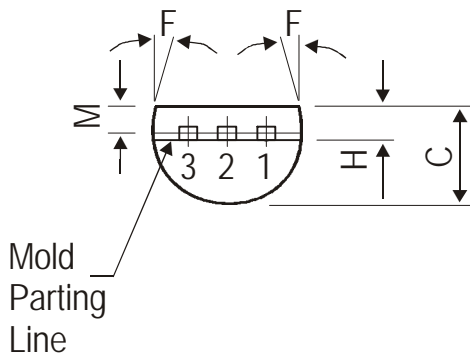

PIN CONFIGURATION

1. COLLECTOR
2. BASE
3. EMITTER

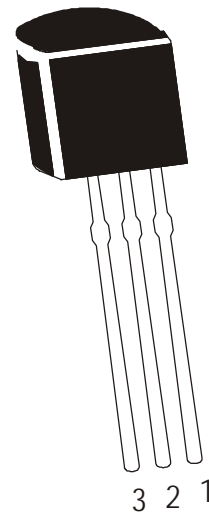


The TO-92 Package, Tape and Ammo Pack Drawings are correct as on the date of issue/revision of this Data Sheet.

The currently valid dimensions and information, may please be confirmed from the TO-92 Drawing in the Packages and Packing Section of the Product Catalogue.

Packing Details

PACKAGE	STANDARD PACK		INNER CARTON BOX		OUTER CARTON BOX		
	Details	Net Weight/Qty	Size	Qty	Size	Qty	Gr Wt
TO-92 Bulk	1K/polybag	200 gm/1K pcs	3" x 7.5" x 7.5"	5K	17" x 15" x 13.5"	80K	23 kgs
TO-92 T&A	2K/ammo box	645 gm/2K pcs	12.5" x 8" x 1.8"	2K	17" x 15" x 13.5"	32K	12.5 kgs

## TO-92 Tape and Ammo Pack

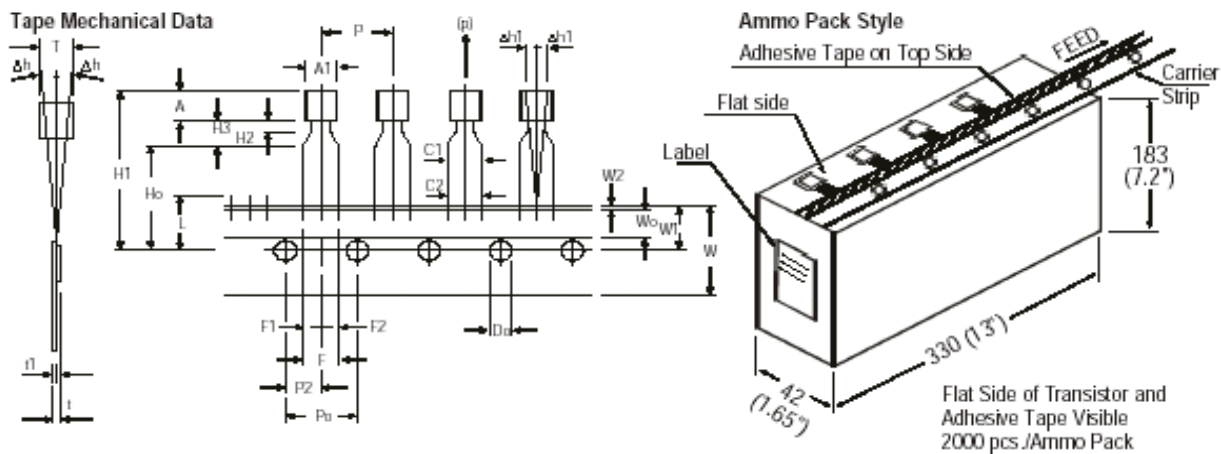

All dimensions are in mm

ITEM	SYMBOL	SPECIFICATION				
		MIN.	NOM.	MAX.	TOL.	
BODY WIDTH	A1	4.45		5.20		<b>NOTES</b> 1. Maximum alignment deviation between leads will not to be greater than 0.2mm. 2. Maximum non-cumulative variation between tape feed holes shall not exceed 1mm in 20 pitches. 3. Holddown tape will not exceed beyond the edge(s) of carrier tape and there shall be no exposure of adhesive. 4. There will be no more than three (3) consecutive missing components in a tape. 5. A tape trailer, having at least three feed holes are provided after the last component in a tape. 6. Splices should not interfere with the sprocket feed holes.
BODY HEIGHT	A	4.32		5.33		
BODY THICKNESS	T	3.18		4.19		
PITCH OF COMPONENT	P		12.7		± 1.0	
*1 FEED HOLE PITCH	Po		12.7		± 0.3	
*2 FEED HOLE CENTRE TO COMPONENT CENTRE	P2		6.35		± 0.4	
DISTANCE BETWEEN OUTER LEADS	F		5.08		+ 0.6 - 0.2	
*3 COMPONENT ALIGNMENT SIDE VIEW	Δh		0	1.0		
*4 COMPONENT ALIGNMENT FRONT VIEW	Δh1		0	1.3		
TAPE WIDTH	W		18		± 0.5	
HOLD-DOWN TAPE WIDTH	W0		6		± 0.2	
HOLE POSITION	W1		9		+ 0.7 - 0.5	
HOLD-DOWN TAPE POSITION	W2	0.0		0.7		
LEAD WIRE CLINCH HEIGHT	Ho		16		± 0.5	
COMPONENT HEIGHT	H1			24.0		
LENGTH OF SNIPPED LEADS	L			11.0		
FEED HOLE DIAMETER	Do		4		± 0.2	
*5 TOTAL TAPE THICKNESS	t			1.2		
LEAD - TO - LEAD DISTANCE	F1, F2	2.40		2.70	- 0.1	
STAND OFF	H2	0.45		1.45		
CLINCH HEIGHT	H3			3.0		
LEAD PARALLELISM	C1 - C2			0.22		
PULL - OUT FORCE	(p)	6N				
					<b>REMARKS</b> *1 Cumulative pitch error 1.0 mm/20 pitch *2 To be measured at bottom of clinch *3 At top of body *4 At top of body *5 t1 0.3 - 0.6 mm	

**Disclaimer**

The product information and the selection guides facilitate selection of the CDIL's Discrete Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Discrete Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of  
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.  
Telephone + 91-11-2579 6150, 5141 1112 Fax + 91-11-2579 5290, 5141 1119  
email@cdil.com www.cdilsemi.com