

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

| REVISIONS | | | | |
|-----------|-----|-------------|----------|----------|
| SYM | ECN | DESCRIPTION | DATE | APPROVED |
| A | | | 07/06/07 | |

D-SUB TECHNICAL DATA

Material and finish: plastic, nickel plated

Cable strain relief: Steel fibre reinforced Polycarbonate (UL94R-0) for ENI/RFI screening

Locking screws: Long solid jackscrew with full metal for indication of M3 thread

Temperatruue range: -55°C to 125°C

Cable diameter: 4.0 to 13.0mm


Attenuation factor: >40 dB between 30 MHz and 1 GHz

Meet requirements: VDE 0971, FCC 20780, 89/336/EU

MARKING : Amphenol-...(Series No.)

Commercial reference

Manufacturing date

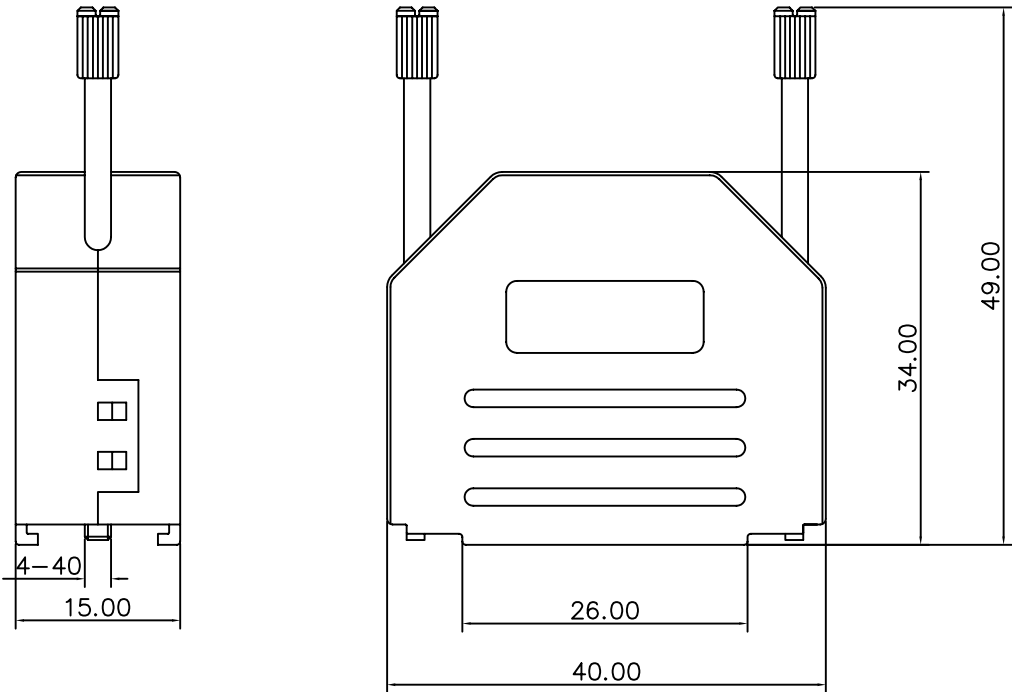

| | | | | | |
|---------------------------------------|------|---------------------------------------|-----------|----------|------------------------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES | | APPROVAL | | DATE | Amphenol |
| | | DRAWN | Lisa.peng | 07/06/07 | |
| .X +/- | 0.50 | CHECKED | kk.wang | 07/06/07 | TITLE PLASTIC HOOD |
| .XX +/- | 0.30 | CHECKED | | | |
| .XXX +/- | 0.20 | DRAWING FILE : PE master/drawing/Dsub | | | SIZE DRAWING NO. |
| FRACTIONS +/- | | REMOVE SHARP EDGES | | | A4 L17DPPK15MJS |
| ANGLES +/- | 2' | ANGLE OF PROJECTION | | | REV. A |
| FOR MATERIALS AND FINISHES SEE NOTES | | DIMENSIONS | | | SCALE NONE |
| | | U.S. INCHES | | | SHEET 1 OF 1 |
| | | METRIC MM | | | |